




LED Linear T8-Ballast Bypass

4' SINGLE-ENDED

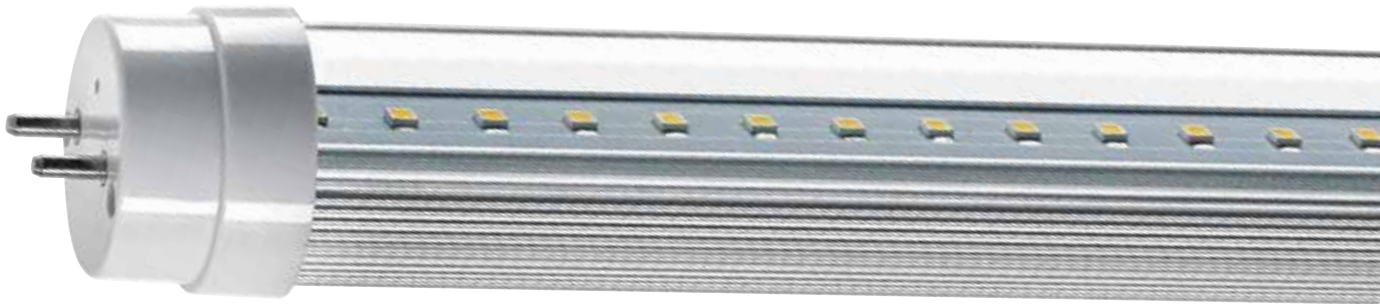

SUGGESTED APPLICATIONS

- Office, retail, hospitality, warehouse

FEATURES

- Bypass single-end connection*
- Polycarbonate lens and aluminum heat sink
- Non-shunted lampholder included
- Extremely long life and energy efficient
- No mercury
- Easy and safe replacement for fluorescent T8 systems

Specifications are subject to change without prior notice.

** Requires non-shunted lampholder for single-end connection*



**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.

GENERAL SPECIFICATIONS

Specs

- 18W
- 120-277V
- 82 CRI
- Functional Life (L70): 50,000 hrs.
- 130° Beam angle
- -20°C to 40°C Ambient temperature

LED Linear T8-Ballast Bypass

4' SINGLE-ENDED



ITEM SPECIFICATIONS / ORDER INFO

Catalog Number	Product Code	UPC Code	Color Temp	Wattage	Lumens	LPW	Case Qty
L4T8B/835/18C/SE-75	71041	751338015753	3500K	18W	2,088	116	1/20
L4T8B/840/18C/SE-75	71042	751338015760	4000K	18W	2,124	118	1/20
L4T8B/850/18C/SE-75	71043	751338015777	5000K	18W	2,160	120	1/20
L4T8B/860/18C/SE-75	71044	751338015784	6000K	18W	1220	122	1/20

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

* Requires non-shunted lampholder for single-end connection

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

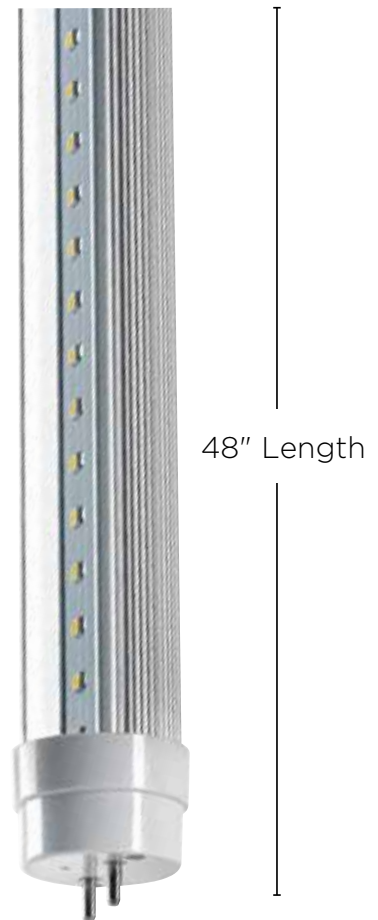

G13 Bi-pin Base

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.