



LED EXIT SIGNS - NYC APPROVED

EDGE-LIT UNIVERSAL MOUNT

SUGGESTED APPLICATIONS

- Emergency lighting for office, industrial, retail and other public spaces
- New York City applications

FEATURES

- Universal mounting with recessed and surface mount hardware included
- Adjustable galvanized steel hanger bars included for recessed mount assembly
- Mounting canopy included for surface, ceiling and wall mount options
- Extruded brushed aluminum housing with high grade acrylic panel
- Red EXIT letters - 8" height and 1" stroke
- 120/277V dual voltage operation
- Ni-Cad battery backup for 90 minutes of emergency illumination
- Test switch and AC supply indicator
- Configurable chevron directional arrows
- 100FT viewing distance rating UL924 Standard
- Available in two panel options single face clear or double face mirror insert
- Meets NFPA 70, NFPA 101, UL924, NEC and OSHA standards

FREQUENCY: 60Hz

**ENERGY USED IN
MAINTENANCE MODE:
AC SUPPLY**

RECHARGE TIME: 24 HOURS

**EMERGENCY DURATION /
RUN TIME: 90 MINUTES**

**MOUNTING HEIGHT:
7.5FT TO 15 FT**

RECYCLE TIMES: 500 CYCLES




RECESSED



**SURFACE MOUNT
SHOWN**



**MOUNTING ACCESSORIES
INCLUDED**



**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting
Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies.
All sizes and specifications are subject to change without notice.



LED EXIT SIGNS - NYC APPROVED

EDGE-LIT UNIVERSAL MOUNT

ITEM SPECIFICATIONS | ORDER INFO

MODEL #	ORDER CODE	UPC	INPUT VOLTAGE	WATTAGE	LUMINANCE (AVG)	LETTER COLOR	PANEL TYPE	NUMBER OF FACES
ESEL/SFR/RCL/B-NYC	71101	751338035768	120/277V	3W	Avg. 41 cd/m2	Red	Clear	Single Face
ESEL/DFR/RMR/B-NYC	71102	751338035782	120/277V	3W	Avg. 36 cd/m2	Red	Mirrored	Double Face

ORDERING GUIDE




EXAMPLE: ESEL/SFR/RCL/B-NYC

PRODUCT	NUMBER OF FACES	MOUNT TYPE	LETTER COLOR	PANEL TYPE	OPTION
ESEL = Exit Sign Edgelit	SF = Single Face DF = Double Face	R = Recessed	R = Red	CL = Clear MR = Mirrored	B = Battery Backup NYC = NYC Approved


DIMENSIONS | WEIGHT

MODEL #	WEIGHT (LBS) (2 DECIMALS)	PALLET QUANTITY (PCS)* 48"X40"X60"
ESEL/SFR/RCL/B-NYC	5.5	96
ESEL/DFR/RMR/B-NYC	5.5	96


*pallet qtls may vary

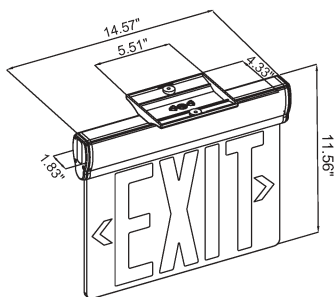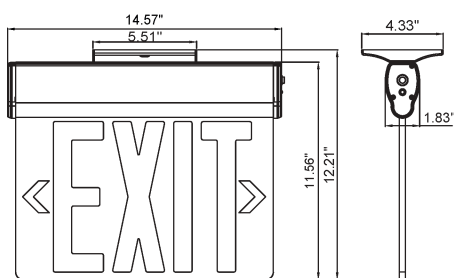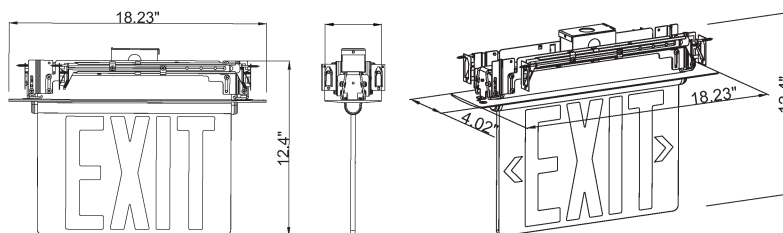

CANOPY



SIDE

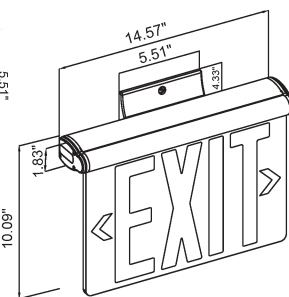

WALL

NOTES

* On all exit and emergency fixtures battery will be prorated for 5 years.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CAN-ICES-003B/NMB-003B.

Specifications are subject to change without prior notice. Replacement wattage shown depends on application and fixture.



Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.