



LED Surface Mount Disk Light WITH INTEGRATED MOTION SENSOR

Effortless and Efficient Lighting with Motion Sensor Convenience

The Topaz 6" Surface Mount Disk Light with built-in motion sensor and automatic time-out adds hands-free, quality LED lighting to storage spaces, utility rooms, pantries, and closets.

Whether ceiling or surface mounted, the Surface Mount Disk Light installs easily and fits standard 4" junction boxes. Two models are available, 3000K and 4000K CCT, and both are ENERGY STAR® certified with efficacy up to 71 LPW.

FEATURES

- Integrated PIR motion sensor with 16' diameter detection range
- 10-minute automatic time out when motion is not detected¹
- Polycarbonate lens with uniform, wide beam distribution
- Includes 360° rotatable mounting bracket to allow optimal sensor positioning*
- T24 JA8: Can be used to comply with California Energy Commission's High Efficacy LED light source requirements

SUGGESTED APPLICATIONS

- Commercial and residential
- Multi-family, hospitality, hallways, living rooms, storage areas, pantries and utility rooms
- Suitable for use in closets when installed in accordance with NFPA 70, NEC section 410.16 (A)(3) and 410.16 (C)(5)




**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.

GENERAL SPECIFICATIONS

Input Voltage, Frequency: 120V, 60Hz
Power Factor: >0.9
Efficacy: 71 LPW
Minimum CRI: 90
Beam Angle: 100°
Functional Life (L70): 50,000 hours
Location Rating: Wet
Ambient Operating Temperature: -4°F to 104°F

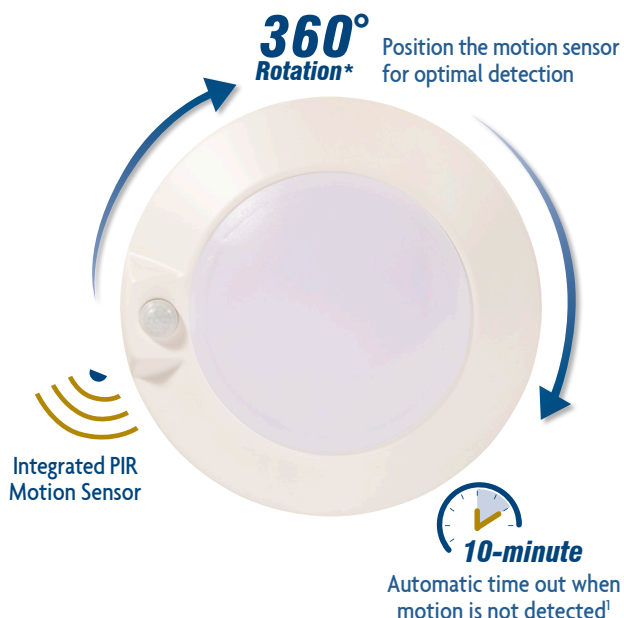

ITEM SPECIFICATIONS / ORDER INFO

Catalog Number	Order Code	Lumens	Wattage	Input Current	CCT	Size	ENERGY STAR®
SDL6-14W-30K-WH-MS	73329	990	14W	125mA	3000K	6"	Y
SDL6-14W-40K-WH-MS	73330	1,000	14W	125mA	4000K	6"	Y

NOMENCLATURE


SDL6 = 6" Surface Mount Disk LED - **14W** = 14W - **30K** = 3000K - **WH** = White - **MS** = Motion Sensor
40K = 4000K

ENERGY SAVINGS

Catalog Number	LED Wattage	Incandescent Replacement Wattage	Watts Saved	Yearly Savings	5 Year Savings
Based on 12 hours/day and \$0.11/kWh					
SDL6-14W-xxK-WH-MS	14W	75W	61W	\$30	\$150

DIMENSIONS / WEIGHTS

Catalog Number	(A)	(B)	Weight
SDL6-14W-xxK-WH-MS	7.48"	1.37"	0.7 Lbs.



NOTES:

*Approximation based on positioning of fixture on mounting bracket.

†The 10-minute timeout is factory preset with no manual override option.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Specifications subject to change without prior notice. Replacement wattage shown depends on application and fixture.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to product packaging for more information.

