



LED Low Profile Troffer CENTER BASKET

SUGGESTED APPLICATIONS

- Offices, schools, healthcare facilities, institutions and commercial applications
- New construction or retrofit applications

FEATURES

- Low profile center basket troffer with uniform and smooth light
- Steel housing, white frame with polycarbonate lens
- Slim design and lightweight construction
- Drop ceiling, recessed or surface mount installation
- Spacious junction box for easy wiring and installation
- High efficacy up to 125 LPW
- Universal input voltage 120-277V
- 54,000 hours functional life (L70)
- Pre-installed clips to safely secure fixture to the T-grid*



**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.



LED Low Profile Troffer CENTER BASKET

GENERAL SPECIFICATIONS

Input Voltage: 120-277V	Functional Life (L70): 54,000 hours
Frequency: 50/60Hz	Location Rating: Damp
Power Factor, THD %: >0.9, <20%	Ambient Operating Temperature: -4° to 113°
Dimmable: 0-10V, down to 10%	IC Rated
Efficacy: 125 LPW	Emergency Backup Compatible
Minimum CRI: 80	

ITEM SPECIFICATIONS / ORDER INFO

Model #	Order Code	UPC	Lumens	Wattage	Input Current @120V/277V	CCT	Beam Angle	DLC Classification	DLC ID*
VTC22-30-835-D-87	73497	751338044180	3,750	30W	0.275A/0.119A	3500K	120°	Standard	S-V1HJRN
VTC22-30-840-D-87	73498	751338044197	3,750	30W	0.275A/0.119A	4000K	120°	Standard	S-4M1XO3
VTC24-40-835-D-87	73499	751338044203	5,000	40W	0.367A/0.159A	3500K	120°	Premium	S-UGXA8W
VTC24-40-840-D-87	73500	751338044210	5,000	40W	0.367A/0.159A	4000K	120°	Premium	S-K4W658

NOMENCLATURE

Example: VTC22-30-835-D-87

VTC22=Volumetric Troffer Center Basket, 2' x 2' - 30=30 Watts - 835=80 CRI, 3500K CCT- D=Dimmable

VTC24=Volumetric Troffer Center Basket, 2' x 4' - 40=40 Watts - 840=80 CRI, 4000K CCT

ACCESSORIES (SOLD SEPARATELY)

Model #	Order Code	UPC	Product Title/Description
F-L22/FLANGE-87	70277	751338035423	2' x 2' Surface Mount Flange Kit
F-L22/FRAME-87	70280	751338035461	2' x 2' Surface Mount Frame Kit
F-L24/FLANGE-87	70278	751338035447	2' x 4' Sheetrock Flange Kit
F-L24/FRAME-87	70281	751338035478	2' x 4' Sheetrock Frame Kit
WD-DS710	70605	007847769237	0-10V Dimming Switch
BEL5/120-277V-92	70585	751338020177	Emergency LED Driver 120-277V

ENERGY SAVINGS Based on 12 hours/day and \$0.11/kWh


Model #	LED Wattage	Fluorescent Replacement Wattage	Watts Saved	Yearly Savings	5 Year savings
VTC22-30-835-D-87	30W	2x32 T8 UBEND NBF	28W	\$13	\$68
VTC22-30-840-D-87	30W	2x32 T8 UBEND NBF	28W	\$13	\$68
VTC24-40-835-D-87	40W	3x32 T8 NBF	47W	\$23	\$113
VTC24-40-840-D-87	40W	3x32 T8 NBF	47W	\$23	\$113

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.

DIMENSIONS/WEIGHT

Model #	A	B	C	Weight
VTC22-30-835-D-87	23.74"	23.74"	2.07"	5.73 Lbs.
VTC22-30-840-D-87	23.74"	23.74"	2.07"	5.73 Lbs.
VTC24-40-835-D-87	47.72"	23.74"	2.07"	12.45 Lbs.
VTC24-40-840-D-87	47.72"	23.74"	2.07"	12.45 Lbs.
F-L22/FRAME-87	24"	24"	4.3"	6.6 Lbs.
F-L24/FRAME-87	24"	48"	4.3"	7.6 Lbs.
F-L22/FLANGE-87	24"	24"	1.8"	5.8 Lbs.
F-L24/FLANGE-87	26"	48"	2.9"	8.5 Lbs.

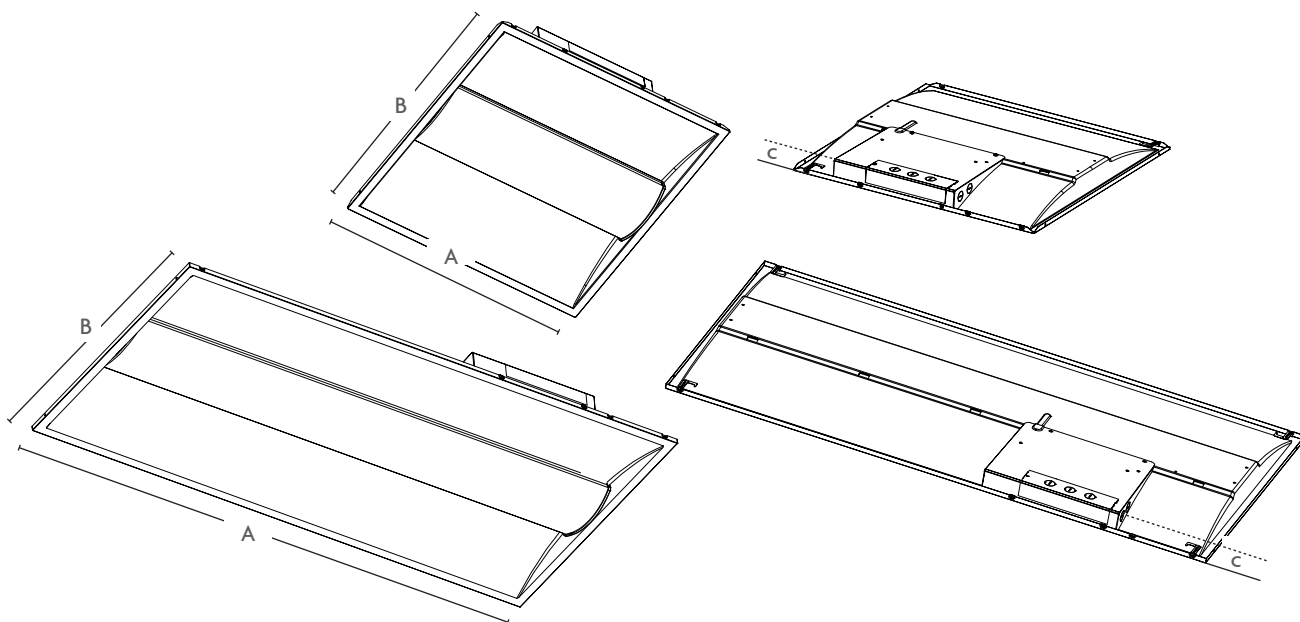


2' x 4' Sheetrock Flange Kit

2' x 4' Frame Kit

2' x 2' Sheetrock Flange Kit

2' x 2' Frame Kit

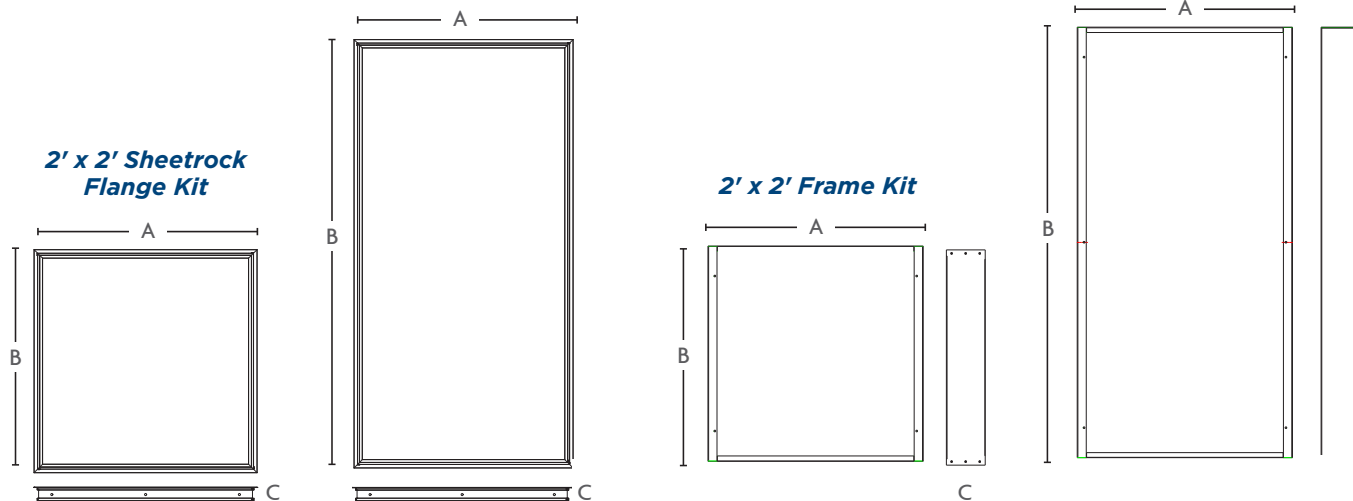

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.