

LED PLT Retrofit - Ballast Compatible

CCT SELECTABLE



9W Horizontal
2700K|3000K|3500K



9W Horizontal
3500K|4000K|5000K



9W Vertical
2700K|3000K|3500K



9W Vertical
3500K|4000K|5000K

SUGGESTED APPLICATIONS

- Replacement for 13W/18W/26W 4-pin G24q lamps
- Suitable for enclosed fixtures¹ and rated for damp locations
- Ideal for indoor recessed lighting and wall sconces in commercial, office, hospitality and retail spaces

FEATURES

- 3 CCT Selectable with warm to cool options
- Plug and play installation, no re-wiring required²
- UL Type A, compatible with most CFL electronic ballasts
- Offers up to 50% energy savings and 5X longer life expectancy than pin-based CFL lamps
- Superior lamp efficacy, up to 122 LPW
- White, polycarbonate construction with aluminum heat sink, frosted lens
- Horizontal models are rotatable up to 300 degrees



LED PLT Retrofit - Ballast Compatible

CCT SELECTABLE

GENERAL SPECIFICATIONS

Input Voltage/Frequency: Ballast Dependent
Power Factor, THD: 0.9, 20%
Input Current: Ballast Dependent
Minimum CRI: 83
Beam Angle: 120°
Functional Life (L70): 50,000 hours

Location Rating: Suitable for dry and damp locations
Ambient Operating Temperature: -4°F to 113°F
Dimmable: Down to 10%
Suitable for Enclosed Fixtures
Lamp Base Type: 4-pin G24q

ITEM SPECIFICATIONS / ORDER INFO

Catalog Number	Order Code	Operating Position	Max. Lumens	Wattage	Lamp Efficacy (LPW)	CCT	DLC ID*
LPLTA-9W-CTSC-H	73661	Horizontal	1,050 1,100 1,100	9W	117 122 122	3500K 4000K 5000K	PLO7LTS50K3G
LPLTA-9W-CTSC-V	73663	Vertical	1,050 1,100 1,100	9W	117 122 122	3500K 4000K 5000K	PL7OUL69KCA3
LPLTA-9W-CTSW-H	73660	Horizontal	1,000 1,025 1,050	9W	111 114 117	2700K 3000K 3500K	PLWYS3N4YOYQ
LPLTA-9W-CTSW-V	73662	Vertical	1,000 1,025 1,050	9W	111 114 117	2700K 3000K 3500K	PLAM4CAX6SWD

NOMENCLATURE


LPLT = Lamp PLT - A = UL Type A Ballast Compatible - 9W = 9 Watt - CTS = Color Temperature Selectable C = Cool - H = Horizontal Operating Position
 W = Warm - V = Vertical Operating Position

ENERGY SAVINGS Based on 12 hours/day and \$0.11/kWh

Catalog Number	LED Lamp Wattage	Fluorescent Replacement Wattage	Watts Saved	Yearly Savings	5 Year Savings
LPLTA-9W-CTSx-x	9W	13W 18W 26W	4W 9W 17W	\$2 \$4 \$8	\$10 \$22 \$41

DIMENSIONS / WEIGHTS

Catalog Number	MOL (A)	MOD (B)	Weight
LPLTA-9W-CTSx-H	5.9"	1.6"	0.5 Lbs.
LPLTA-9W-CTSx-V	4.6"	2.1"	0.5 Lbs.

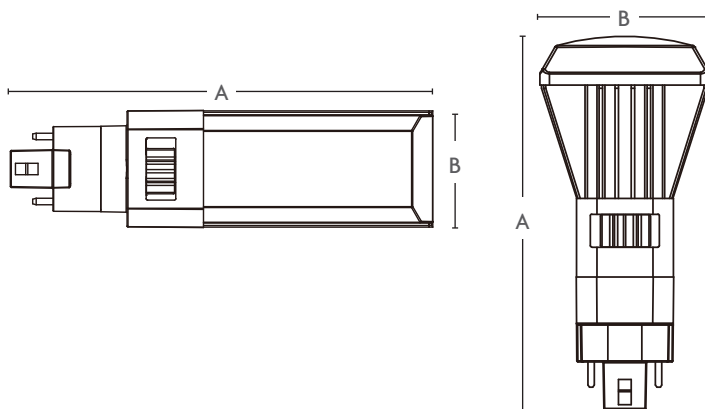

NOTES

*DLC Primary Use Designation: Replacement Lamps (plug and play) (UL Type A)

¹Suitable for enclosed fixtures provided the ambient temperature inside fixture does not exceed 113° F.

²Refer to ballast compatibility list on www.topaz-usa.com.

Dimming-This product is designed to dim with a compatible 0-10V dimming ballast and dimming control. Dimming range 100% down to 10%. Product performance may vary depending on dimmer manufacturer and circuit loading.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation.

Specifications subject to change without prior notice. Replacement wattage shown depends on application and fixture.