



LED PAR38 Lamp

CCT SELECTABLE

SUGGESTED APPLICATIONS

- High efficiency replacement for incandescent lamps
- Ideal for residential, commercial, hospitality, general lighting, recessed downlighting and task lighting
- Suitable for both open and enclosed fixtures

FEATURES

- 5 CCT Selectable: 2700K, 3000K, 3500K, 4000K and 5000K
- Simple selector switch on lamp body
- Up to 85% energy savings
- Dimmable down to 10%
- Durable plastic construction, prismatic lens



**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.



GENERAL SPECIFICATIONS

Input Voltage/Frequency: 120, 60Hz

Power Factor, THD %: 0.7, <20%

Input Current: 160mA

Minimum CRI: 80

Beam Angle: 40°

Functional Life (L70): 15,000 hours

Ambient Operating Temperature: -4°F to 104°F

CBCP (cd): 2,670

Durable construction, prismatic clear plastic

Dimmable

ITEM SPECIFICATIONS / ORDER INFO

Catalog Number	Order Code	Base	Max Lumens	Wattage	Efficacy (LPW)	CCT
LP38-14W-CTS-FL-D	73666	E26	1,200	14W	86	2700K 3000K 3500K 4000K 5000K

NOMENCLATURE

LP38 = Lamp PAR38 Shape **14W** = 14 Watt **CTS** = Color Temperature Selectable 2700K|3000K|3500K|4000K|5000K **D** = Dimmable


ENERGY SAVINGS

 Based on 12 hours/day and \$0.11/kWh

Catalog Number	LED Wattage	Incandescent Replacement Wattage	Wattage Saved	Yearly Savings	5 Year Savings
LP38-14W-CTS-FL-D	14W	120W	106W	\$51	\$255

DIMENSIONS/WEIGHTS

Catalog Number	(A)	(B)	Weight
LP38-14W-CTS-FL-D	5.08"	4.46"	0.57 Lbs.

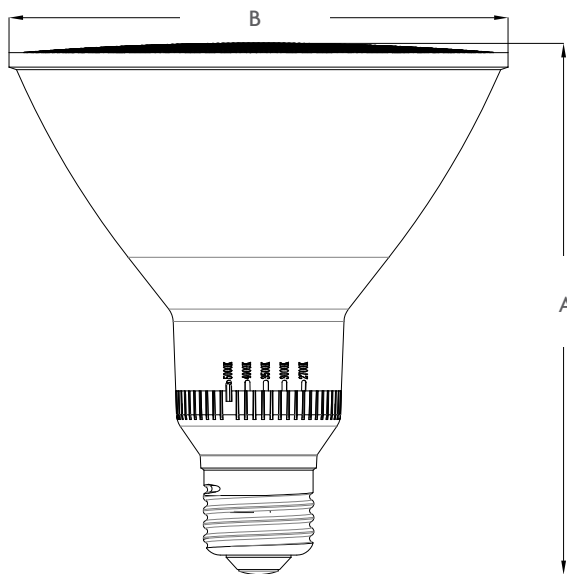

NOTES

Not for sale in California

Dimming - This product is designed to be compatible with most leading-edge type incandescent and LED style dimmers. (Dimming range 100% down to 10%).

Product performance may vary depending on dimmer manufacturer and circuit loading.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Specifications subject to change without notice.



Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.