Job Name/Title:_____ Model #:_____ Fixture Type:_____

LED LINEAR VAPOR TIGHT
POWER & CCT SELECTABLE

SUGGESTED APPLICATIONS
- Commercial
- Industrial
- Production areas
- Stairwells
- Parking garages
- Subway stations

FEATURES
- Choose 3 wattages and 3 color temperature at installation for 9 possible configurations on select models[1]
- Meets harsh demands IP66 Rated, IK09 impact rating, NEMA 4X housing
- ETL Sanitation Listed NSF/ANSI Standard 2 - Food Equipment, Splash Zone (Not for Direct Food Zone)
- Stainless-steel latching clips offer easy toolless entry
- Durable UL 5VA flame rated polycarbonate lens and gray housing
- ½" NPT threaded hubs for conduit and cord/bushing entry for continuous end-to-end connection
- Surface mount installation accessories included, J-Box, angle, and suspended mount cable kits sold separately
- Available in 2' 4', 8' lengths with emergency battery backup and motion sensor models available

INPUT VOLTAGE: 120-277V

FREQUENCY: 50/60Hz

POWER FACTOR, THD %:
>0.9, <20%

DIMMABLE: 0-10V,
DOWN TO 10%[2]

EFFICACY: 145 LPW

MINIMUM CRI: 80

FUNCTIONAL LIFE (L70):
50,000 HOURS

LOCATION RATING: WET

AMBIENT OPERATING TEMPERATURE:
STANDARD:
-40°F TO 113°F
MODELS W/ EM, MS:
-0°F TO 113°F

2 FT.

4 FT.

8 FT.

DLC LISTED · DLC LISTED PREMIUM · ETL LISTED Intertek · ETL Intertek · DIMMABLE LED · 5 YEAR WARRANTY · WET LOCATION · IP66 WATERPROOF · RoHS · 3 3500K 4000K 5000K CCT SELECT · POWER SELECT

BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612 Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.

Job Name/Title:_____ Model #:_____ Fixture Type:_____

LED LINEAR VAPOR TIGHT
POWER & CCT SELECTABLE

ITEM SPECIFICATIONS | ORDER INFO

MODEL #	ORDER CODE	UPC	SIZE (TRADE)	LUMENS	WATTAGE	INPUT CURRENT @120/277V	CCT	DLC ID[2] STANDARD	DLC[3] PREMIUM
LVT2-20-CS	73811	032886300608	2'	2,600	20W	0.183/0.079A	3500K 4000K* 5000K	S-XSTL78	S-70613C
LVT4-50PCS	73814	032886300639	4'	4,350 5,800 7,250	30W 40W 50W*	0.275/0.119A 0.367/0.159A 0.458A/0.199A	3500K 4000K* 5000K	S-WXM0IJ	S-RSLY0U
LVT4-50PCS-EM	73815	032886300646	4'	4,350 5,800 7,250	30W 40W 50W*	0.275/0.119A 0.367/0.159A 0.458A/0.199A	3500K 4000K* 5000K	S-WXM0IJ	S-RSLY0U
LVT4-50PCS-EMS	73816	032886300660	4'	4,350 5,800 7,250	30W 40W 50W*	0.275/0.119A 0.367/0.159A 0.458A/0.199A	3500K 4000K* 5000K	S-WXM0IJ	S-RSLY0U
LVT4-50PCS-MS	73817	032886300653	4'	4,350 5,800 7,250	30W 40W 50W*	0.275/0.119A 0.367/0.159A 0.458A/0.199A	3500K 4000K* 5000K	S-WXM0IJ	S-RSLY0U
LVT8-70PCS	73818	032886300677	8'	7,250 8,700 10,150	50W 60W 70W*	0.458/0.199A 0.55/0.238A 0.624/0.278A	3500K 4000K* 5000K	S-MD7JUQ	S-HJM13A
LVT8-70PCS-EM	73819	032886300684	8'	7,250 8,700 10,150	50W 60W 70W*	0.458/0.199A 0.55/0.238A 0.624/0.278A	3500K 4000K* 5000K	S-MD7JUQ	S-HJM13A
LVT8-70PCS-MS	73820	032886300691	8'	7,250 8,700 10,150	50W 60W 70W*	0.458/0.199A 0.55/0.238A 0.624/0.278A	3500K 4000K* 5000K	S-MD7JUQ	S-HJM13A

NOMENCLATURE

EXAMPLE: LVT4-50PCS-EMS

PRODUCT	SIZE	WATTAGE	CCT	OPTIONS
Linear Vapor Tight	**2** = 2 Ft. **4** = 4 Ft. **8** = 8 Ft.	**20** = 20W **50P** = 30W/40W/50W selectable **70P** = 50W/60W/70W selectable	**CS** = Color temperature selectable	**EM** = Emergency battery backup **EMS** = Emergency battery backup & motion sensor **MS** = Motion sensor

ACCESSORIES (SOLD SEPARATELY)

MODEL #	ORDER CODE	UPC	DESCRIPTION
LVT-ANGL-MNT	73821	032886300714	ANGLE MOUNT KIT
LVT-JBOX-MNT	73822	032886300707	J-BOX MOUNT KIT
F-LED-CABLE 2PK	72708	751338027428	5.5' SUSPENDED MOUNT CABLE KIT

LVT-ANGL-MNT

LVT-JBOX-MNT

F-LED-CABLE 2PK

BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies.
All sizes and specifications are subject to change without notice.

Job Name/Title:_____ Model #:_____ Fixture Type:_____

LED LINEAR VAPOR TIGHT
POWER & CCT SELECTABLE

MOTION SENSOR PRE-PROGRAMMED SETTINGS

SENSITIVITY	HOLD TIME	DAYLIGHT THRESHOLD	STANDBY DIMMING LEVEL	STANDBY DIMMING PERIOD
100%	10 MINUTES	DISABLE	10%	INFINITY

ENERGY SAVINGS *Based on 12 hours/day and $0.11/kWh*

MODEL #	LED WATTAGE	FLUORESCENT REPLACEMENT WATTAGE	WATTS SAVED	YEARLY SAVINGS	5 YEAR SAVINGS
LVT2-20-CS	20W	1 x 32W T8	12W	$6	$29
LVT4-50PCS-XXX	30W	1 x 54W T5	24W	$12	$58
LVT4-50PCS-XXX	40W	2 x 32W T8	20W	$10	$48
LVT4-50PCS-XXX	50W	2 x 54W T5	58W	$28	$140
LVT8-70PCS-XXX	50W	F96T12 HO 110W	60W	$29	$145
LVT8-70PCS-XXX	60W	F96T12 HO 110W	50W	$24	$120
LVT8-70PCS-XXX	70W	F96T12 VHO 185W	115W	$55	$277

DIMENSIONS/WEIGHT

MODEL #	A	B	C	WEIGHT (LBS.)	KNOCKOUTS
LVT2-20-CS	23.6"	4.33"	3.46"	3.3	(2) 1/2" NPT threaded hubs
LVT4-50PCS	47.24"	4.33"	3.46"	4.9	(3) 1/2" NPT threaded hubs
LVT4-50PCS-EM	47.24"	4.33"	3.46"	6	(3) 1/2" NPT threaded hubs
LVT4-50PCS-EMS	47.24"	4.33"	3.46"	6.1	(3) 1/2" NPT threaded hubs
LVT4-50PCS-MS	47.24"	4.33"	3.46"	5	(3) 1/2" NPT threaded hubs
LVT8-70PCS	94.49"	4.33"	3.46"	9.9	(3) 1/2" NPT threaded hubs
LVT8-70PCS-EM	94.49"	4.33"	3.46"	11	(3) 1/2" NPT threaded hubs
LVT8-70PCS-MS	94.49"	4.33"	3.46"	10	(3) 1/2" NPT threaded hubs

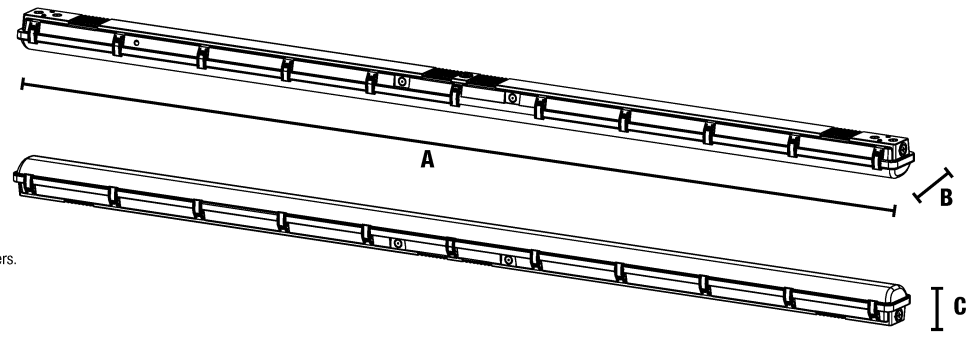

NOTES

[1]LVT2-20-CS is CCT selectable only.
Motion sensor models are non-dimmable.
[2]DLC Primary Use- Standard: Direct Linear Ambient Luminaires
[3]DLC Primary Use- Premium: Stairwell and Passageway Luminaires
Dimming- Dimming with standard 0-10V control system or wall dimmers.
Dimming complies with IEC60929 Annex E. Fixture may not be compatible with all dimmers.
Dimming performance may vary based on selected dimmer.

BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies.
All sizes and specifications are subject to change without notice.