



LED LINEAR WRAP MODERN

SUGGESTED APPLICATIONS

- Commercial, residential
- New construction or remodel
- Offices, schools, retail, general task lighting
- Suitable for use in closets: Compliant with NFPA 70 NEC section 410.16 (A)(3) and 410.16 (C)(5)

FEATURES

- CCT Selectable switch 3500K/4000K/5000K available on select models
- Efficient replacement for traditional fluorescent fixtures
- Side ½" knockouts allow easy access connection for wire and conduit
- Smooth 0-10V dimming, down to 10%
- Sleek modern white steel housing with frosted polycarbonate lens
- Surface mount hardware included
- Emergency battery backup models available



INPUT VOLTAGE: 120-277V

FREQUENCY: 50/60HZ

POWER FACTOR, THD %:
>0.9;<20%


DIMMABLE: 0-10V,
DOWN TO 10%

EFFICACY: UP TO 115 LPW

CRI: 80

BEAM ANGLE: 105°

LIFETIME (L70): 50,000 HOURS



Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting
Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies.
All sizes and specifications are subject to change without notice.



LED LINEAR WRAP MODERN

ITEM SPECIFICATIONS | ORDER INFO

MODEL #	ORDER CODE	UPC	SIZE (TRADE)	LUMENS	WATTAGE	INPUT CURRENT @120V/277V	CCT	DLC ID
LWRAP2-25-40K-D	74422	032886304729	2FT	2,875	25W	0.20/0.11A	4000K	S-394SPW
LWRAP2-25-50K-D	74423	032886304736	2FT	2,875	25W	0.20/0.11A	5000K	S-8IU4SZ
LWRAP4-48-40K-D	74424	032886304743	4FT	5,520	48W	0.40/0.19A	4000K	S-UPKL02
LWRAP4-48-50K-D	74425	032886304750	4FT	5,520	48W	0.40/0.19A	5000K	S-215VYR
LWRAP4-48-CS-D	74426	032886304774	4FT	5,500 5,520 5,500	48W	0.40/0.19A	3500K 4000K* 5000K	S-GDCNOF
LWRAP4EM-48-CS-D	74427	032886304767	4FT	4,900 5,000 4,900	48W	0.40/0.19A	3500K 4000K* 5000K	---

*DEFAULT CCT SELECT SETTING

NOMENCLATURE

Example: LWRAP4EM-48-CS-D

PRODUCT	SIZE	WATTAGE	CCT	OPTIONS
LWRAP = LINEAR WRAP	2FT 4FT	25W 48W	4000K 5000K CS = COLOR SELECTABLE	EM = EMERGENCY BATTERY BACKUP D = DIMMABLE

ACCESSORIES (SOLD SEPARATELY)

MODEL #	ORDER CODE	UPC	DESCRIPTION
BEL4W-UNV	72764	---	LED Emergency Driver
WD-OS	72700	751338004931	Occupancy Sensor






LED LINEAR WRAP MODERN

ENERGY SAVINGS Based on 12 hours/day and \$0.11/kWh

MODEL #	LED WATTAGE	FLUORESCENT REPLACEMENT WATTAGE	WATTS SAVED	YEARLY SAVINGS	5 YEAR SAVINGS
LWRAP2-25-xxK-D	25W	2x 17W T8	5W	\$2	\$12
LWRAP4-48-xxK-D	48W	2x 32W T8	12W	\$6	\$29

DIMENSIONS | WEIGHT

MODEL #	A (IN)	B (IN)	C (IN)	WEIGHT (LBS)
LWRAP2-25-xxK-D	21.25	5.31	2.16	1.54
LWRAP4-48-xxK-D	47.2	5.31	2.16	2.75
LWRAP4EM-48-CS-D	47.2	5.31	2.16	5.63

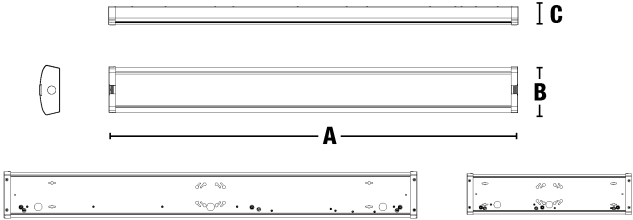

NOTES

DLC Primary Use - Direct Linear Ambient Luminaires
Dimming with standard 0-10V control system or wall dimmers. Dimming complies with IEC60929 Annex E. Fixture may not be compatible with all dimmers. Dimming performance may vary based on selected dimmer.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Specifications are subject to change without prior notice. Replacement wattage shown depends on application and fixture.

