




LED LINEAR HIGH BAY



POWER
SELECT

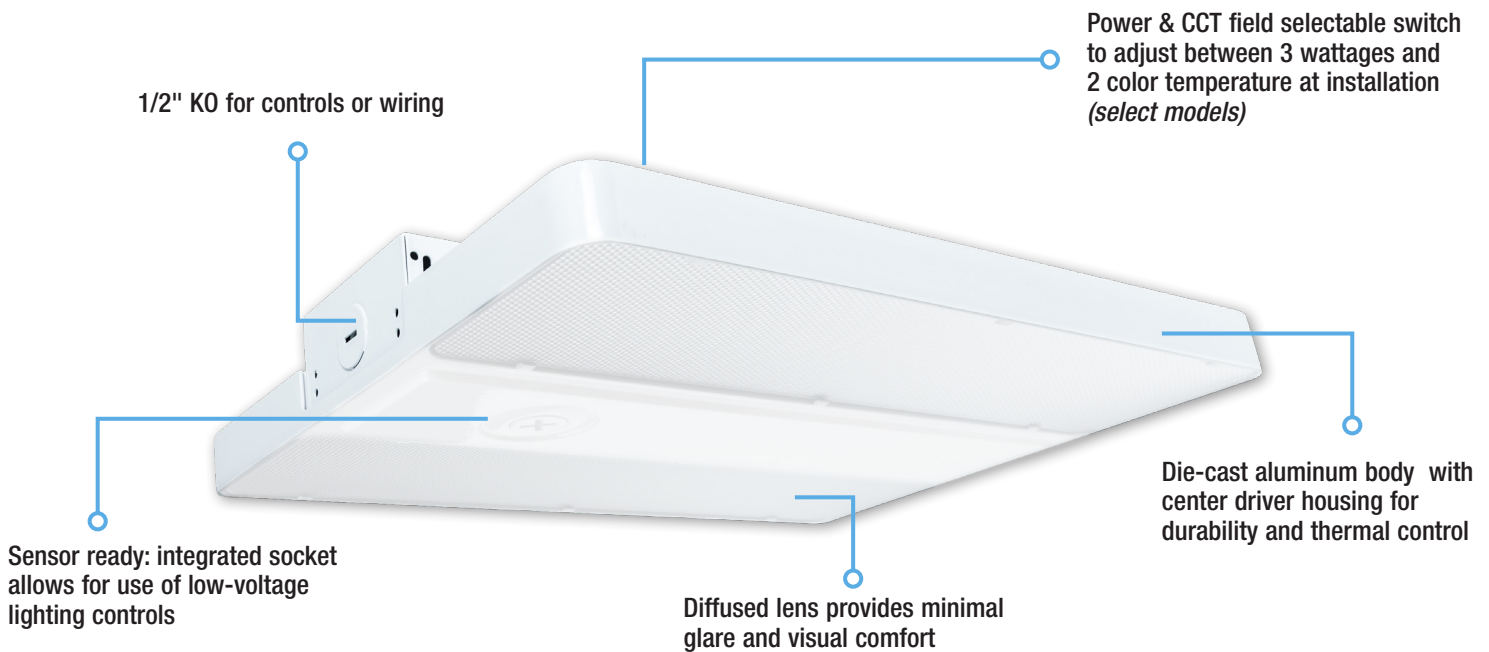

REPLACEMENT FOR MULTI-LAMP FLUORESCENT OR HID HIGH BAY LUMINARIES



- **COMMERCIAL, INDUSTRIAL**
- **HIGH CEILING APPLICATIONS**
- **MANUFACTURING FACILITIES**
- **BIG BOX RETAIL**
- **WAREHOUSES**
- **GYMNASIUMS**



**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.



LED LINEAR HIGH BAY



CONSTRUCTION

- Die-cast aluminum body with center driver housing for durability and thermal control
- White powder coat finish
- Wide 90°, optically enhanced lens for added glare control
- UGR rating < 28
- CRI: 80

ELECTRICAL

- Standard 0-10V dimming
- Multi-volt driver, 120-277V standard
- High Voltage 277-480V model available
- Long life LED system with greater than 50,000 hours
- Power Factor ≥ 0.9 , THD% $\leq 20\%$
- 6kV surge protection rating

INSTALLATION

- Suspension mount ready, V-hook & chain included
- Surface mount and pendant mount kits sold separately
- Wire guards available for additional protection

EMERGENCY BATTERY BACKUP

- Select models with integrated emergency battery backup
- 90 minute battery backup with constant power to LED system
- Field install, 120-277V Universal input emergency driver accessory available
- Minimum starting temperature for battery 32°F

CONTROLS

- Low voltage sensor receptacle for sensor install
- Plug and play low voltage PIR sensor and remote control accessory available
- Line voltage PIR sensor accessory available for use with 120-277V
- 0-10V dimming standard on all fixtures

COMPLIANCE

- cULus listed for damp location
- FCC part 15
- -40°F to 131°F ambient operating temperatures
- 5-year limited warranty

ORDERING GUIDE

Example: LHB-30L-W-PCS-HVEM



PRODUCT	LUMEN PACKAGE	BEAM ANGLE	CCT	OPTIONS
LHB = LINEAR HIGH BAY	18L = 18,000L 24L = 24,000L 30L = 30,000L 36L = 36,000L 48L = 48,000L 63L = 63,000L	W = WIDE BEAM ANGLE	40K = 4000K 50K = 5000K	U = UNIVERSAL VOLTAGE (120-277) HV = HIGH VOLTAGE (277-480V) EM = EMERGENCY BATTERY BACKUP
	POWER SELECTABLE MODELS 15L = 9,500/12,500/15,000L 30L = 18,600/24,000/30,000L		PCS = POWER SELECTABLE & CCT SELECTABLE 3500K/4000K/5000K	

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.



LED LINEAR HIGH BAY



ITEM SPECIFICATIONS | ORDER INFO

MODEL #	ORDER CODE	UPC	INPUT VOLTAGE MAX. INPUT CURRENT	WATTAGE	CCT	LUMENS	EFFICACY (LM/W)	HID REPLACEMENT	FLOURESCENT REPLACEMENT	TYPICAL MOUNTING HEIGHT
LHB-15L-W-PCS-U	75829	032886308765	120-277V 1.0/0.44A	60W	3500K	9,400	157	100W	4-LAMP 32W T8/NBF	12-20FT
					4000K	9,600	160			
					5000K	9,500	158			
				80W	3500K	12,400	155	175W	4-LAMP 32W T8/HBF	
					4000K	12,700	159			
					5000K	12,500	156			
				100W	3500K	14,200	142	200W	6-LAMP 32W T8/NBF	
					4000K	15,600	156			
					5000K	15,000	150			
LHB-30L-W-PCS-U LHB-30L-W-PCS-UEM (battery backup)	75827 75825	032886308741 032886308727	120-277V 2.0/0.88A	120W	3500K	18,500	154	250W	6-LAMP 32W T8/NBF	25-35FT
					4000K	18,800	157			
					5000K	18,600	155			
				160W	3500K	23,500	147	400W	6-LAMP 54W T5/HO	
					4000K	29,000	181			
					5000K	24,000	150			
				200W	3500K	28,600	143	575W	10 LAMP 32W T8/HBF	
					4000K	31,000	155			
					5000K	30,000	150			
LHB-30L-W-PCS-HV LHB-30L-W-PCS-HVEM (battery backup)	75828 75826	032886308758 032886308734	277-480V 0.8/0.51A	120W	3500K	18,500	154	250W	6-LAMP 32W T8/NBF	25-35FT
					4000K	18,800	157			
					5000K	18,600	155			
				160W	3500K	23,500	147	400W	6-LAMP 54W T5/HO	
					4000K	29,000	181			
					5000K	24,000	150			
				200W	3500K	28,600	143	575W	10 LAMP 32W T8/HBF	
					4000K	31,000	155			
					5000K	30,000	150			

EM DATA

MODEL #	INPUT VOLTAGE	EM WATTAGE	EM LUMENS	MIN. STARTING TEMP
LHB-30L-W-PCS-UEM	120-277V	16W	4,150	32°F
LHB-30L-W-PCS-HVEM	277-480V	20W	5,660	32°F





LED LINEAR HIGH BAY (CONTINUED)

MAX. AMBIENT OPERATING TEMP.	L70 LUMEN MAINTENANCE
77°F	>100,000 HOURS
131°F	50,000 HOURS

ITEM SPECIFICATIONS | ORDER INFO

MODEL #	ORDER CODE	UPC	INPUT VOLTAGE MAX. INPUT CURRENT	WATTAGE	CCT	LUMENS	EFFICACY (LM/W)	HID REPLACEMENT	FLUORESCENT REPLACEMENT	TYPICAL MOUNTING HEIGHT
LHB-18L-W-40K-U	75830	032886308772	120-277V 1.2/0.52A	120W	4000K	18,000	150	250W	6-LAMP 32W T8 NBF	15-20FT
LHB-18L-W-50K-U	75831	032886308789			5000K					
LHB-24L-W-40K-U	75832	032886308796	120-277V 1.6/0.70A	160W	4000K	24,000	150	400W	6-LAMP 54W T5/HO	20-30FT
LHB-24L-W-50K-U	75833	032886308802			5000K					
LHB-30L-W-40K-U	75834	032886308819	120-277V 2.0/0.88A	200W	4000K	30,000	150	575W	10 LAMP T8/HBF	25-35FT
LHB-30L-W-50K-U	75835	032886308826			5000K					
LHB-36L-W-40K-U	75836	032886308833	120-277V 2.4/1.05A	240W	4000K	36,000	150	750W	8-LAMP 54W T5/HO	30-40FT
LHB-36L-W-50K-U	75837	032886308840			5000K					
LHB-48L-W-40K-U	75838	032886308857	120-277V 3.2/1.41A	320W	4000K	48,000	150	875W	10-LAMP 54W T5/HO	40-50FT
LHB-48L-W-50K-U	75839	032886308864			5000K					
LHB-63L-W-40K-U	75840	032886308871	120-277V 4.2/1.85A	420W	4000K	63,000	150	1000W	---	50-60FT
LHB-63L-W-50K-U	75841	032886308888			5000K					

DLC INFORMATION

MODEL #	DLC I.D.	DLC CLASSIFICATION	DLC PRIMARY USE
LHB-15L-W-PCS-U	S-83IGRV	PREMIUM	HIGH-BAY LUMINAIRES FOR COMMERCIAL AND INDUSTRIAL BUILDINGS
LHB-30L-W-PCS-U	S-UPQ3EZ		
LHB-30L-W-PCS-HV	S-ZM3CVU		
LHB-30L-W-PCS-UEM	S-UPQ3EZ		
LHB-30L-W-PCS-HVEM	S-ZM3CVU		
LHB-18L-W-40K-U	S-K2XUFI		
LHB-18L-W-50K-U	S-VIS2WY		
LHB-24L-W-40K-U	S-YNJPGF		

MODEL #	DLC I.D.	DLC CLASSIFICATION	DLC PRIMARY USE
LHB-24L-W-50K-U	S-QBPOMF	PREMIUM	HIGH-BAY LUMINAIRES FOR COMMERCIAL AND INDUSTRIAL BUILDINGS
LHB-30L-W-40K-U	S-CM15J9		
LHB-30L-W-50K-U	S-LV460C		
LHB-36L-W-40K-U	S-VDRYOL		
LHB-36L-W-50K-U	S-841ZSI		
LHB-48L-W-40K-U	S-JT53CP		
LHB-48L-W-50K-U	S-Z7QPRT		
LHB-63L-W-40K-U	S-RQWBEM		
LHB-63L-W-50K-U	S-DPQ7JL		

NOTES

Dimming with standard 0-10V control system or wall dimmers. Dimming complies with IEC60929 Annex E. Fixture may not be compatible with all dimmers. Dimming performance may vary based on selected dimmer.

Power & CCT selectable models: default settings are 5000K at the highest wattage






LED LINEAR HIGH BAY



POWER & CCT SELECTABLE SWITCH




EM PUSH TO TEST BUTTON

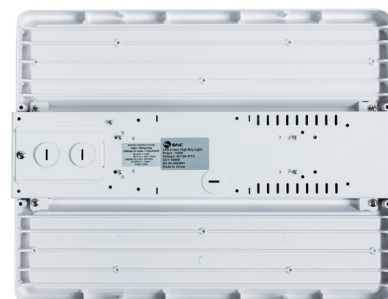

DIMENSIONS | WEIGHT

MODEL #	A (IN)	B (IN)	C (IN)	WEIGHT (LBS)	PALLET QUANTITY (PCS)* 48" X 40" X 60"
LHB-15L-W-PCS-U	14.2	11	1.89	4.19	168
LHB-30L-W-PCS-U	18.1	11.8	1.89	5.95	210
LHB-30L-W-PCS-UEM				8.6	81
LHB-30L-W-PCS-HV	23	12.6	1.89	7.27	210
LHB-30L-W-PCS-HVEM				9.8	60
LHB-18L-W-40K-U	14.2	11	1.89	4.4	168
LHB-18L-W-50K-U					
LHB-24L-W-40K-U	18	11.8	1.89	5.51	168
LHB-24L-W-50K-U					
LHB-30L-W-40K-U	18.1	11.8	1.89	5.95	168
LHB-30L-W-50K-U					
LHB-36L-W-40K-U	23	12.6	1.89	7.27	168
LHB-36L-W-50K-U					
LHB-48L-W-40K-U	23	12.6	1.89	7.93	168
LHB-48L-W-50K-U					
LHB-63L-W-40K-U	46	12.6	1.89	17.19	156
LHB-63L-W-50K-U					

* Pallet quantities may vary

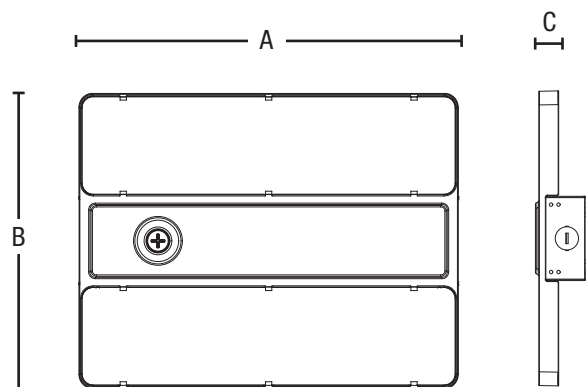

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.



LED LINEAR HIGH BAY



LHB-SMB1
LHB-SMB2



LHB-PMB1
LHB-PMB2



LHB-WG1
LHB-WG2
LHB-WG3
LHB-WG4



OS-PIR-12V
OS-PIR-BT-12V



F-LHUB/RC/G3

ACCESSORIES (SOLD SEPARATELY)

MODEL #	ORDER CODE	DESCRIPTION
LHB-SMB1	75842	SURFACE MOUNT BRACKET FOR 14"-18" LINEAR HIGH BAYS
LHB-SMB2	75843	SURFACE MOUNT BRACKET FOR 23"-46" LINEAR HIGH BAYS
LHB-PMB1	75844	PENDANT MOUNT BRACKET FOR 14"-18" LINEAR HIGH BAYS
LHB-PMB2	75845	PENDANT MOUNT BRACKET FOR 23"-46" LINEAR HIGH BAYS
LHB-WG1	75846	WIRE GUARD FOR 14" LINEAR HIGH BAY
LHB-WG2	75847	WIRE GUARD FOR 18" LINEAR HIGH BAY
LHB-WG3	75848	WIRE GUARD FOR 23" LINEAR HIGH BAY
LHB-WG4	75849	WIRE GUARD FOR 46" LINEAR HIGH BAY
OS-PIR-12V	75851	OCCUPANCY SENSOR, PIR, 12V, EASY PLUG-IN INSTALLATION
OS-PIR-BT-12V	75852	OCCUPANCY SENSOR, PIR, 12V, BLUETOOTH®, EASY PLUG-IN INSTALLATION
F-LHUB/RC/G3	72725	REMOTE CONTROL FOR 12V OCCUPANCY SENSORS (ORDER ONE PER PROJECT)
LHB-EM-25W-UNV	75853	EMERGENCY BATTERY BACKUP KIT 25W 120-277V
CS515-12-WH	74441	12FT CORDSET 120V NEMA 5-15 15A STRAIGHT BLADE- WHITE
CS715-12-WH	74442	12FT CORDSET 277V NEMA 7-15 15A STRAIGHT BLADE-WHITE
CSL515-12-WH	74443	12FT CORDSET 120V NEMA L5-15 15A TWIST LOCK-WHITE
CSL715-12-WH	74444	12FT CORDSET 277V NEMA L7-15 15A TWIST LOCK-WHITE
CSL820-12-WH	74445	12FT CORDSET 480V NEMA L8-20 20A TWIST LOCK-WHITE



CS515-12-WH



CS715-12-WH



CSL715-12-WH

MOTION SENSOR PRE-PROGRAMMED SETTINGS

MODEL #	DESCRIPTION	SENSITIVITY	HOLD TIME	DAYLIGHT THRESHOLD	STANDBY DIMMING LEVEL	STANDBY DIMMING PERIOD
OS-PIR-12V	OCCUPANCY SENSOR, PIR, 12V, EASY PLUG-IN INSTALLATION	100%	5 MIN	DISABLE	30%	60 MIN
OS-PIR-BT-12V	OCCUPANCY SENSOR, PIR, 12V, BLUETOOTH®, EASY PLUG-IN INSTALLATION	100%	1 MIN	DISABLE	30%	30 MIN

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.



LED LINEAR HIGH BAY

ACCESSORY COMPATIBILITY

FIXTURE MODEL #	WATTAGE	FIXTURE LENGTH	SURFACE MOUNT BRACKET	PENDANT MOUNT BRACKET	WIRE GUARD
LHB-18L-W-40K-U	120W	14"	LHB-SMB1	LHB-PMB1	LHB-WG1
LHB-18L-W-50K-U					
LHB-24L-W-40K-U	160W	18"	LHB-SMB1	LHB-PMB1	LHB-WG2
LHB-24L-W-50K-U					
LHB-30L-W-40K-U	200W	18"	LHB-SMB1	LHB-PMB1	LHB-WG2
LHB-30L-W-50K-U					
LHB-36L-W-40K-U	240W	23"	LHB-SMB2	LHB-PMB2	LHB-WG3
LHB-36L-W-50K-U					
LHB-48L-W-40K-U	320W	23"	LHB-SMB2	LHB-PMB2	LHB-WG3
LHB-48L-W-50K-U					
LHB-63L-W-40K-U	420W	46"	LHB-SMB2	LHB-PMB2	LHB-WG4
LHB-63L-W-50K-U					
POWER & CCT SELECTABLE					
LHB-15L-W-PCS-U	60W	14"	LHB-SMB1	LHB-PMB1	LHB-WG1
	80W				
	100W				
LHB-30L-W-PCS-U LHB-30L-W-PCS-UEM	120W	18"	LHB-SMB1	LHB-PMB1	LHB-WG2
	160W				
	200W				
LHB-30L-W-PCS-HV LHB-30L-W-PCS-HVEM	120W	23"	LHB-SMB2	LHB-PMB2	LHB-WG3
	160W				
	200W				

