



LED Linear Lighting

42W 8 FT DOUBLE-ENDED LED R17D BASE RETROFIT FROSTED T8 WITH INTERNAL DRIVER

Features

- PET-Coated glass tube construction
- Ballast bypass, double-end connection
- Designed for retrofit use in HO fixtures
- Replacement for 8 ft. 86W T8/HO or 110W T12/HO
- Extremely long life and energy efficient
- Contains no mercury

Specs


- 120-277V
- 82 CRI
- 160° Beam spread
- 50,000 Hours functional life (L70)
- -40° to 105°F Ambient operating temperature

Applications

- Replacement for linear fluorescent
- Offices, retail, commercial fixtures



R17d
(Recessed Double Contact Base)

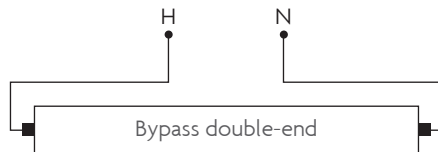

Catalog Number	Order Code	UPC	Watts	CCT	Lumens	LPW	Input Amps 120/277V	Case Qty
L8T8B/840/42F/R17D	74538	751338030886	42W	4000K	5,400	129	0.4 / 0.2	10-PK
L8T8B/850/42F/R17D	74539	751338030893	42W	5000K	5,500	131	0.4 / 0.2	10-PK
L8T8B/865/42F/R17D	74540	751338032118	42W	6500K	5,500	131	0.4 / 0.2	10-PK

