Job Name/Title:_____ Model #:_____ Fixture Type:_____

LED SLIM FIT RECESSED DOWNLIGHTS

CCT SELECTABLE

SUGGESTED APPLICATIONS

- Retrofit and new construction
- Commercial, residential and multi-family buildings
- Low clearance areas, closets, stairwells, soffits, bathroom, and living areas

FEATURES

- Ultra-thin white aluminum die-cast construction
- Acrylic lens
- Recessed housing not required, remote J-box provides flexibility in mounting
- Low profile design with white aluminum trim and polycarbonate lens
- Airtight certified per ASTM-E283
- Remote J-box provides flexibility in mounting
- Available in 3", 4", 6", 8" sizes with round, square and gimbal shapes

INPUT VOLTAGE: 120V

FREQUENCY: 60Hz

POWER FACTOR: >.9

EFFICACY: 84 LPW

CRI: 90

BEAM ANGLE: 110°

LIFETIME (L70):
UP TO 50,000 HOURS

3" ROUND

4" ROUND

4" SQUARE

4" ADJUSTABLE

5 CCT SELECT 2700K 3000K 3500K 4000K 5000K | ENERGY STAR | c UL us LISTED | c ETL LISTED us Intertek | CAN BE USED TO COMPLY WITH T24 JA8 HIGH EFFICACY LIGHTING REQUIREMENT | DIMMABLE LED | DAMP LOCATION | WET LOCATION | RoHS | 5 YEAR WARRANTY | 90 CRI | AMBIENT OPERATING TEMPERATURE TEMP RANGE -4°F to 113°F

BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies.
All sizes and specifications are subject to change without notice.

Job Name/Title:_____ Model #:_____ Fixture Type:_____

TOPAZ®

LED SLIM FIT RECESSED DOWNLIGHTS

CCT SELECTABLE

ITEM SPECIFICATIONS | ORDER INFO

MODEL #	ORDER CODE	UPC	LUMENS	WATTAGE	INPUT VOLTAGE	5 CCT SELECTABLE	HOUSING SIZE	INCANDESCENT REPLACEMENT WATTAGE	ENERGY STAR	CA T24 JA8
ROUND										
RDL3-7W-CS	76858	032886120015	580	7W	120V	2700K/3000K/3500K/4000K/5000K	3"	50W	Y	Y
RDL4-8W-CS	76859	032886120022	620	7.5W	120V	2700K/3000K/3500K/4000K/5000K	4"	50W	Y	Y
RDL6-10W-CS	76860	032886193378	830	9.5W	120V	2700K/3000K/3500K/4000K/5000K	6"	65W	Y	Y
RDL6-12W-CS	76861	032886120008	1,000	12W	120V	2700K/3000K/3500K/4000K/5000K	6"	75W	Y	Y
RDL/8RND/18/5CTS*	71085	751338038660	1,600	18W	120V	2700K/3000K/3500K/4000K/5000K	8"	100W	Y	Y
SQUARE										
RDL4-SQ-7W-CS	76862	032886193385	590	7W	120V	2700K/3000K/3500K/4000K/5000K	4"	50W	Y	Y
RDL6-SQ-9W-CS	76863	032886193392	760	9W	120V	2700K/3000K/3500K/4000K/5000K	6"	65W	Y	Y
RDL6-SQ-12W-CS	76864	032886193408	1,000	12W	120V	2700K/3000K/3500K/4000K/5000K	6"	75W	Y	Y
ADJUSTABLE										
RDL4-ADJ-7W-CS	76865	032886193415	580	7W	120V	2700K/3000K/3500K/4000K/5000K	4"	50W	Y	Y
RDL4-ADJ-10W-CS	76866	032886193422	780	9.5W	120V	2700K/3000K/3500K/4000K/5000K	4"	65W	Y	Y
RDL4-ADJ-12W-CS	76867	032886193439	1,000	12W	120V	2700K/3000K/3500K/4000K/5000K	4"	75W	Y	Y
RDL6-ADJ-15W-CS	76868	032886193446	1,250	15W	120V	2700K/3000K/3500K/4000K/5000K	6"	85W	Y	Y

ACCESSORIES (SOLD SEPARATELY)

MODEL #	ORDER CODE	UPC	DESCRIPTION
RDL4-FRAMEKIT	76869	032886193453	4" Frame-In Kit
RDL6-FRAMEKIT	76870	032886193460	6" Frame-In Kit
DLD-UNV-FRAMEKIT	73642	032886304231	Universal Frame Kit for 3", 4" and 6" fixtures
RDL/CBL/5CTS/6FT46	71090	751338038684	6' Low Voltage Extension Cable for use with 3", 4" and 6" fixtures
RDL/CBL/5CTS/6FT97	70880	751338035065	6' Low Voltage Extension Cable for use with 8" fixtures

*Excluded from ordering guide. Please reach out to lighting@southwire.com for details.

NOTES

Dimming- This product is designed to be compatible with most leading-edge type incandescent and LED style dimmers. (Dimming range 100% down to 5%). Product performance may vary depending on dimmer manufacturer and circuit loading.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Specifications are subject to change without prior notice. Replacement wattage shown depends on application and fixture.

BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612 Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.

Job Name/Title:_____ Model #:_____ Fixture Type:_____

TOPAZ®

LED SLIM FIT RECESSED DOWNLIGHTS

CCT SELECTABLE

ORDERING GUIDE

Example: **RDL6-10W-CS**

PRODUCT	SIZE	SHAPE	WATTAGE	CCT
RDL = RECESSED DOWNLIGHT LED	3 = 3-INCH 4 = 4-INCH 6 = 6-INCH 8 = 8-INCH	BLANK = ROUND SQ = SQUARE ADJ = ADJUSTABLE GIMBAL	7W = 7 WATTS 8W = 8 WATTS 10W = 10 WATTS 12W = 12 WATTS	CS = COLOR SELECT (5CCT)

ENERGY SAVINGS *Based on 12 hours/day and $0.11/kWh*

MODEL #	LED WATTAGE	INCANDESCENT REPLACEMENT WATTAGE	WATTS SAVED	YEARLY SAVINGS	5 YEAR SAVINGS
ROUND					
RDL3-7W-CS	7W	50W R20	43	$21	$104
RDL4-8W-CS	7.5W	50W R20	42.5	$20	$102
RDL6-10W-CS	9.5W	65W BR30	55.5	$27	$134
RDL6-12W-CS	12W	75W BR40	63	$30	$152
SQUARE					
RDL4-SQ-7W-CS	7W	50W R20	43	$21	$104
RDL6-SQ-9W-CS	9W	65W BR30	56	$27	$135
RDL6-SQ-12W-CS	12W	75W BR40	63	$30	$152
ADJUSTABLE					
RDL4-ADJ-7W-CS	7W	50W R20	43	$21	$104
RDL4-ADJ-10W-CS	9.5W	65W BR30	55.5	$27	$134
RDL4-ADJ-12W-CS	12W	75W BR40	63	$30	$152
RDL6-ADJ-15W-CS	15W	85W BR40	70	$34	$169

BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies.
All sizes and specifications are subject to change without notice.

Job Name/Title:_____ Model #:_____ Fixture Type:_____

TOPAZ®

LED SLIM FIT RECESSED DOWNLIGHTS

CCT SELECTABLE

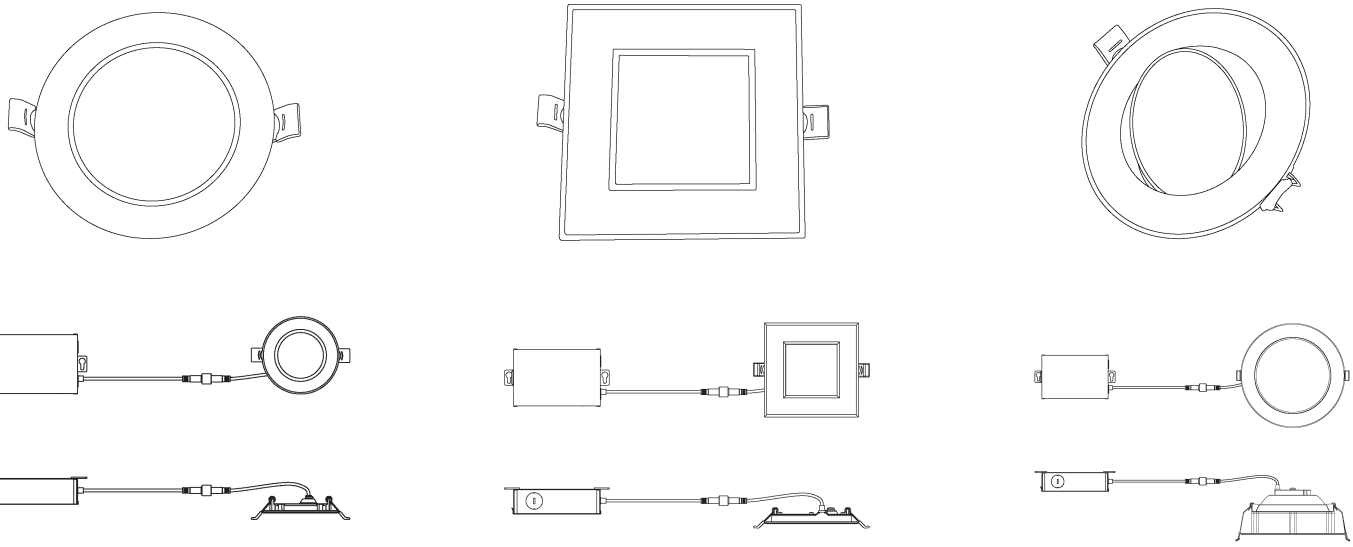

DIMENSIONS / WEIGHT

MODEL #	LENGTH (IN)	WIDTH (IN)	HEIGHT (IN)	WEIGHT (LBS)	PALLET QUANTITY (PCS)* 48" X 40" X 60"
ROUND					
RDL3-7W-CS	3.858	3.858	0.709	0.717	504
RDL4-8W-CS	4.882	4.882	0.728	0.827	504
RDL6-10W-CS	7.087	7.087	0.728	1.135	360
RDL6-12W-CS	7.087	7.087	0.728	1.135	360
RDL/8RND/18/5CTS	8.66"	8.66"	.66"	.92LBS	240
SQUARE					
RDL4-SQ-7W-CS	4.882	4.882	0.728	0.937	504
RDL6-SQ-9W-CS	7.087	7.087	0.728	1.268	360
RDL6-SQ-12W-CS	7.087	7.087	0.728	1.268	360
ADJUSTABLE					
RDL4-ADJ-7W-CS	4.921	4.921	1.969	1.080	384
RDL4-ADJ-10W-CS	4.921	4.921	1.969	1.080	384
RDL4-ADJ-12W-CS	4.921	4.921	1.969	1.080	384
RDL6-ADJ-15W-CS	7.087	7.087	3.031	1.962	144

*Pallet quantities may vary

BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612 Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.