



5" New Construction Line Voltage Cans and Trims

FEATURES

- Use with 75W Incand or LED Equiv and Trim (Sold Separately) or with Retrofit LED Downlight with E26 Adaptor
- Plaster frame: Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.
- Thermal protector: Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation
- UL Listed for damp location
- UL Listed for feed through wiring
- Certified under ASTM-E283 for airtight construction

INSTALLATION

- Bar hanger: Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame
- Junction box: Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief





IC Airtight

Item #: RH5/N/IC/AT

Order Code: T77604

DIMENSIONS

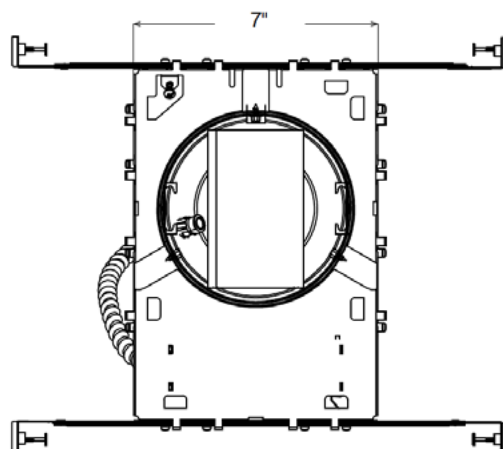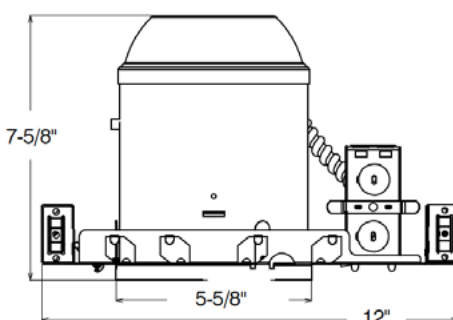

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**




5" LINE VOLTAGE TRIM OPTIONS




RT501WH

White Shallow Baffle Trim
Uses BR30, PAR30 Lamps
Order Code: T77601

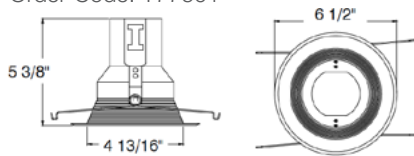


RT502WH

White Step Baffle with White Ring
Uses BR30, PAR30 Lamps
Order Code: T79164

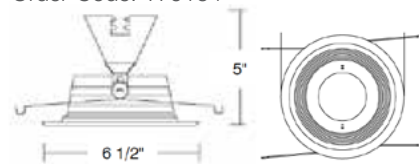

RT509WH/FL

Fresnal Shower Trim with White Ring
Uses A19, 50W PAR20 Lamps
Order Code: T77602

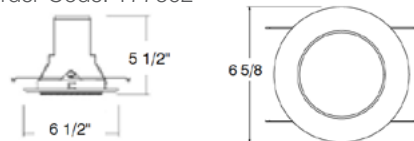

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**