




6" New Construction Line Voltage Sloped Cans and Trims

FEATURES

- Use with 75W Incand or LED Equiv and Trim (Sold Separately) or with Retrofit LED Downlight with E26 Adaptor
- Housing: Designed for use in ceiling with slopes from 2/12 to 6/12
- Socket: The socket aiming mechanism allows the lamp to be aimed straight down regardless of ceiling pitch
- Thermal protector: Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation
- UL Listed for damp location
- UL Listed for feed through wiring
- Certified under ASTM-E283 for airtight construction

INSTALLATION

- Bar hanger: Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame
- Junction box: Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief

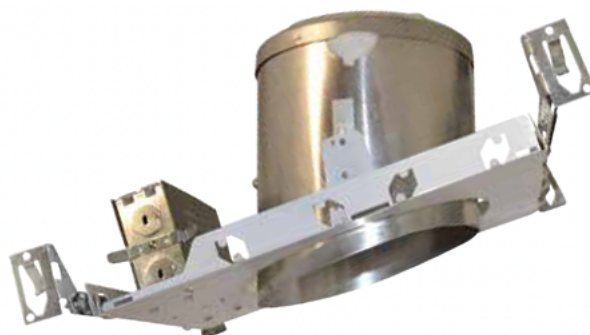


IC Airtight

Item #: RH6/NSL/IC/AT

Order Code: T78515

DIMENSIONS

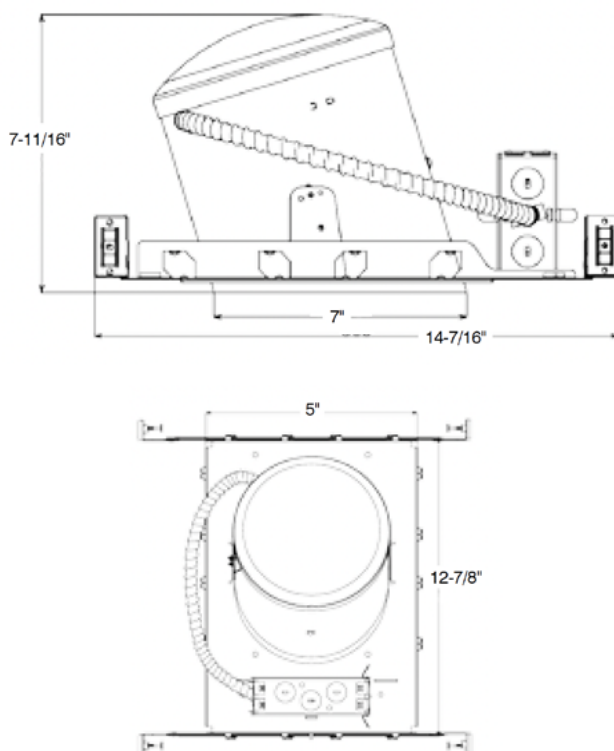

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**



6" LINE VOLTAGE TRIM OPTIONS





RT602WH/SC

White Baffle with White Ring

Uses BR40, PAR38 Lamps

Order Code: T78154



**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.