



LED Recessed Downlights

DESIGNER - GIMBAL TRIM

Superior Color Rendering

Topaz delivers with our designer series, easy-to-install, 90 CRI recessed downlights. Perfect for retrofit or new construction applications, these gimbal downlights boast exceptional lumen per watt efficacy and are available in 4" and 6" options. Our versatile 6" model can also be used in 5" recessed housing applications. Dimmable down to 5% of maximum lumen output, our downlights work seamlessly with most leading-edge dimmer technology.



FEATURES

- ENERGY STAR® Certified
- 4000K models support California Title 20 and 24, part 6 requirements for high efficacy LED light sources
- CRI of 90 provides exceptional color rendering
- For use in insulated or non-insulated ceilings
- Airtight certified per ASTM E283
- Quick connects for easy installation
- 50,000 hour life (L70)
- 4" replaces 50W Halogen; 6" replaces 65W Halogen
- Dimmable to 5% on most LED dimmers¹
- Light can be rotated 22° vertically and 355° horizontally

SUGGESTED APPLICATIONS

- Retrofit and new construction
- Residential and multi-family
- Hospitality
- Office lighting



E467698

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.

GENERAL SPECIFICATIONS

Input Voltage: 120V, 50/60Hz

Functional Life (L70): 50,000 Hours

CRI: 90

Base: E26



Ambient Operating Temp: -4°F to 113°F

Finish: White

Dimmable: to 5%

Location Rating: Damp

Power Factor: >0.9

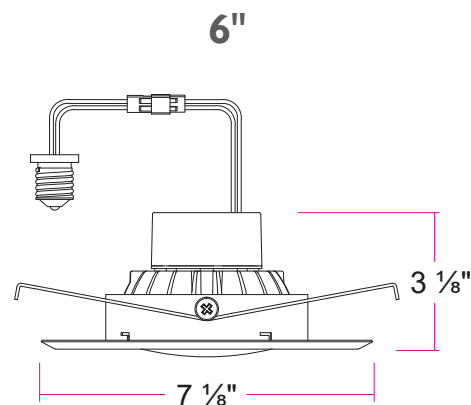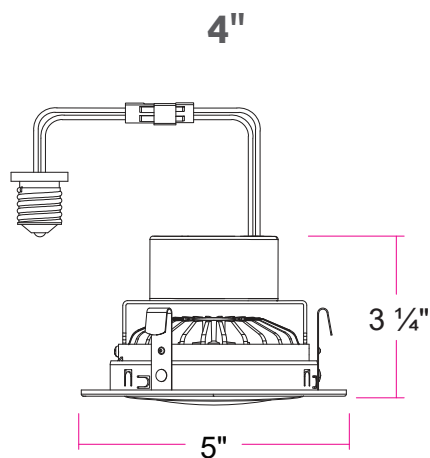

SPECIFICATIONS / ORDER INFO

Catalog Number	Order Code	UPC	Size	Wattage	Input Current	CCT	Lumens	LPW	ENERGY STAR®	Halogen Replacement	PK QTY	Unit Weight
RTL/437WH/90/D-28	79707 [†]	751338093782	4"	8W	0.07	3000K	620	78	Y	50W	1	0.7 Lbs.
RTL/447WH/90/D-28	79709	751338093799	4"	8W	0.07	4000K	690	86	Y	50W	1	0.7 Lbs.
RTL/637WH/90/D-28	79711 [†]	751338093805	6"	12W	0.11	3000K	1,025	85	Y	65W	1	0.9 Lbs.
RTL/647WH/90/D-28	79713	751338093812	6"	12W	0.11	4000K	1,100	92	Y	65W	1	0.9 Lbs.

[†] Not for sale in California.

NOMENCLATURE

Example: RTL/437WH/90/D-28


RTL	4 6	X	3	WH	90	D
LED Recessed Trim	Size (in)	CCT	Style	White	90 CRI	Dimmable
		↓ 2 (Soft White) 3 (Warm White) 4 (Cool White) 5 (Daylight)	↓ 0 (Smooth) 3 (Baffle) 7 (Gimbal) SQ (Square)			

NOTES:

[†]Dimming - This unit is designed to be compatible with most leading edge dimmers. (Dimming range 100% - 5%) Fixture performance may vary depending on dimmer manufacturer and circuit loading. Avoid mixing load types on the same circuit: Do not dim LED while also dimming CFL or incandescent loads.



4"

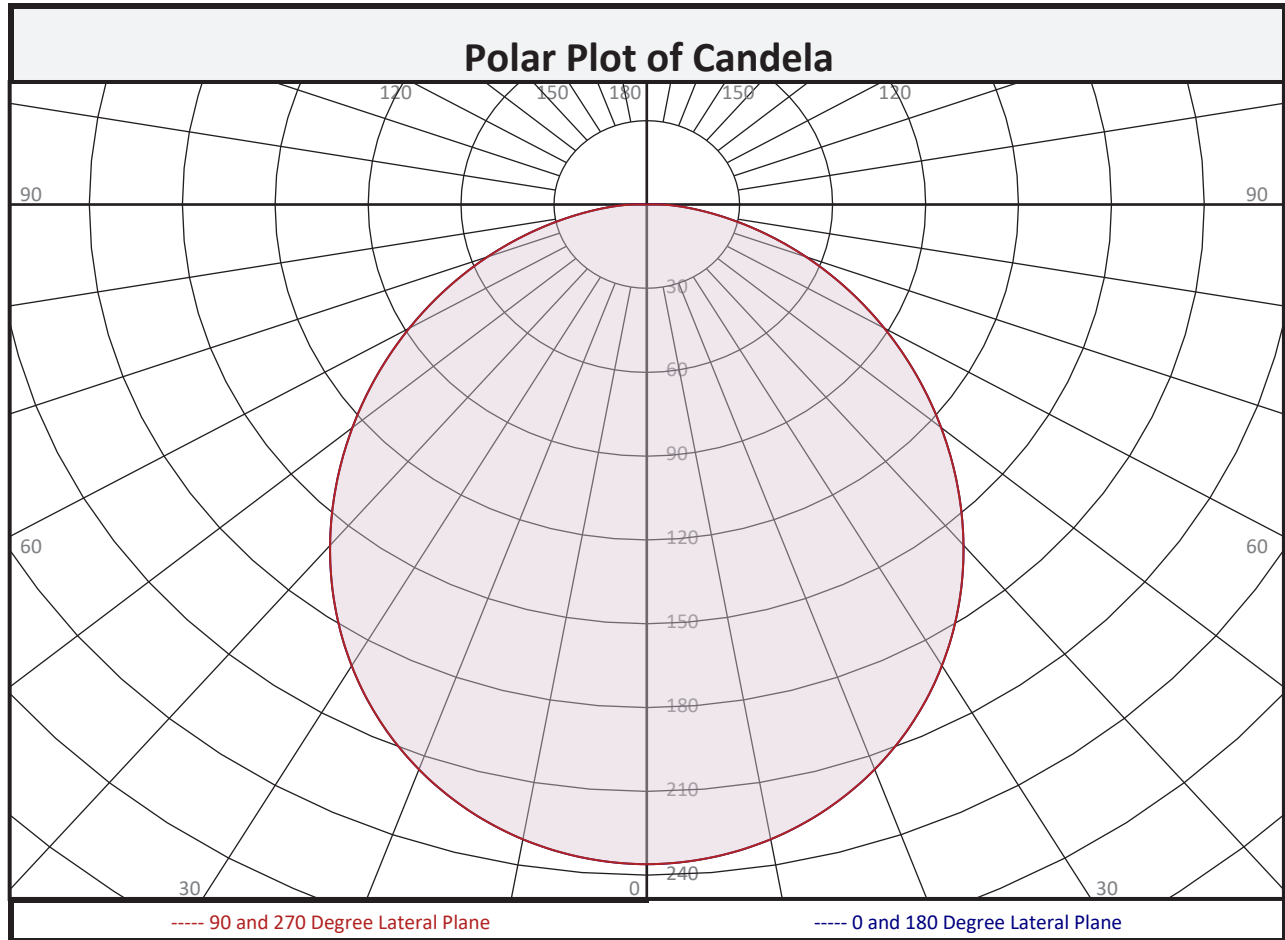

Zonal Flux Summary										
Zone (Deg Vert)	Flux (Lumens)	Percent of Total		Zone (Deg Vert)	Flux (Lumens)	Percent of Total		Zone (Deg Vert)	Flux (Lumens)	Percent of Total
0-10	22.3	3.6%		90-100	0.7	0.1%		0-20	85.4	13.8%
10-20	63.2	10.2%		100-110	0.0	0.0%		0-30	179.3	28.9%
20-30	93.8	15.1%		110-120	0.0	0.0%		0-40	289.0	46.5%
30-40	109.7	17.7%		120-130	0.0	0.0%		0-60	493.3	79.4%
40-50	109.3	17.6%		130-140	0.0	0.0%		0-80	605.3	97.5%
50-60	95.0	15.3%		140-150	0.0	0.0%		10-90	597.9	96.3%
60-70	70.7	11.4%		150-160	0.0	0.0%		20-50	312.9	50.4%
70-80	41.3	6.7%		160-170	0.0	0.0%		40-90	331.2	53.3%
80-90	14.9	2.4%		170-180	0.0	0.0%		60-90	126.9	20.4%
0-90	620.2	99.9%		90-180	0.7	0.1%		0-180	620.9	100.0%

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**


4"

Circle of Light Plot			
Height(ft)	Illuminance at Nadir (fc)	Ground-level distance to half-of-nadir illuminance (ft)	
		0-180 deg	90-270 deg
6.0	6.6	7.22	7.22
8.0	3.7	9.63	9.63
10.0	2.4	12.03	12.03
12.0	1.6	14.44	14.44
14.0	1.2	16.84	16.84
16.0	0.9	19.25	19.25

Average Luminance (cd/m ²)			
	0 deg Plane	45 deg Plane	90 deg Plane
0	61599	61599	61599
45	52321	52321	52321
55	48318	48318	48318
65	44047	44047	44047
75	39183	39183	39183
85	39506	39506	39506

Spacing Criterion	
Spacing Criterion:	1.2

6"

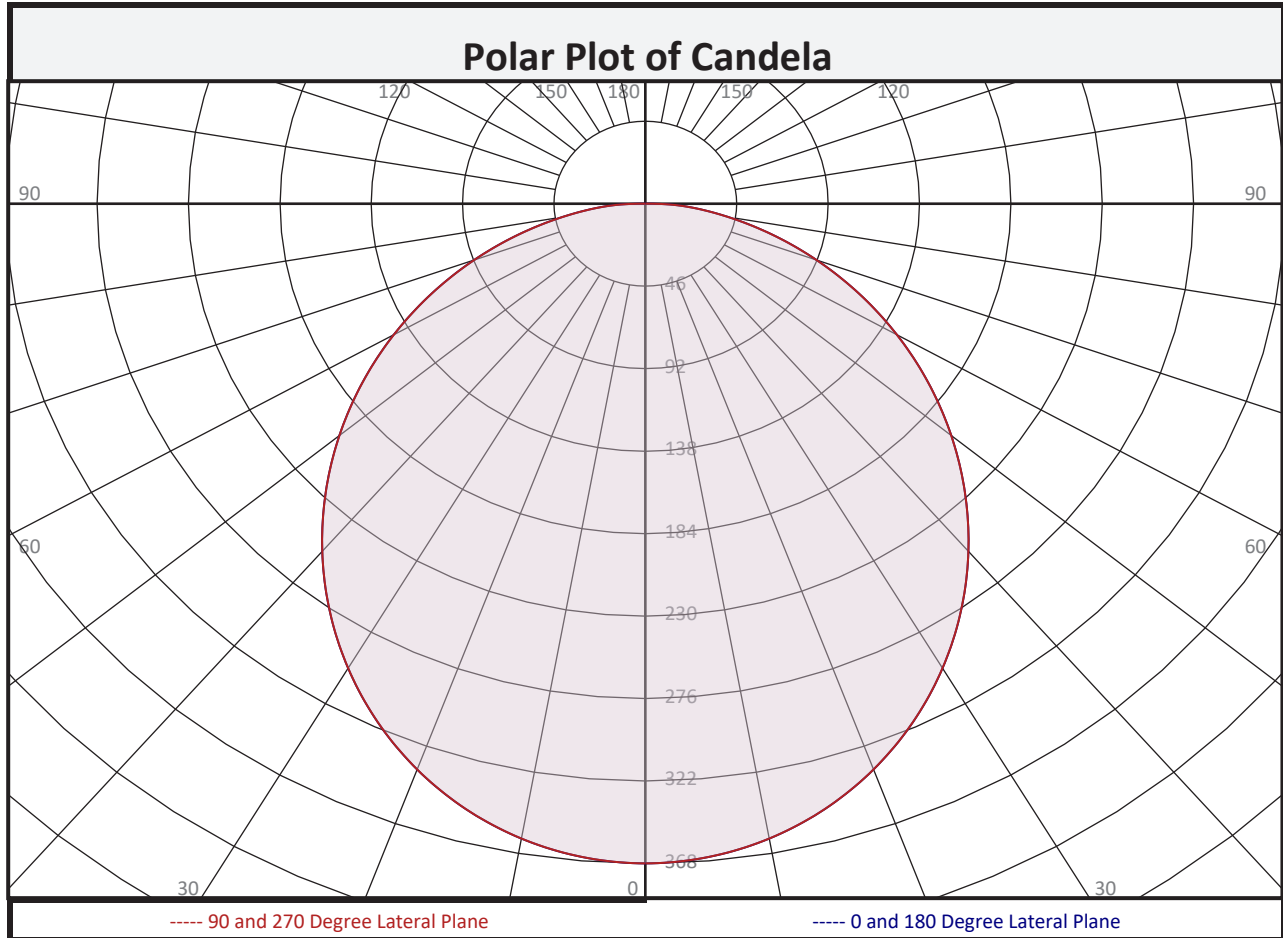

Zonal Flux Summary										
Zone (Deg Vert)	Flux (Lumens)	Percent of Total		Zone (Deg Vert)	Flux (Lumens)	Percent of Total		Zone (Deg Vert)	Flux (Lumens)	Percent of Total
0-10	34.7	3.5%		90-100	0.3	0.0%		0-20	133.3	13.4%
10-20	98.5	9.9%		100-110	0.0	0.0%		0-30	280.2	28.1%
20-30	146.9	14.7%		110-120	0.0	0.0%		0-40	453.4	45.5%
30-40	173.3	17.4%		120-130	0.0	0.0%		0-60	784.3	78.7%
40-50	175.5	17.6%		130-140	0.0	0.0%		0-80	971.5	97.5%
50-60	155.4	15.6%		140-150	0.0	0.0%		10-90	961.7	96.5%
60-70	117.6	11.8%		150-160	0.0	0.0%		20-50	495.6	49.7%
70-80	69.6	7.0%		160-170	0.0	0.0%		40-90	543.0	54.5%
80-90	24.9	2.5%		170-180	0.0	0.0%		60-90	212.1	21.3%
0-90	996.4	100.0%		90-180	0.3	0.0%		0-180	996.7	100.0%

6"

Circle of Light Plot			
Height(ft)	Illuminance at Nadir (fc)	Ground-level distance to half-of-nadir illuminance (ft)	
		0-180 deg	90-270 deg
6.0	10.2	7.27	7.27
8.0	5.8	9.69	9.69
10.0	3.7	12.12	12.12
12.0	2.6	14.54	14.54
14.0	1.9	16.96	16.96
16.0	1.4	19.38	19.38

Average Luminance (cd/m ²)			
	0 deg Plane	45 deg Plane	90 deg Plane
0	74372	74372	74372
45	65027	65027	65027
55	61237	61237	61237
65	56771	56771	56771
75	51250	51250	51250
85	52777	52777	52777

Spacing Criterion	
Spacing Criterion:	1.2