



LED GOOSENECK LIGHT

POWER & CCT SELECTABLE

SUGGESTED APPLICATIONS

- Hotels
- Restaurants
- Coffee shops
- Convenience stores
- Retail spaces

FEATURES

- All-in-one Power & CCT Selectable with Dusk to Dawn on/off control
- Die-cast aluminum housing with UV resistant polycarbonate lens
- Pre-wired gooseneck arm for fast assembly
- Removable reflector (straight reflector can be replaced with angled dome reflector)
- Available in black and bronze finish
- 270° Vertical rotation



GNL-25PCS-BK
(shown with pre-installed straight reflector)



GNL-25PCS-BZ
(shown with angled dome reflector accessory)

INPUT VOLTAGE, FREQUENCY:
120-277V AND 50/60Hz

DIMMING: DOWN TO 0%, 0-10V

CRI: >80

LIFETIME (L70):
UP TO 54,000 HOURS

BEAM ANGLE: 120°

IK (IMPACT RATING): IK04

POWER FACTOR:
>0.9 THD %: <20%

SURGE PROTECTION
RATING: 4kV


MOUNTING HEIGHT: 15 FT

MOUNTING OPTIONS:
WALL MOUNT

POWER CORD / LEADS INFO:
AWM >5.9 IN



**POWER
SELECT**



BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.



LED GOOSENECK LIGHT

POWER & CCT SELECTABLE

ITEM SPECIFICATIONS | ORDER INFO

MODEL #	UPC	INPUT VOLTAGE MAX. INPUT CURRENT	POWER SELECTABLE WATTAGE	LUMENS @ 2700K	LUMENS @ 3000K	LUMENS @ 3500K	LUMENS @ 4000K	LUMENS @ 5000K	LPW @ 4000K
GNL-25PCS-BK	032886793523	120-277V,0.35A	15W	2,002	2,055	2,154	2,192	2,184	135
			20W	2,557	2,645	2,819	2,798	2,788	138
			25W	3,003	3,069	3,251	3,300	3,294	142
GNL-25PCS-BZ	032886793530	120-277V,0.35A	15W	2,002	2,055	2,154	2,192	2,184	135
			20W	2,557	2,645	2,819	2,798	2,788	138
			25W	3,003	3,069	3,251	3,300	3,294	142

25W/4000K/PHOTOCELL OFF

ORDERING GUIDE

Example: **GNL-25PCS-BK**


PRODUCT	POWER SELECTABLE	CCT SELECTABLE	FINISH COLOR
GNL= GOOSENECK LIGHT	25P=15W/20W/25W	CS=2700K/3000K/3500K/4000K/5000K	BL=BLACK FINISH BZ=BRONZE

ACCESSORIES

MODEL #	UPC	DESCRIPTION
GNL-AD-BK	032886794339	ANGLED DOME REFLECTOR IN BLACK
GNL-AD-BZ	032886794346	ANGLED DOME REFLECTOR IN BRONZE

DIMENSIONS | WEIGHT

MODEL #	A (IN)	B (IN)	C (IN)	WEIGHT (LBS.)	PALLET QUANTITY (PCS)* 48" x 40" x 60"
GNL-25PCS-BK	13.89	20.67	11.85	3.24	54
GNL-25PCS-BZ	13.89	20.67	11.85	3.24	54
GNL-AD-BK	5	5	10	0.48	360
GNL-AD-BZ	5	5	10	0.48	360

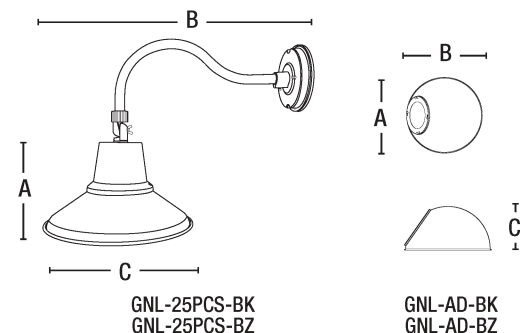

NOTES

DLC Primary Use Designation: Outdoor Full-Cutoff Wall-Mounted Area Luminaires

Dimming with standard 0-10V control system or wall dimmers. Dimming complies with IEC60929 Annex E. Fixture may not be compatible with all dimmers. Dimming performance may vary based on selected dimmer.

