IG230ELSX

- Two Lamp
- Multi-Watt
- Small Case Size
- Lightweight
- Versatile
- Energy Saving

Features & Benefits

- Wide lamp versatility, suitable for two F25T8, F25T12, F30T8, F30T12, *F32T8, *F34T12, *F40T8, *F40T10, or *F40T12 lamps
- Class A Sound Rating
- End of Lamp Life Protection
- More efficient compared to standard magnetic ballasts
- Lead wires do not interfere with mounting holes
- Contains No PCBs
- Eliminates strobing
- Thermal potting
- Metal enclosure
- Rapid Start

c UL us

RoHS compliant

SPECIFICATIONS

- Operating Voltage: 120 VAC ± 10%
- Frequency: 50/60Hz
- Protection: Class P Inherent Thermal Protection
- Regulatory Approvals: UL, CUL Listed
- Over Current: Fuse
- Min. Starting Temp: 0˚F (-17.78˚C)
  * 32˚F Min. Operating Temp
- Max. Case Temp: 158˚F (75˚C)
- FCC, 47 CFR, Part 18 Consumer Limits
- Type 1 Outdoor, Normal Power Factor

DIMENSIONS

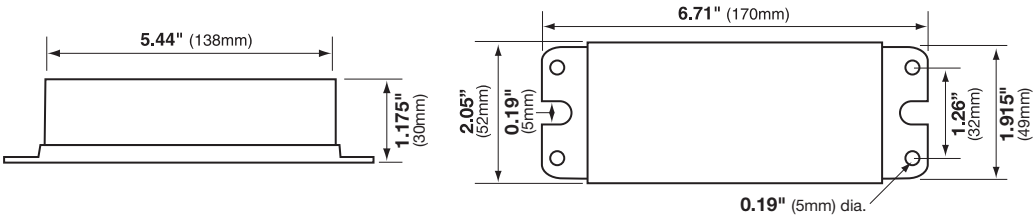

WIRING DIAGRAM



Weight: 13 oz. *Case Quantity:* 40pcs *Case Weight:* 35 lbs *Standard Lead Length:* black/white-24" blue/red-26" yellow-44"

Line Voltage	Lamp Type	Line Current	Input Power	Power Factor	Crest Factor	Ballast Factor	THD Percent	Min Start Temp
120	F25T8	0.70	50.6	0.507	1.39	1.0	119.2	0˚F
120	F25T12	0.58	36.8	0.53	1.50	0.74	119.5	0˚F
120	F30T8	0.70	46.6	0.55	1.50	0.78	119.1	0˚F
120	F30T12	0.63	41.4	0.54	1.40	0.70	119.7	0˚F
120	F32T8	0.80	61.5	0.53	1.40	0.90	117.3	32˚F
120	F34T12	0.66	43.6	0.55	1.40	0.66	119.3	32˚F