BACKLIT PANEL LIGHT

J-B2B4

FEATURES AND SPECIFICATIONS

Construction

- Integrative aluminum frame provides a durability structure
- 5 Wattage and 5 CCT selectable switches are integrated on the driver
- Minimize Stock, 1SKU can cover Max. of 25 Models

Electrical

- Input Voltage: 120-277Vac 50/60Hz
- 0-10V dimming
- THD ≤ 20%, PF ≥ 0.9

Applications

- **Offices , Retail, Schools, Restaurants,Residential**

Installation

- Fixture is suitable for recessed mounting with T-bar, and accessories for suspension and surface mounting are also available. Use in ambient temperatures ranging from -20°C to 45°C

Listing

- ETL listed, suitable for damp location.
- DesignLights Consortium ®(DLC)Premium.

Warranty

- 5-year limited warranty


Specs at a Glance	* Nominal Wattage (Switchable)		
Configuration	J-B2-S40-3565	J-B4-S50-1536	J-B4-S72-3565
CCT (K)	3500K/4000K/5000K/5700K/6500K (Switchable)		
Wattage (W)	15W/20W/25W/ 30W/40W Wattage Adjustable	15W/20W/30W/ 40W/50W Wattage Adjustable	30W/40W/50W/ 60W/72W Wattage Adjustable
Lumens (lm)	1,950-5,000 lm	1,950-6,500 lm	3,900-9,000 lm
Efficacy (LPW)	Up to 130		
CRI	≥80		
Input Voltage	120-277VAC, 50/60Hz, 0-10V Dimming		
Operating Temp	-20°C to 45°C		
Certifications	ETL DLC Premium		
Warranty	5 Years		

BACKLIT PANEL LIGHT

Ordering information

Model	Description
J-B2-S40-3565	2' x 2' Backlit Panel, Power Switchable 15W/20W/25W/30W/40W, Color Switchable 3500K/4000K/5000K/5700K/6500K
J-B4-S50-1536	2' x 4' Backlit Panel, Power Switchable 15W/20W/30W/40W/50W, Color Switchable 3500K/4000K/5000K/5700K/6500K
J-B4-S72-3565	2' x 4' Backlit Panel, Power Switchable 30W/40W/50W/60W/72W, Color Switchable 3500K/4000K/5000K/5700K/6500K

Detail

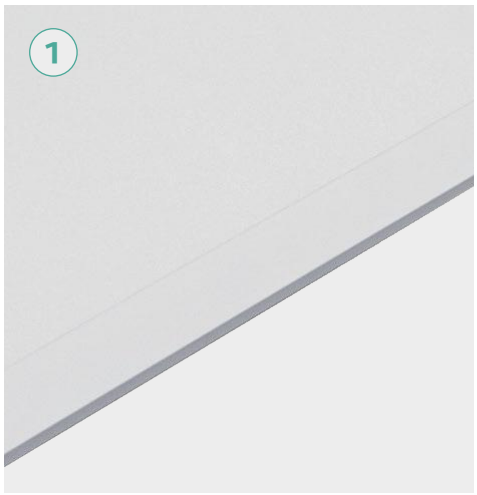






Multiple Emergency Solutions





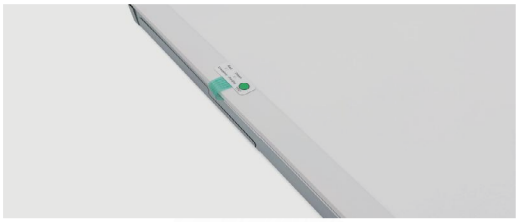

Emergency LED Driver (BILLDA)


Emergency LED Driver, 8W, 90-Min Battery




BACKLIT PANEL LIGHT

Flexible Installation Options


Cable Mount Kit
Optional Y cable mounting kit allows for suspended installations from any ceiling type. (2 pcs/kit)

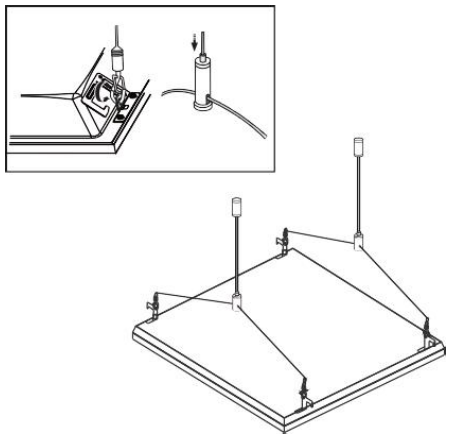

Surface Mount Kit
Optional surface mount kit allows for installation on plaster or other hard ceilings.

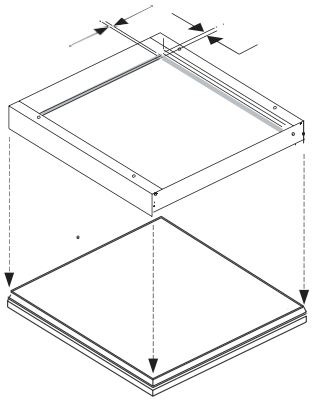

Installation Instruction

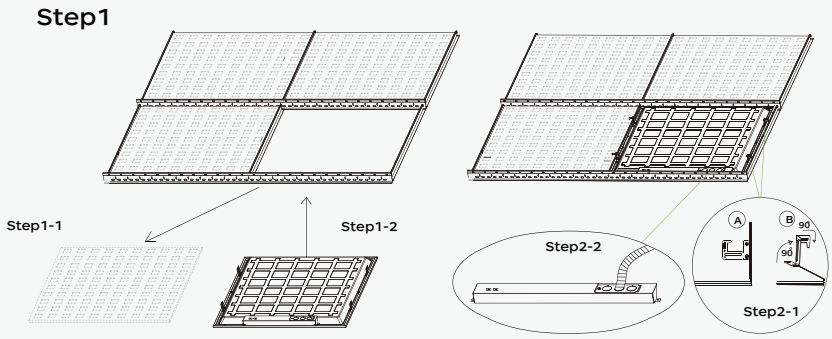

Packing Information

Size/ft	L /inch	W /inch	H /inch	QTY/ctn	G.W./lbs	CTN QTY/pallet
2x2'	25.2	25.2	6.1	4	16.23	144pcs
2x4'	49.4	25.2	6.1	4	39.30	72pcs