LED Full-Cutoff Wall Pack

J-WP11F

FEATURES AND SPECIFICATIONS



Construction

· Housing: Die-cast Aluminum
· Lens: Polycarbonate
· Easy to install and operate

Electrical

· High efficacy up to 160lm/W
· AC120-277V, 0-10V dimming
· Surge Protection: 6KV
· CCT & Wattage Selectable
· Light Distribution: Type III
· Waterproof: IP65 rated

Applications

· Factory, Warehouse, Walkways, Hallways, Outdoor Commercial, Outdoor Residential

Installation

· Microwave motion sensor and emergency driver available
· Automated Dusk to Dawn photocell functionality
· Wall Mount
· Five 1/2" knockouts: one on each side for convenient installation

Warranty

· 5 years warranty

Specs at a Glance	* Nominal Wattage (Switchable)
Configuration	J-WP11F-120W-S4W3C
Input Voltage	120-277V
Wattage (W)*	60W/90W/100W/120W Wattage Selectable
Lumens (lm)	max. 19200lm
Ecacy (LPW)	Up to 160lm/w
CCT (K)	3000K/4000K/5000K Tunable
CRI	>80
Operating Temp	-40°C to +50°C
Certification	UL DLC Premium
Warranty	5 year limited warranty

For ordering information, please contact sales@lightbulbsurplus.com

LED Full-Cutoff Wall Pack

Ordering information

Example: J-WP11F-120W-S4W3C


Brand	Wattage xxxW	Input Voltage	Lighting Distribution	Controller
JEE Lighting WP11F Series	60W 90W 100W 120W	L= AC120-277Vac H= AC277-480Vac	T3=Type III	"f" can be any alphanumeric for CCT, 3000K/4000K/5000K "g" can be "W" or blank for dimming module provided for not.

Detail




LED Full-Cutoff Wall Pack

Dimensions

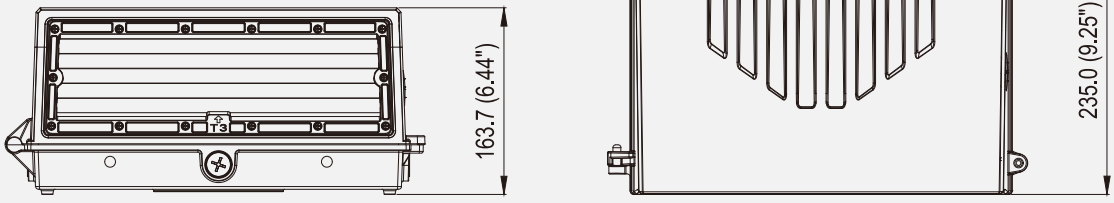

PHOTOMETRICS

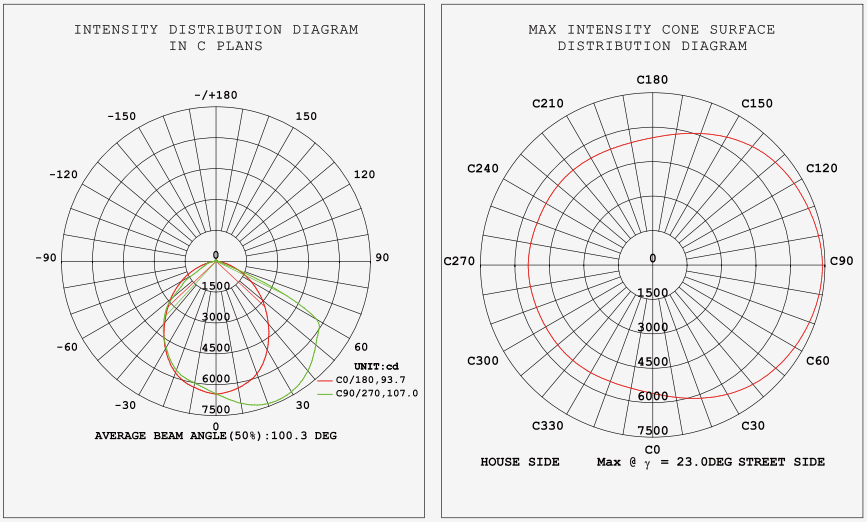

Packing/Weight

Part NO.	Outer Carton Size	Qty/Carton(pcs)	Net weight(lbs)	Gross weight(lbs)
J-WP11F-120W	16.73*11.42*8.54 inches	1	5.94 lbs	7.7 lbs