



# KTEB-126-1-TP

## COMPACT FLUORESCENT BALLAST



### DESCRIPTION

1 x 26W CFL | 120V | Normal Power Factor | Rapid Start | Small Plastic Case

<b>STARTING METHOD:</b> Rapid
<b>LAMP CONNECTION:</b> N/A
<b>INPUT VOLTAGE:</b> 120VAC $\pm$ 10%
<b>INPUT FREQUENCY:</b> 60 Hz
<b>BALLAST FACTOR (LIGHT OUTPUT):</b> Normal
<b>WARRANTY:</b> 3 Years



### PRODUCT FEATURES


- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Lamp End-of-Life Protected

### ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD
CFQ26W/G23q	1	120	24	0.40	0.54	<1.70	0.90	3.75	150
CFS28W/GR10q	1	120	26	0.40	0.58	<1.70	0.90	3.46	130
F32T8	1	120	32	0.45	0.59	<1.70	0.95	2.97	130
F25T8	1	120	25	0.37	0.57	<1.70	0.95	3.80	130
F19T5 (28" or 30")	1	120	18	0.29	0.52	<1.70	1.00	5.56	150
F18T5 (24" or 26")	1	120	17	0.27	0.52	<1.70	1.00	5.88	160
F17T8	1	120	18	0.27	0.54	<1.70	1.00	5.55	150
F15T8	1	120	16	0.26	0.52	<1.70	1.00	6.25	150
F13T8	1	120	16	0.26	0.51	<1.70	1.10	6.88	160
FC9T5	1	120	23	0.35	0.55	<1.70	1.05	4.57	140

### WIRING DIAGRAMS

C1-2

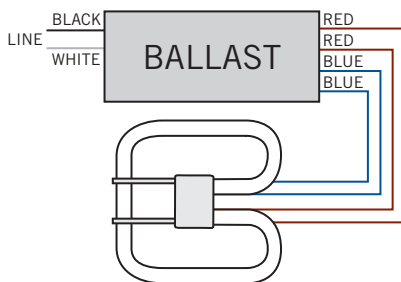




# KTEB-126-1-TP

## COMPACT FLUORESCENT BALLAST

### HOT SPOT LOCATION

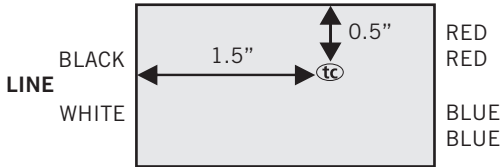

Actual tc point is noted on each ballast label.

### MECHANICAL SPECIFICATIONS

#### CASE DIMENSIONS

	<b>LENGTH</b>	3.45"
	<b>WIDTH</b>	1.81"
	<b>HEIGHT</b>	1.21"
	<b>MOUNTING</b>	2.88"
	<b>CASE STYLE</b>	S1

#### STANDARD LEAD LENGTHS\*

<b>BLACK</b>	12"
<b>WHITE</b>	12"
<b>BLUE</b>	6"
<b>RED</b>	6"

\*Consult Keystone for special lead length requirements.

### ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-126-1-TP-CP	Carton Pack	50	Quick Ship

### CATALOG NUMBER BREAKDOWN

# KTEB-126-1-TP-CP

