



KTEB-139HO-1-TP

T5HO ELECTRONIC BALLAST



DESCRIPTION

1 x F39T5HO | 120V | Normal Power Factor | Rapid Start

STARTING METHOD: Rapid
LAMP CONNECTION: N/A
INPUT VOLTAGE: 120VAC ±10%
INPUT FREQUENCY: 50/60 Hz
BALLAST FACTOR (LIGHT OUTPUT): Normal
WARRANTY: 3 Years




PRODUCT FEATURES

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Lamp End-of-Life Protected

ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Input Volts	Input Watts	Input Current	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD
F24T5 HO	1	120V	28W	0.41A	0.55	<1.70	1.00	3.57	135%
F39T5 HO	1	120V	35W	0.49A	0.57	<1.70	0.88	2.51	120%
FT36W/2G11	1	120V	33W	0.48A	0.50	<1.70	0.90	2.87	150%

WIRING DIAGRAMS

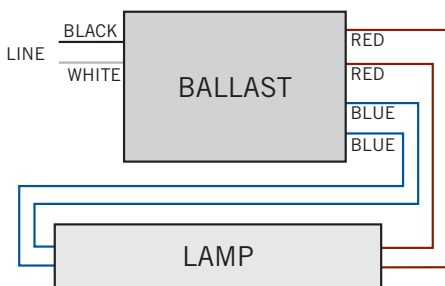



KTEB-139HO-1-TP

T5HO ELECTRONIC BALLAST

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS

	LENGTH	9.00"
	WIDTH	0.95"
	HEIGHT	0.95"
	MOUNTING	8.75"
	CASE STYLE	N1

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACKAGE QUANTITY	ITEM STATUS
KTEB-139HO-1-TP-CP	Carton Pack	50	Active

CATALOG NUMBER BREAKDOWN

KTEB-139HO-1-TP-CP

Keystone Technologies Electronic Ballast	1 Lamp	39 Watts	High Output	120V Input	Thermally Protected	Packaging Style
---	-----------	-------------	----------------	---------------	------------------------	--------------------