



KTEB-154HO-1-TP

T5HO ELECTRONIC BALLAST



DESCRIPTION

1 x F54T5HO | 120V | Normal Power Factor | Rapid Start

STARTING METHOD: Rapid
LAMP CONNECTION: N/A
INPUT VOLTAGE: 120VAC ±10%
INPUT FREQUENCY: 50/60 Hz
BALLAST FACTOR (LIGHT OUTPUT): Normal
WARRANTY: 3 Years




PRODUCT FEATURES

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Lamp End-of-Life Protected

ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Input Volts	Input Watts	Input Current	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD
F54T5 HO	1	120V	51W	0.75A	0.56	<1.70	0.95	1.86	140%

WIRING DIAGRAMS

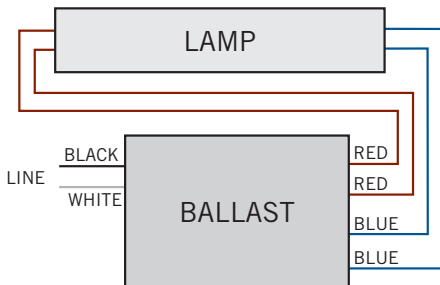



KTEB-154HO-1-TP

T5HO ELECTRONIC BALLAST

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS

	LENGTH	9.00"
	WIDTH	0.95"
	HEIGHT	0.95"
	MOUNTING	8.75"
	CASE STYLE	N1

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACKAGE QUANTITY	ITEM STATUS
KTEB-154HO-1-TP-CP	Carton Pack	TBD	Active

CATALOG NUMBER BREAKDOWN

KTEB-154HO-1-TP

