



# KTEB-275-1-TP-PIC-SL

T12 ELECTRONIC FLUORESCENT



## PRODUCT FEATURES



|                                  |                                   |                           |
|----------------------------------|-----------------------------------|---------------------------|
| <b>STARTING METHOD:</b> Instant  | <b>INPUT VOLTAGE:</b> 120VAC ±10% | <b>WARRANTY:</b> 3 Years  |
| <b>LAMP CONNECTION:</b> Parallel | <b>INPUT FREQUENCY:</b> 50/60 Hz  | <b>POWER FACTOR:</b> High |

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Transient Protection Meets ANSI/IEEE62.41 Cat. A

## ELECTRICAL SPECIFICATIONS

| LAMP TYPE     | NO. OF LAMPS | INPUT VOLTS | INPUT WATTS | INPUT CURRENT (AMPS) | POWER FACTOR | CREST FACTOR | BALLAST FACTOR | BALLAST EFFICACY FACTOR | MAX THD% | WIRING DIAGRAM |
|---------------|--------------|-------------|-------------|----------------------|--------------|--------------|----------------|-------------------------|----------|----------------|
| F96T12 75W    | 2            | 120         | 133.0       | 1.12                 | 0.99         | <1.70        | 0.88           | 0.66                    | 10       | F2-4           |
|               | 1            | 120         | 82.0        | 0.68                 | 0.99         | <1.70        | 1.05           | 1.28                    | 10       | F1-4           |
| F96T12/ES 60W | 2            | 120         | 117.0       | 0.98                 | 0.99         | <1.70        | 0.88           | 0.75                    | 10       | F2-4           |
|               | 1            | 120         | 72.0        | 0.60                 | 0.99         | <1.70        | 1.05           | 1.46                    | 10       | F1-4           |
| F72T12 57W    | 2            | 120         | 107.0       | 0.92                 | 0.99         | <1.70        | 0.90           | 0.84                    | 10       | F2-4           |
|               | 1            | 120         | 67.0        | 0.60                 | 0.99         | <1.70        | 1.05           | 1.57                    | 10       | F1-4           |
| F48T12 40W    | 2            | 120         | 76.0        | 0.68                 | 0.99         | <1.70        | 0.92           | 1.21                    | 10       | F2-4           |
| F48T12/ES 30W | 2            | 120         | 64.0        | 0.60                 | 0.99         | <1.70        | 0.92           | 1.44                    | 10       | F2-4           |

## WIRING DIAGRAMS

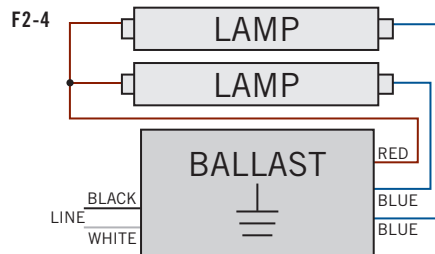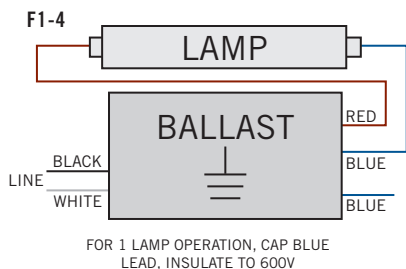




# KTEB-275-1-TP-PIC-SL

T12 ELECTRONIC FLUORESCENT

## CASE STYLE/DIMENSIONS

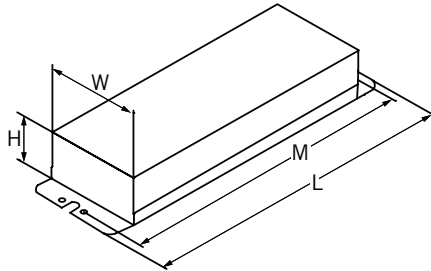

### CASE DIMENSIONS


|                       |
|-----------------------|
| LENGTH: 9.45"         |
| WIDTH: 1.80"          |
| HEIGHT: 1.37"         |
| MOUNTING: 8.90"       |
| UNIT WEIGHT: 1.65 lbs |

### STANDARD LEAD LENGTHS\*

|                       |
|-----------------------|
| BLACK: 25.00"         |
| WHITE: 25.00"         |
| BLUE: 58.00" X 58.00" |
| RED: 66.00"           |

\*Consult Keystone for special lead length requirements.

## HOT SPOT LOCATION

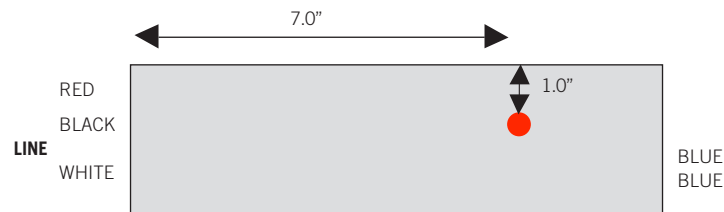

## ORDERING INFORMATION

| ORDER CODE              | PACKAGING STYLE | PACK QTY. | ITEM STATUS   |
|-------------------------|-----------------|-----------|---------------|
| KTEB-275-1-TP-PIC-SL-DP | Distributor     | 10        | Quick Ship    |
| KTEB-275-1-TP-PIC-SL-CP | Carton          | 10        | Active        |
| KTEB-275-1-TP-PIC-SL-BP | Bulk            | 1,008     | Special Order |

## CATALOG NUMBER BREAKDOWN

# KTEB-275-1-TP-PIC-SL

Keystone Technologies Electronic Ballast
2 Lamps
75 Watts
120V Input
Thermally Protected
Active Power Factor Correction
Slim Case Style