

# MH-250A-D-FCAN

## 250W F-CAN METAL HALIDE



**LAMP TYPE:** 250W Metal Halide (M58 or H37)    **INPUT VOLTAGE:** Dual Tap (120/277)    **CIRCUIT TYPE:** CWA


### PRODUCT FEATURES

- ANSI Designation: M58 or H37
- Line Voltage: 120/277
- Regulation: 5%
- Frequency: 60 Hz
- Recommended Fuse (A): 8/4
- Circuit Type: CWA
- Insulation Class: 105°C
- Capacitor: Integral
- Winding Materials: Cu/Cu
- Lamp Starter: N/A
- Agency Certification: UL, cUL Listed
- Maximum Distance to Lamp: 10 feet
- Warranty: 2 Years

### ELECTRICAL SPECIFICATIONS


LINE VOLTAGE	POWER FACTOR	LINE CURRENT			INPUT POWER	OPEN CIRCUIT VOLTAGE	MINIMUM START TEMP	UL TEMP CODE
		OPERATING	OPEN CIRCUIT	STARTING				
120V	High	2.69A	1.57A	2.18A	314W	285V	-30°C/-22°F	A
277V	High	1.16A	0.68A	0.94A	312W	283V	-30°C/-22°F	A

### PHYSICAL SPECIFICATIONS

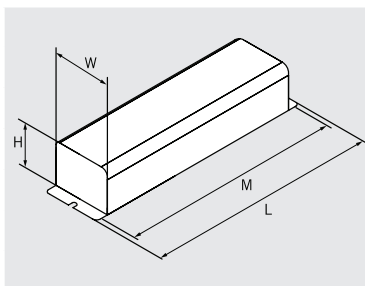

<b>LENGTH</b>	16.60"
<b>WIDTH</b>	3.23"
<b>HEIGHT</b>	2.75"
<b>MOUNTING</b>	16.10"
<b>NET WEIGHT</b>	19 lbs
<b>LEAD LENGTH</b>	12-14"
<b>CASE STYLE</b>	D13

### WIRING DIAGRAM

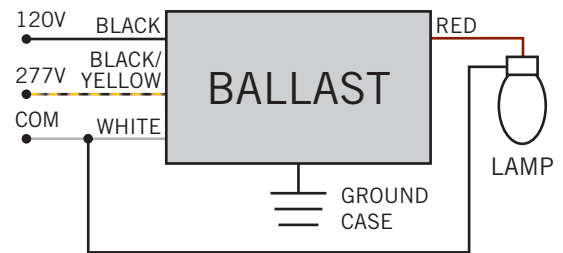

### ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
MH-250A-D-FCAN	Individually Packaged	1	Quick Ship

### CATALOG NUMBER BREAKDOWN

# MH-250A-D-FCAN

