

RWD-LED-17-150-8XX-P

ROUND WASHDOWN LED HIGH BAY FIXTURE



150W, 120–277V Input, 0–10V Dimming



5 YEAR
WARRANTY



PRODUCT FEATURES


- IP69K rated: Wet location for high pressure cleaning
- ETL Sanitation listed: NSF/ANSI standard 2 food equipment (splash zone and non-food zone)
- Powered by Keystone 0-10V dimming LED driver
- Ambient operating temperature: -40°C/-40°F to 40°C/104°F
- LED lifetime: L70 >100,000 hours @ 25°C/77°F fixture ambient
- Ring bolt mounting accessory included
- 0–10V dimming, 10% minimum
- THD: <20%
- 6' cord for input and dimming wires

PERFORMANCE SPECIFICATIONS


Catalog Number	Input Voltage	Wattage	Color Temperature	Lumen Output	CRI	Power Factor	Efficacy	Beam Angle
RWD-LED-17-150-840-P	120–277V	150W	4000K	19,500 lm	>82.0	>0.92	130 lm/W	90°
RWD-LED-17-150-850-P	120–277V	150W	5000K	19,800 lm	>82.0	>0.92	132 lm/W	90°

PHOTOMETRIC SPECIFICATIONS

ISOCANDELA PLOT

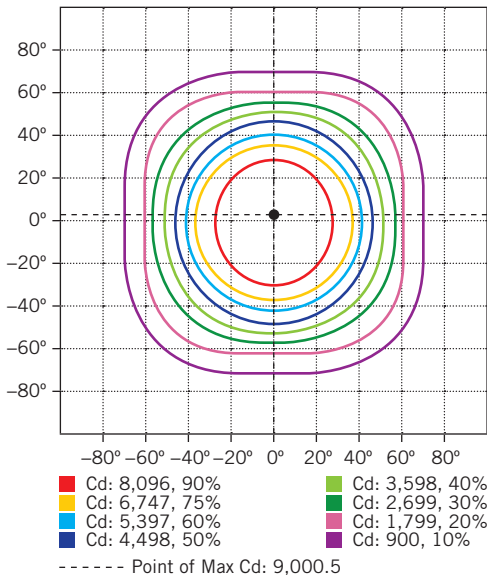

POLAR CANDELA DISTRIBUTION

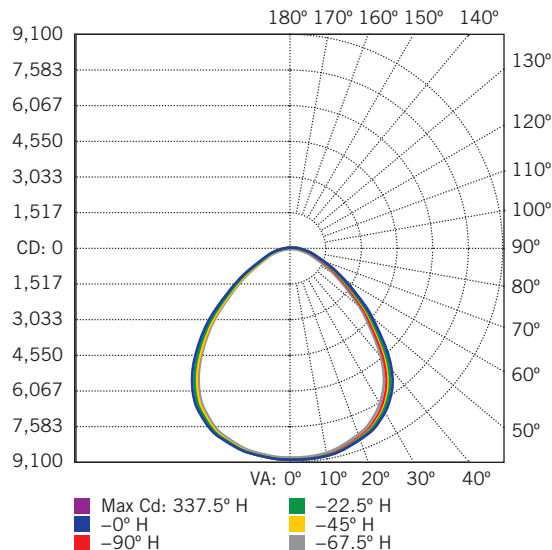

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0–30	7,205.4	36.6%
0–40	11,524.4	58.5%
0–60	17,564.2	89.2%
60–90	2,068.4	10.5%
70–100	642.1	3.3%
90–120	12.0	0.1%
0–90	19,632.5	99.7%
90–180	53.2	0.3%
0–180	19,685.8	100%

RWD-LED-17-150-8XX-P

ROUND WASHDOWN LED HIGH BAY FIXTURE

PHYSICAL SPECIFICATIONS

