

S-LED-4-44-8XX-P

4' LED STRIP FIXTURE



44W, 120-277V Input, 0-10V Dimming

PRODUCT FEATURES

- Powered by Keystone 0-10V dimming LED drivers
- Smooth diffused lens for an even appearance
- 0-10V dimming, 10% minimum
- Compatible with Keystone SmartSafe emergency LED drivers
- Compatible with Keystone 480-277V step down transformers
- Compatible with Keystone occupancy sensors
- Ambient operating temperature: -20°C/-4°F to 50°C/122°F
- UL Listed 1598: Suitable for dry and damp locations
- THD: <20%
- Power factor > 0.95
- L70 >50,000 hours



AVAILABLE MODIFICATIONS (WITH VOLUME ORDER)

- Lumen targets
- Frame colors


PERFORMANCE SPECIFICATIONS

Catalog Number	Color Temp	Nominal Length	Input Voltage	Wattage	CRI	Lumen Output	Efficacy
S-LED-4-44-835-P	3500K	4'	120-277V	44W	>82	5,632	128 lm/W
S-LED-4-44-840-P	4000K	4'	120-277V	44W	>82	5,720	130 lm/W
S-LED-4-44-850-P	5000K	4'	120-277V	44W	>82	5,764	131 lm/W

S-LED-4-44-8XX-P


4' LED STRIP FIXTURE

PHOTOMETRIC SPECIFICATIONS

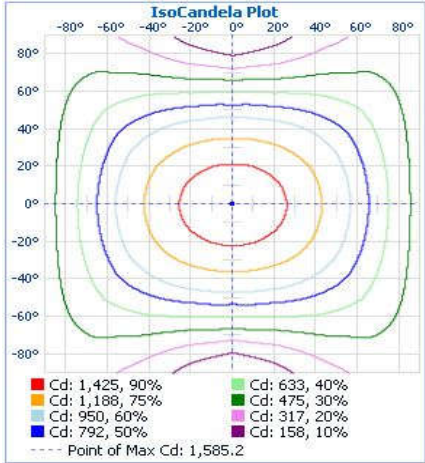

Zonal Lumen Summary		
Zone	Lumens	% Luminaire
0-30	1,225.1	22%
0-40	2,008.6	36%
0-60	3,606.8	64.6%
60-90	1,475.0	26.4%
70-100	1,036.0	18.6%
90-120	411.3	7.4%
0-90	5,081.8	91.1%
90-180	498.7	8.9%
0-180	5,580.5	100%

PHYSICAL SPECIFICATIONS

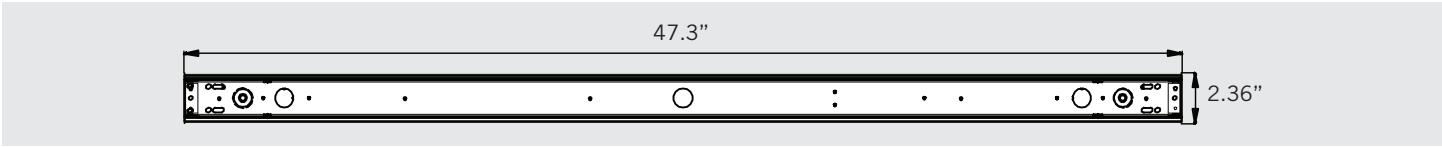

ORDERING INFORMATION

Catalog Number	Packaging Style	Quantity	Item Status
S-LED-4-44-835-P	Carton Pack	1	Active
S-LED-4-44-840-P	Carton Pack	1	Active
S-LED-4-44-850-P	Carton Pack	1	Active