

VT-LED-2A-19-8XX-P

2' VAPOR TIGHT FIXTURE



2' 19W, 120-277V Input, 0-10V Dimming

PRODUCT FEATURES

- Traditional design, narrow body, Vapor Tight fixture, suitable for rugged, demanding applications
- Powered by Keystone 0–10V dimming LED drivers
- IP66, suitable for wet location
- Smooth, diffused lens for even appearance
- Stainless steel lens clips
- 0–10V dimming, 10% minimum
- Impact Resistance Rating: IK10
- Ambient operating temperature: –20°C/–4°F to 50°C/122°F
- NEMA 4X rated, protected against corrosion
- UL Listed 1598
- THD: <20%
- PF: >0.95
- LED chip lifetime: L70>100,000 hours @ 25°C/77°F ambient fixture temperature
- Includes mounting hardware
- High quality, impact resistant Poly Carbonate lens
- ETL Sanitation Listed NSF/ANSI Standard 2 - Food Equipment, Splash Zone (Not for Direct Food Zone)



PERFORMANCE SPECIFICATIONS


Catalog Number	Color Temp	Nominal Length	Input Voltage	Wattage	CRI	Lumen Output	Efficacy
VT-LED-2A-19-840-P	4000K	2'	120-277V	19W	>82	2,430 lm	128 lm/W
VT-LED-2A-19-850-P	5000K	2'	120-277V	19W	>82	2,465 lm	130 lm/W

VT-LED-2A-19-8XX-P

2' VAPOR TIGHT FIXTURE

PHOTOMETRIC SPECIFICATIONS


LUMINOUS INTENSITY DISTRIBUTION

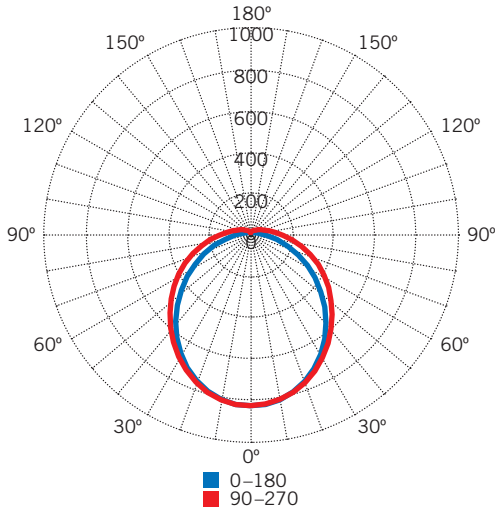

ZONAL LUMEN SUMMARY

Degree	Flux (Lumens)	% Luminaire
0~10°	78.3 lm	3.10%
0~20°	300.8 lm	11.92%
0~30°	633.1 lm	25.09%
0~40°	1,026.4 lm	40.68%
0~50°	1,429.2 lm	56.64%
0~60°	1,796.7 lm	71.21%
0~70°	2,094.0 lm	82.99%
0~80°	2,298.9 lm	91.11%
0~90°	2,413.3 lm	95.65%
0~100°	2,471.5 lm	97.95%
0~110°	2,500.7 lm	99.11%
0~120°	2,514.1 lm	99.64%
0~130°	2,519.0 lm	99.83%
0~140°	2,520.4 lm	99.89%
0~150°	2,521.5 lm	99.93%
0~160°	2,522.4 lm	99.97%
0~170°	2,523.0 lm	99.99%
0~180°	2,523.2 lm	100.00%

PHYSICAL SPECIFICATIONS



ORDERING INFORMATION

Catalog Number	Packaging Style	Quantity	Item Status
VT-LED-2A-19-840-P	Carton Pack	4	Active
VT-LED-2A-19-850-P	Carton Pack	4	Active