

# Linear T5HE/HO

# L48T5HO/8XX/24G-EB-AC

## Commercial Grade LED T5 Lamp

### Descriptions:

The RetroFlex (Type A) LED lamps provide hassle-free installation with simple lamp-for-lamp replacements for your linear fluorescent T5HE or T5HO retrofit needs. Fully certified to replace original fluorescent lamps, these lamps provide the perfect, hassle-free solution for whatever the project requires. When being used with an instant start, programmed start, or emergency backup ballast, no fixture re-wiring is needed.




### Features & Benefits:

- No rewiring needed
- Works with fluorescent electronic T5 ballast
- Long life
- High CRI
- Instant on, no delay
- Convenient and quick installation
- Utilizes existing T5 sockets
- Compatible with controls and sensors
- No Mercury, No UV
- Works in cold temperature applications
- Glass tube for superior optical performance
- Full Glass Design
- Super Wide View Angle, 240
- 5 Year Warranty

### Specifications:

Ordering Code	Length (in)	Lamp Wattage	System Wattage	CCT (K)	Initial Lumens	CRI	Beam Angle	Lamp Efficacy	System Efficacy	Life (hr)
L48T5HO/830/24G-EB-AC	48 in	24W	27W	3000K	3100	83	240	129	115	50000
L48T5HO/835/24G-EB-AC	48 in	24W	27W	3500K	3100	83	240	129	115	50000
L48T5HO/840/24G-EB-AC	48 in	24W	27W	4000K	3200	83	240	133	118	50000
L48T5HO/850/24G-EB-AC	48 in	24W	27W	5000K	3200	83	240	133	118	50000

Wiring Diagram:

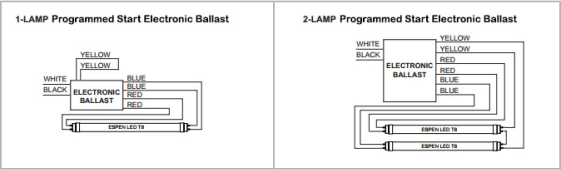

DLC Listing:

Ordering Code	DLC Product ID	DLC Product Model	DLC Version
L48T5HO/830/24G-EB-AC	PL961O49AQPP	L48T5HO/830/24G-EB-AC(-aa)	5
L48T5HO/835/24G-EB-AC	PLDZLUB4M03S	L48T5HO/835/24G-EB-AC(-aa)	5
L48T5HO/840/24G-EB-AC	PL73S2A4V9YD	L48T5HO/840/24G-EB-AC(-aa)	5
L48T5HO/850/24G-EB-AC	PLHC3F4TLDT0	L48T5HO/850/24G-EB-AC(-aa)	5

- Please refer to "Ballast Compatibility List" for compatible battery backup and/or emergency ballasts.
- Please refer to "Ballast Compatibility List" on Related Downloads.

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.