


# LINER HIGHBAY LIGHT



Contractor Essentials  
LIGHT MORE, PAY LESS  
BY LIGHT BULB SURPLUS

## LHB10<sup>®</sup>

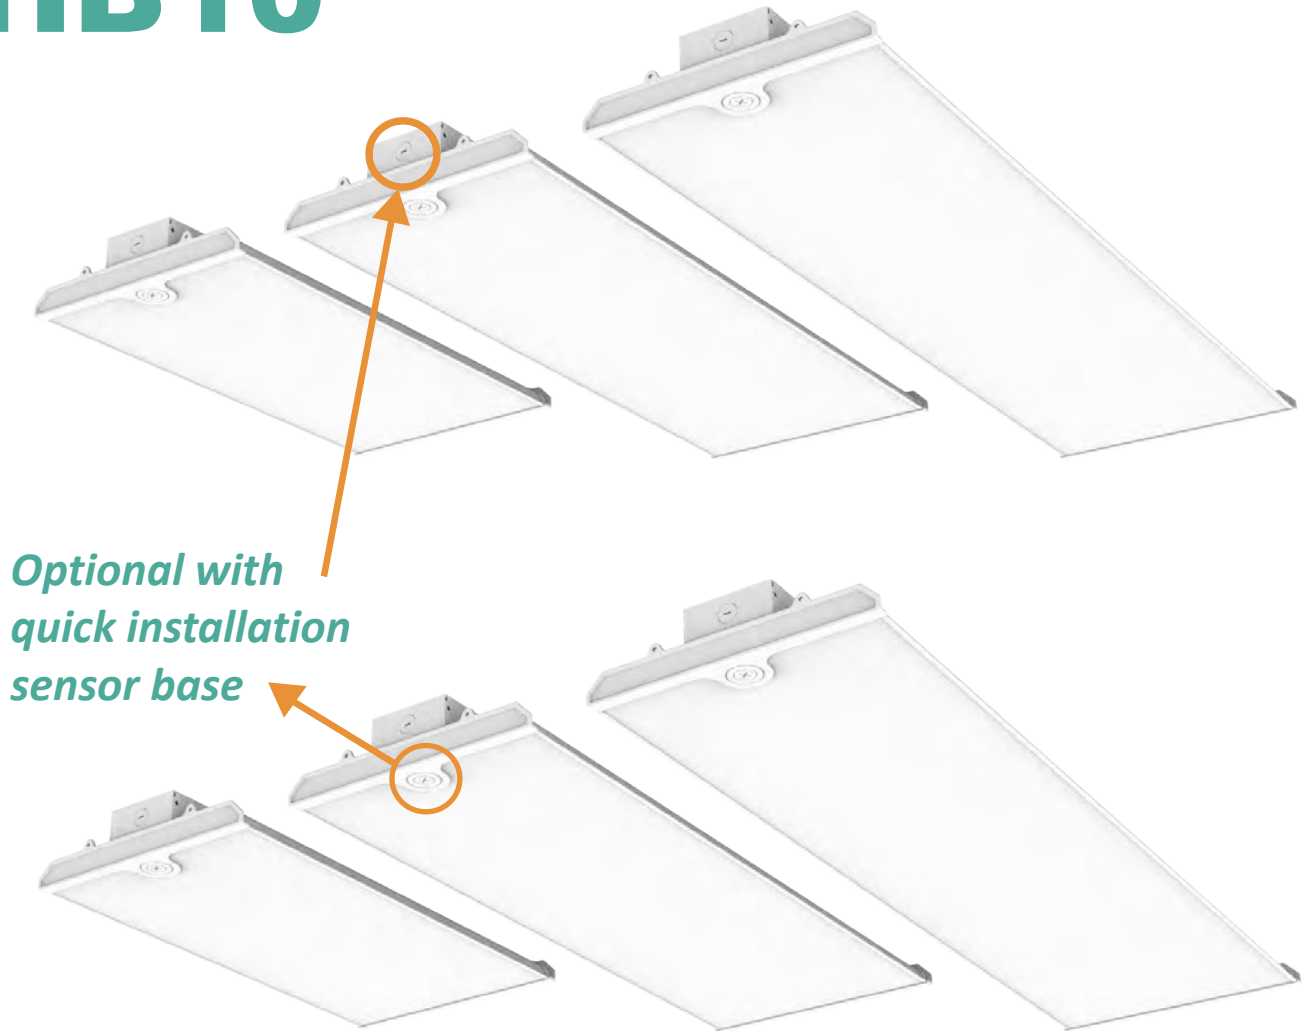

*Optional with  
quick installation  
sensor base*

- **Wattages:**  
2FT: 110W/130W/160W  
3FT: 175W/200W/225W  
4FT: 250W/275W/300W  
255W/300W/400W
- **DLC&ETL certification**
- **Application warehouse, supermarket, covered court, utility areas etc**
- **CCT switchable:**  
4000K/5000K/5700K
- **Input voltage:** AC120-277V
- **Lumen:** 160LM/W
- **PF>0.9, CRI>80**



# LINER HIGHBAY LIGHT

## DETAILS

### Features

Durable design - constructed of a robust durable housing.  
High quality drives make the product more stable and reliable.  
CCT and wattage switchable through dip-switches or controller.  
High-quality LEDs, provide bright and uniform lighting.  
Compatible with standard 0-10V dimmer.  
Working temperature: -4°F~113°F

### Installations

Suspend the fixture by using suspension chain.  
Pendant the fixture on steeve by junction box.

### Certifications

DLC premium.  
Comply with the requirements of the Standard(s) for Luminaires (CAN/CSA-C22.2 No. 250.0) and are identified with the ETL Listed Mark.

### Accessories


Emergency battery, motion sensor, surface mounted kits for option.

### Warranty

5 years Warranty

## SUITABLE APPLICATIONS

- Warehouses
- Distribution Centers
- Gymnasiums
- Manufacturing Plants
- Airports
- Indoor open spaces



## ORDER GUIDE

Model	Power	CCT	Efficacy	Lumen
LHB10-2FT -110/130/160W-4057K	110W/130W/160W (Switchable)	4000K/5000K/5700K	160LM/W	17600Lm-25600Lm
LHB10-3FT -175/200/225W-4057K	175W/200W/225W (Switchable)	4000K/5000K/5700K	160LM/W	28000Lm-36000Lm
LHB10-4FT -250/275/300W-4057K	250W/275W/300W (Switchable)	4000K/5000K/5700K	160LM/W	40000Lm-48000Lm
LHB10-4FT -255/300/400W-4057K	255W/300W/400W (Switchable)	4000K/5000K/5700K	160LM/W	40800Lm-64000Lm

# LINER HIGHBAY LIGHT




Contractor Essentials  
LIGHT MORE, PAY LESS  
BY LIGHT BULB SURPLUS


## INSTALLATIONS

- Chain Installation


1. Select the desired power and colour temperature on the dip switches.

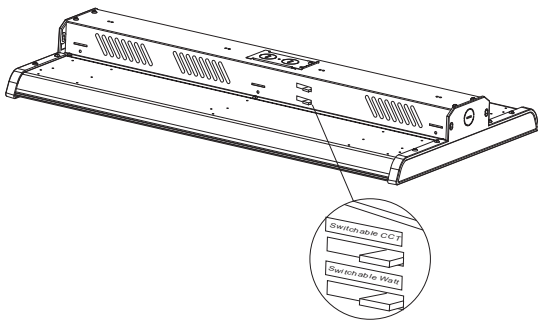


2. Hook the chain as below pic, and insert the hook into the slotted holes, as shown below.

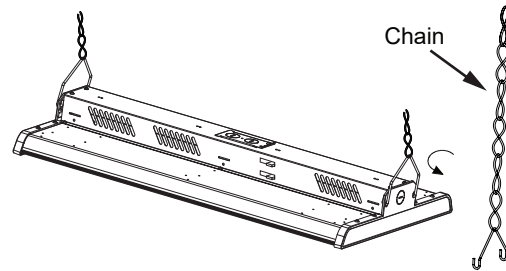


3. Hook up the chain on the ceiling anchor

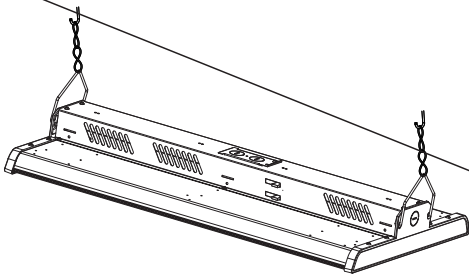


4. Turn off power, and make wiring connections with terminal cap.

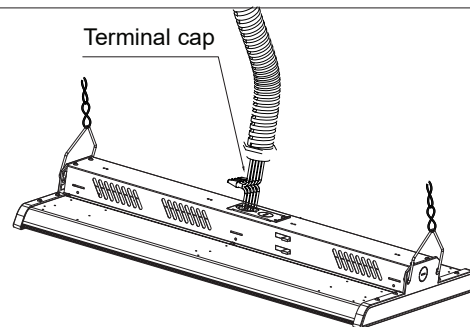

5. Insert the terminal cap and wires into the driver box.

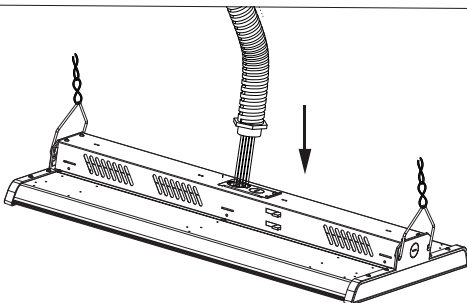

6. Insert the wire terminal joint to the wire entry. Installation completed.

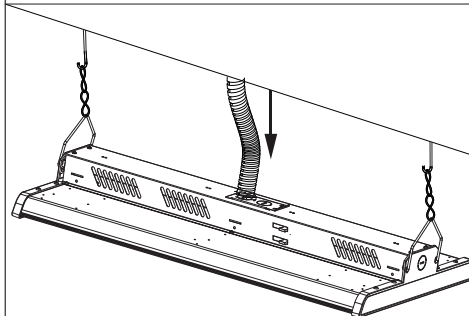


# LINER HIGHBAY LIGHT


## Motion sensing Installation

- QUICK INSTALLATION OF MOTION SENSOR


1. Screw out the nut in the junction box cover.

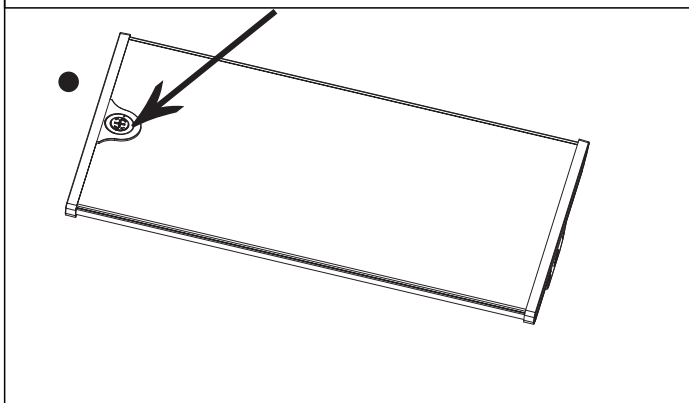


2. Close the junction box cover and lock it with screws.

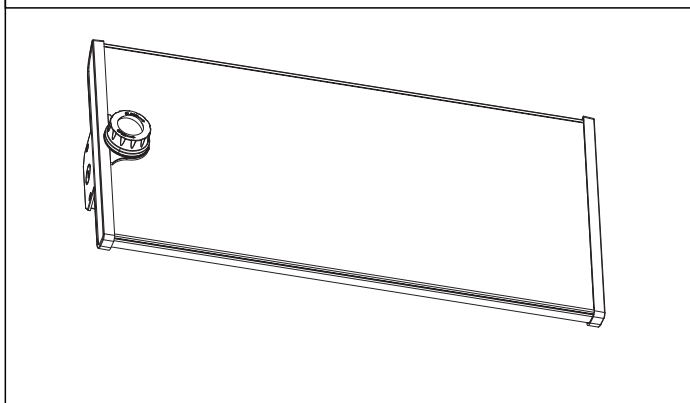

3. Microwave sensor installation completed.

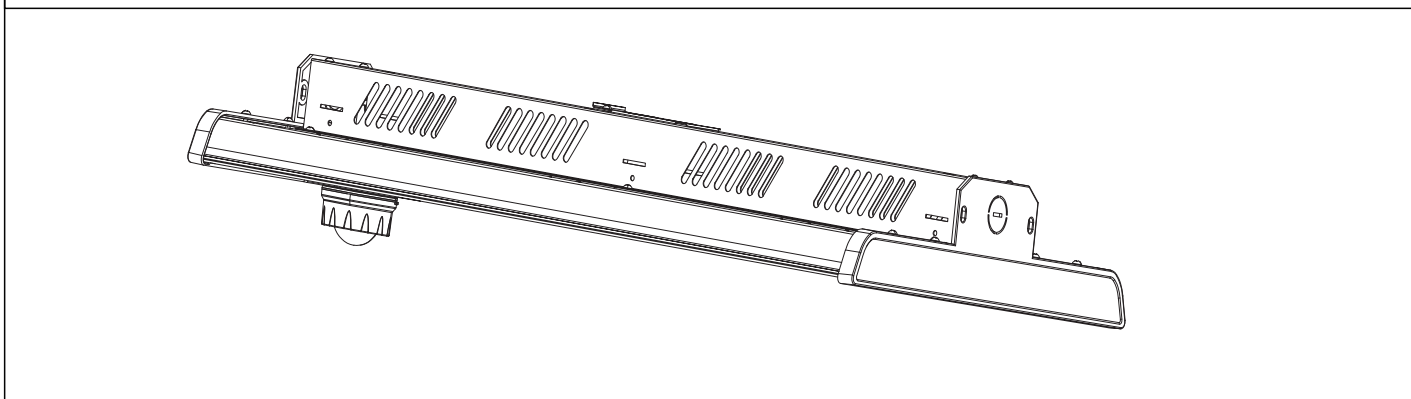


- WIRING DIAGRAM

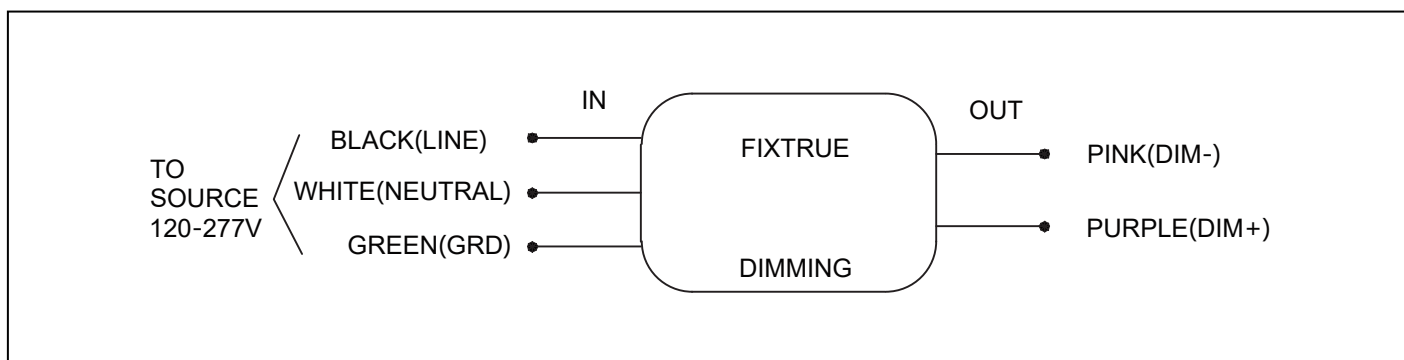

# LINER HIGHBAY LIGHT

## ACCESSORIES(orderseparately)



1 EMERGENCY BATTERY

2 REMOTE CONTROLLER

3 SMART SENSOR

4 SUSPENSION MOUNTED KIT



Emergency Battery



Smart Sensor



Remote Controller



Suspension Mounted Kit

## Introduction to the characteristics of accessories

### Emergency Battery

- UL listed approved
- Emergency power: 20W
- Charging time: 24 hours
- Illumination time: 90 minutes

### Smart Sensor

- Output Dimming: 0-10V
- Max Installation height: 49ft for Microwave, 39ft for PIR
- Detection Distance: 10ft

### Remote Controller

- LCD screen display
- Memory and apply function
- Universal smart controller for dimmable sensor

### Suspension Mounted Kit



- For suspending the Highbay
- Material: staninless steel

# LINER HIGHBAY LIGHT

## DIMENSIONS


### 2FT

591.82\*317.5\*73.66 mm  
23.3\*12.5\* 2.9 inch

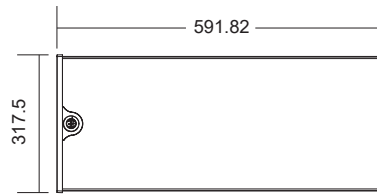


### 3FT

891.54\*317.5\*73.66 mm  
35.1\*12.5\* 2.9 inch

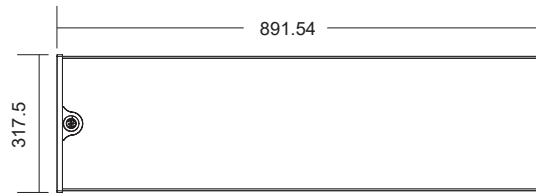

### 4FT

1176.02\*317.5\*73.66 mm  
46.3\*12.5\* 2.9 inch

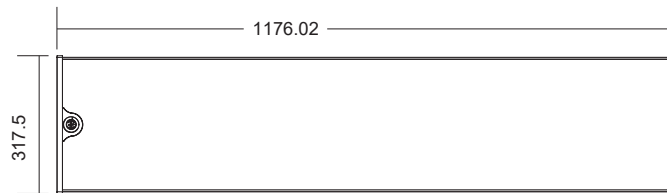

## PACKAGING

Items	Master Carton Size	Gross Weight	Pcs / Carton
J-LHB10-2FT-110/130/160W-4057K	24.8 × 6.8 × 14.2 inch	16.2 lbs	2
J-LHB10-3FT-175/200/225W-4057K	36.6 × 6.8 × 14.2 inch	20.3 lbs	2
J-LHB10-4FT-250/275/300W-4057K	47.8 × 6.8 × 14.2 inch	23.0 lbs	2
J-LHB10-4FT-255/300/400W-4057K	47.8 × 6.8 × 14.2 inch	23.0 lbs	2

