

BFD SECURITY BULLET FLOODLIGHT

DESCRIPTION

naturaLED® Security Wall Lights double head bullet with motion sensor. Our security floodlights come in 20-watt to replace your existing incandescent up to 180-watt, saving up to 70% of energy. Super energy efficient and lasts up to 50,000+ hours average life. naturaLED® security lights are ideal solution for security lights, both residential, commercial and many other outdoor applications.

APPLICATIONS

Security, Accent, Residential, Outdoor, Wall Lighting


FEATURES

- Wet Location
- UL Listed
- ColorTemp: 3000K, 5000K
- Voltage: 120V
- Beam Angle: 70°
- CRI: >80
- Operating temperature: - 4°F - 104°F
- Up to 85% energy savings
- Instant on
- Lightweight
- No Mercury or lead
- Colors: Black, White
- 5 Year Warranty



Rated Life 50,000 Hours
Warranty 5 Years

ACCESSORIES

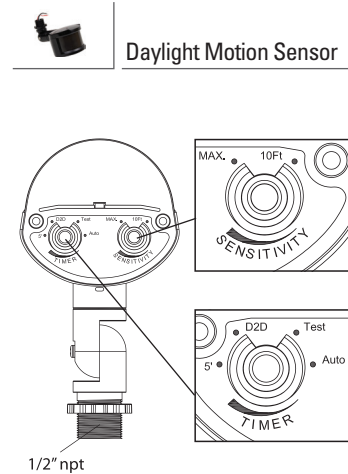

SAMPLE NUMBER LED-FXBFD20/830/BK-SEN

STYLE	SERIES	FAMILY	WATTAGE	CRI/COLOR TEMP	COLOR	ACCESSORY
LED	FX	BFD	20	830	BK	SEN
LED Lighting	Fixture	Bullet Floodlight	20 Watt	CRI 80 3000K	Black (WH) White	Motion Sensor



SECURITY BULLET FLOODLIGHT

WALL & SECURITY LUMINAIRES

ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage	Color/Sensor	Wet Location
20	7082	LED-FXBFD20/830/BK	3000K	1,400	180W	Black	•
20	7083	LED-FXBFD20/850/BK	5000K	1,400	180W	Black	•
20	7672	LED-FXBFD20/830/WH	3000K	1,400	180W	White	•
20	7673	LED-FXBFD20/850/WH	5000K	1,400	180W	White	•
20	7030	LED-FXBFD20/830/BK-SEN	3000K	1,400	180W	Black/ Sensor	•
20	7031	LED-FXBFD20/850/BK-SEN	5000K	1,400	180W	Black/ Sensor	•
20	7066	LED-FXBFD20/830/WH-SEN	3000K	1,400	180W	White/ Sensor	•
20	7067	LED-FXBFD20/850/WH-SEN	5000K	1,400	180W	White/ Sensor	•
20	7032	LED-FXSFD20/830/WH-SEN	3000K	1,400	180W	White/ Sensor	•
20	7033	LED-FXSFD20/850/WH-SEN	5000K	1,400	180W	White/ Sensor	•

ACCESSORIES (Ordered Separately)


Daylight Motion Sensor



P10118 SEN-ES-180NX3-2VR/BK
(Security floodlight motion sensor)


DIMENSIONS

20W (with Sensor)
2.43-lbs

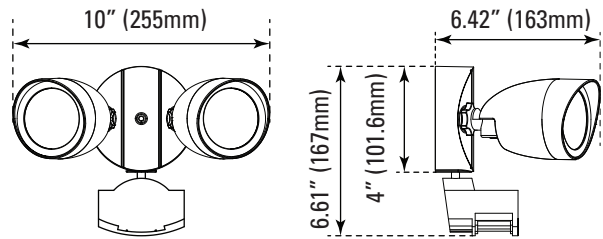

PHOTOMETRICS CHART

20 Watt

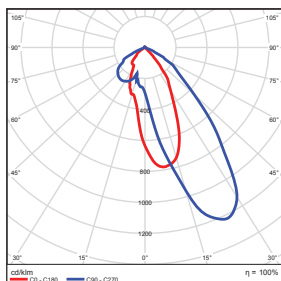

Center Beam fc	Beam Width
17.0f	2.17 fc 6.8 ft 10.3 ft
34.0f	0.54 fc 13.6 ft 20.5 ft
51.0f	0.24 fc 20.5 ft 30.8 ft
68.0f	0.14 fc 27.3 ft 41.1 ft
85.0f	0.09 fc 34.1 ft 51.3 ft
102.0f	0.06 fc 40.9 ft 61.6 ft

Vert. Spread: 22.7°
Horiz. Spread: 33.6°

PACKAGE

Case Qty 5 pcs

