

PROJECT: \_\_\_\_\_

SCHEDULE: \_\_\_\_\_ DATE: \_\_\_\_\_

PREPARE BY: \_\_\_\_\_

NOTES: \_\_\_\_\_

### DESCRIPTION

naturaLED® Porch Outdoor Wall Light fixtures feature with a black finished trim with 50,000 hours average rated life and for wet location. Our Decorative Wall Light can be in used in residential, commercial, hospitality, office buildings and many other applications, making it a perfect energy saving and low maintenance LED solution.



#7158



#7159



#7160



### APPLICATIONS

Outdoor Wall Lighting, Building, Residential, Hospitalities

**Rated Life 50,000 Hours**  
**Warranty 5 Years**

### FEATURES

- Wet Location
- ETL Listed
- ADA Compliant (for DAL only)
- Color Temperature: 4000K
- Voltage: 120V
- Efficacy: 100 lm/W
- Input Current: 0.12A (DWL/DAL) / 0.16A (DWSL)
- Power Factor: >0.9
- CRI: >80 (DWL/DAL) , >90 (DWSL)
- Operating temperature: 5°F - 104°F (DWL/DAL) / -4°F - 140°F (DWSL)
- Instant on
- Trim Color: Black
- Polycarbonate Lens
- 5Year Warranty



**SAMPLE NUMBER** FXDWL14/105L840/BK/OD

FAMILY	SERIES	WATTAGE	LUMENS	CRI/COLOR TEMP	COLOR	RATING
FX Fixture	DAL Decorative Wall Light	14 14 Watt	105L 1,050 Lumens	840 CRI 80 4000K	BK Black	OD Outdoor



# PORCH & OUTDOOR WALL LIGHT


WALL LUMINAIRES

## ORDERING


Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Size	Wet Location
14	<b>7158</b>	FXDWL14/105L840/BK/OD	4000K	1,050	100W	7.68" x 9.88"	•
14	<b>7159</b>	FXDAL14/12FR/98L840/BK/OD	4000K	840	100W	9.45" x 11.04"	•
10.5	<b>7160</b>	FXDWSL10.5/FR/105L940/BK/OD	4000K	1,050	100W	7.5" x 12"	•

## DIMENSIONS


**DWL**  
14W (9.8-inch)  
1.80-lbs

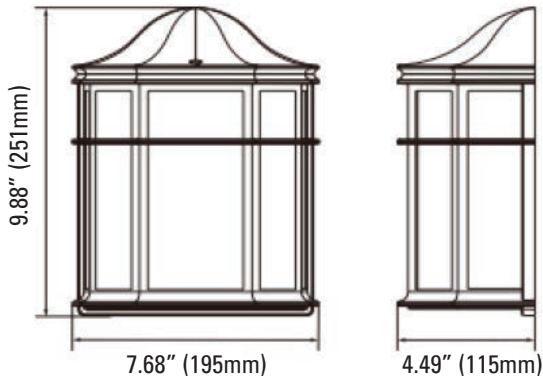

**DAL**  
14W (11.04-inch)  
2.59-lbs

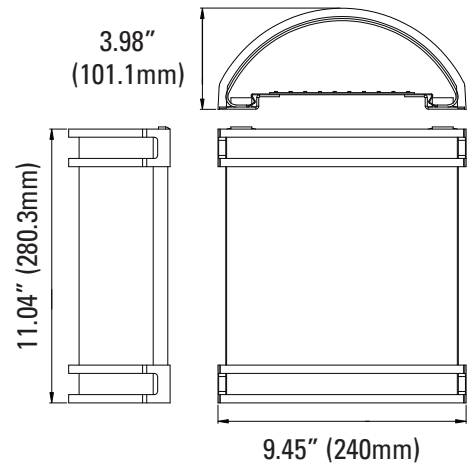


**DWSL**  
10.5W  
3.75-lbs

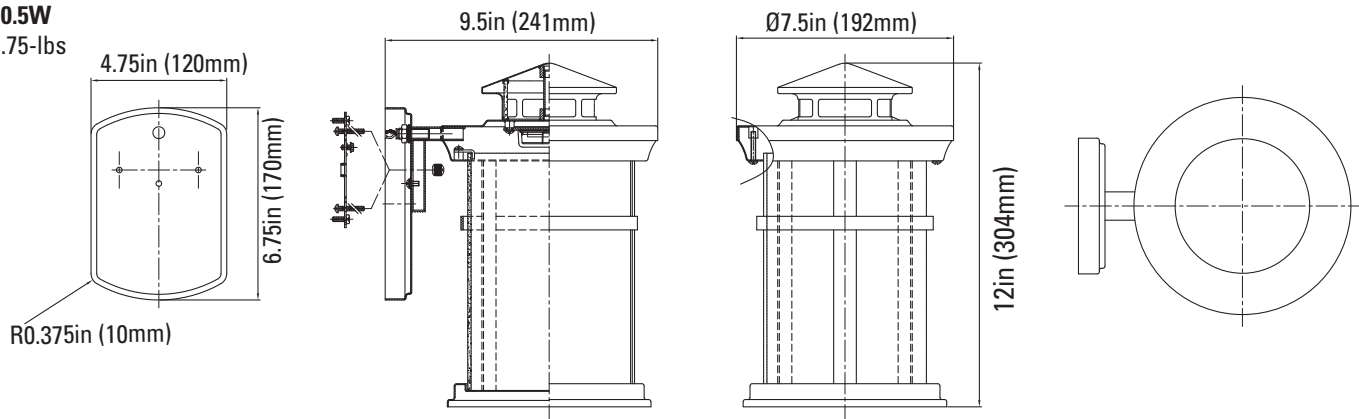

## PACKAGE

**Case Qty**  
2 pcs  
(DWL/DAL)



**Case Qty**  
4 pcs  
(DWSL)

