

DWS WALL SCONCE CCT3

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® Wall Sconce comes in 20-watt, 36watt, up/down or up-and-down (3-way) selections with selectable color temperatures. Energy efficient and lasts up to 50,000+ hours average life. Our wall sconce lights are an ideal lighting solution for security lights, both residential, commercial and many other outdoor applications.



APPLICATIONS

Security, Accent, Residential, Outdoor, Wall Lighting

FEATURES

- IP65 Rated
- ETL/cETL
- ColorTemp: 3CCT(3000K, 4000K, 5000K)
- Voltage: 120-347V
- Beam Angle: 20°
- CRI: >80
- Operating temperature: -40°F - 122°F
- Surge Protect Level: 4KV
- Dimmable: 0-10V
- Photocell: Included with easy ON/OFF Switch
- Light Distribution Switch: Up, Down, or Up & Down Light
- Colors: Black, White
- 5 Year Warranty



Rated Life 50,000 Hours
Warranty 5 Years



SAMPLE NUMBER FX4DWS20SW/20/8CCT3/BK/347-PH



FAMILY	DIAMETER	SERIES	WATTAGE	CRI/COLOR TEMP	COLOR	VOLTAGE	PHOTOCELL
FX Fixture	4 4 inch Diameter	DWS Wall Sconce	20 20 Watt	8CCT3 CRI 80 3000K / 4000K 5000K	BK Black (WH) White	347 120-347V	PH Photocell Included



ORDERING


Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Color	Size	IP65 Rated	Energy Star
10/20	7644	FX4DWS20SW/20/8CCT3/BK/347-PH	3CCT (30/40/50K)	2,300	Black	4"	•	•
10/20	7531	FX4DWS20SW/20/8CCT3/WH/347-PH	3CCT (30/40/50K)	2,300	White	4"	•	•
18/36	7645	FX6DWS36SW/20/8CCT3/BK/347-PH	3CCT (30/40/50K)	4,680	Black	6"	•	•
18/36	7532	FX6DWS36SW/20/8CCT3/WH/347-PH	3CCT (30/40/50K)	4,680	White	6"	•	•

DIMENSIONS

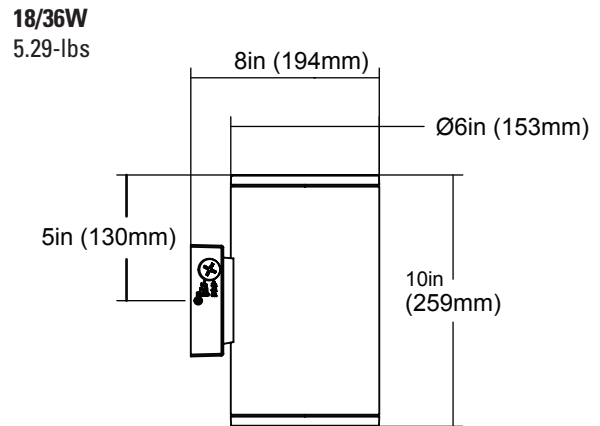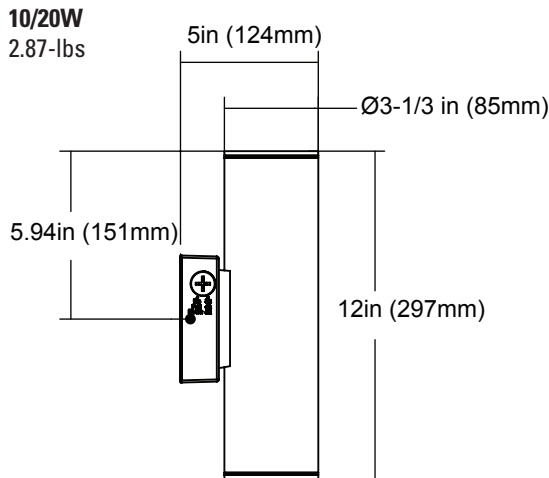

PHOTOMETRICS CHART


4-inch (20W)
Up or Down



Illuminance at a Distance	Center Beam fc.	Beam Width
2.5ft	808 fc.	1.1 ft 1.1 ft
5.0ft	202 fc.	2.2 ft 2.1 ft
7.5ft	191 fc.	3.3 ft 3.2 ft
10.0ft	50.5 fc.	4.4 ft 4.2 ft
12.5ft	32.3 fc.	5.6 ft 5.3 ft
15.0ft	22.4 fc.	6.7 ft 6.4 ft

Vert. Spread: 25.1°
Horiz. Spread: 23.9°


4-inch (20W)
Up & Down



Illuminance at a Distance	Center Beam fc.	Beam Width
2.5ft	915 fc.	0.9 ft 1.0 ft
5.0ft	229 fc.	1.8 ft 1.9 ft
7.5ft	187 fc.	2.7 ft 2.9 ft
10.0ft	57.2 fc.	3.6 ft 3.8 ft
12.5ft	36.6 fc.	4.5 ft 4.8 ft
15.0ft	25.4 fc.	5.5 ft 5.7 ft

Vert. Spread: 20.6°
Horiz. Spread: 21.6°


6-inch (36W)
Up or Down



Illuminance at a Distance	Center Beam fc.	Beam Width
2.5ft	2,246 fc.	0.8 ft 0.8 ft
5.0ft	562 fc.	1.7 ft 1.7 ft
7.5ft	238 fc.	2.5 ft 2.5 ft
10.0ft	140 fc.	3.3 ft 3.4 ft
12.5ft	89.6 fc.	4.2 ft 4.2 ft
15.0ft	62.4 fc.	5.0 ft 5.0 ft

Vert. Spread: 19.0°
Horiz. Spread: 19.1°

6-inch (36W)
Up & Down




Illuminance at a Distance	Center Beam fc.	Beam Width
2.5ft	2,166 fc.	0.8 ft 0.8 ft
5.0ft	543 fc.	1.7 ft 1.7 ft
7.5ft	241 fc.	2.5 ft 2.5 ft
10.0ft	135 fc.	3.3 ft 3.3 ft
12.5ft	86.6 fc.	4.1 ft 4.2 ft
15.0ft	60.2 fc.	5.0 ft 5.0 ft

Vert. Spread: 18.0°
Horiz. Spread: 19.9°

PACKAGE

Case Qty: 5 pcs (20W)



4 pcs (36W)

