

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

RCM 10" Round Canopy

DESCRIPTION

The naturaLED® RCM low-profile round canopy is a durable, cost-effective lighting solution ideal for parking garages, walkways, and outdoor canopies. This IP65-rated fixture provides excellent protection against dust and water, ensuring reliability in various environments. With selectable wattages and color temperatures (CCT), it allows customization for optimal brightness and ambiance. Designed for versatile installation, it supports direct surface mounting on ceilings or walls. Additionally, optional accessories, including a motion sensor, photocell sensor, and emergency driver, enhance energy efficiency, automation, and backup lighting for added convenience and safety.

APPLICATIONS

Breezeway, Parking Garages, Pathway, Perimeter, Entryway, Area Lighting, Building Facades

FEATURES

- DLC Standard
- IP65 Rated
- ETL/cETL Listed
- Wattage & Color Selectable
- Wattage: 14~29W
- Color Temp: CCT3 (30/40/50K)
- Voltage: 120-277V
- Surge Protection: 4KV
- Dimmable: 0-10V
- CRI: >90
- Operating Temperature: -40°F to 122°F
- Beam Angle: 120°
- Lens: Polycarbonate Lens
- Material: Die Cast Aluminum
- Color: Bronze / White
- Optional Accessories for Purchase: Motion Sensor, Emergency Driver, Photocell Sensor, Remote Control
- Warranty: 5-Year Limited Warranty



Rated Life Hours 50,000
Warranty 5 Years

ACCESSORIES

	Motion Sensor
	Emergency Driver
	Photocell Sensor
	Remote Control

Wall Mount



Ceiling Mount



SAMPLE NUMBER		FX10RCM29SW/9CCT3/DB			
SERIES	SIZE	STYLE	WATTAGE	CRI/COLOR TEMP	COLOR
FX	10	RCM	29SW	9CCT3	DB
Fixture	10" Diameter	Round Canopy	29 Selectable Wattage	CRI 90 3CCT (3000/4000/5000K)	Bronze



ROUND CANOPY

WALL & AREA LUMINAIRES

*P= Premium DLC / *S = Standard DLC

ORDERING

Ordering Code	Description	Watts (W)	Lumens (Lm)	CCT (K)	Equiv. Wattage (W)	Voltage	Color	IP65 Rated	DLC (S/P)
7670	FX10RCM29SW/9CCT3/DB	14	1,610	3CCT	150W	120-277V	Bronze	•	S
		22	2,530	(30/40/50K)					
		29	3,335						
7671	FX10RCM29SW/9CCT3/WH	14	1,610	3CCT	150W	120-277V	White	•	S
		22	2,530	(30/40/50K)					
		29	3,335						

ACCESSORIES



Emergency Driver

7336 BAEM4-60BC/MV-A
(4W CEC Compliant LED
Emergency Driver)



Motion Sensor

P10438 SEN-HB001VCD-1
(Motion Sensor)



Remote Control

P10323 SEN-HD06R
(Remote Programmer for P10438)




Photocell Sensor

P10543 SEN-PC-JL-422C
(Small Button Photocell 120-277V)


DIMENSIONS

14/22/29 S/Wattage
5.95-lbs

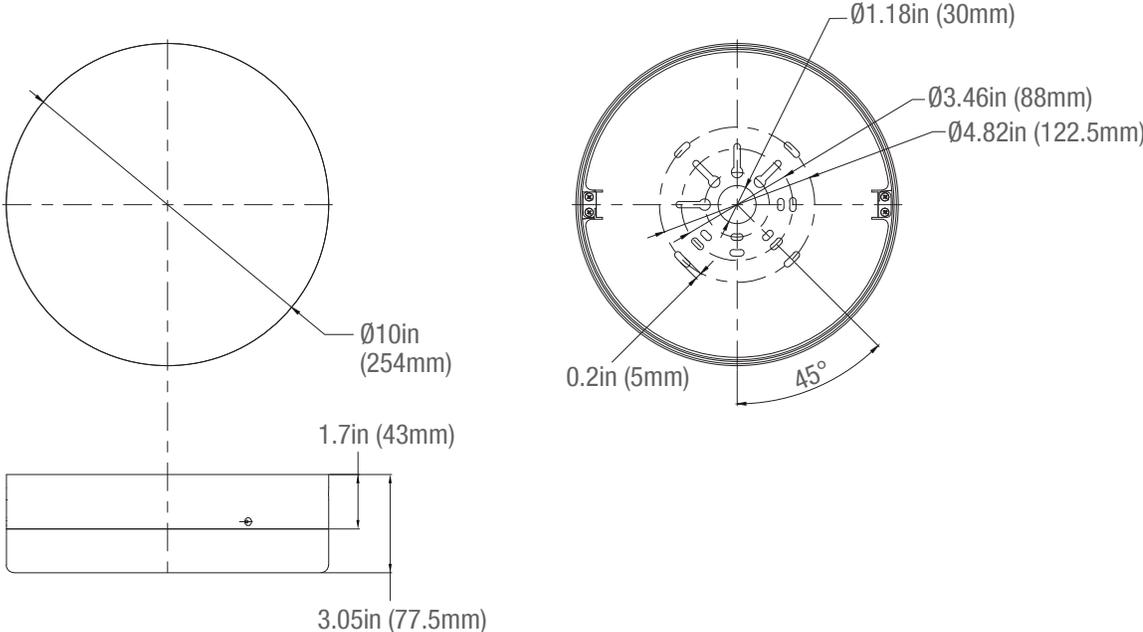

PACKAGE

	Master Carton (pc)	Dimensions (in)	Weight (lb)
29 S/W	2	11"X7.87"x11.40"	11.90



PHOTOMETRICS

14/22/29 S/ Wattage

BUG rating B1 U3 G1

