

PROJECT:

SCHEDULE:

DATE:

PREPARE BY:

NOTES:

PST Post Top Area Light Z10

DESCRIPTION

The naturaLED® sleek and modern post top fixture features three vertical arms, offering a clean and stylish design. It is designed for effortless installation, retrofitting seamlessly onto standard 2-3/8" tenons and 3" poles, making the switch to LED both time- and cost-efficient. This DLC Premium open round post top fixture replaces up to 250-watt metal halide fixtures while delivering up to 12,000 lumens of bright illumination. Additionally, the pre-installed Z10 receptacle enables simple plug-and-play control upgrades during installation or at a later stage.



APPLICATIONS

Corporate Campus, Education, Healthcare, Parking Structure, Parks, Hospitalities, Walkways, Commercial Office Buildings, Landscape Lighting



Rated Life Hours 50,000
Warranty 5 Years

FEATURES

- DLC Premium
- IP65 Rated
- ETL/cETL Listed
- Wattage & Color Selectable
- Z10 Receptacle Pre-installed
- Wattage: 35~60W, 60~100W
- Color Temp: CCT3 (30/40/50K)
- Voltage: 120-277V
- Surge Protection: 20KV
- Dimmable: 0-10V
- CRI: >80
- Operating Temperature: -40°F to 122°F
- Beam Angle: Type 5
- Material: Die Cast Aluminum
- Color: Black / Bronze / White
- Optional Accessories for Purchase: Z10 Receptacles, Emergency Driver
- Warranty: 5-Year Limited Warranty

ACCESSORIES

	Emergency Driver
	Motion Sensor
	Remote

SAMPLE NUMBER PST16/60S/T5/8C3/BZ-Z10

SERIES	SIZE	WATTAGE	BEAM ANGLE	CRI/COLOR TEMP	COLOR	ACCESSORY
PST Post Top	16 16-inch	60S <60 Selectable Wattages	T5 Type 5	8C3 CRI 80 3CCT (3000/4000/5000K)	BZ Bronze	Z10 Z10 Control-Ready



POST TOP AREA LIGHT Z10

PARKING & AREA LUMINAIRES

*P= Premium DLC / *S = Standard DLC

ORDERING

Ordering Code	Description	Watts (W)	Lumens (Lm)	CCT (K)	Equiv. Wattage (W)	Voltage	Color	IP65 Rated	DLC (S/P)
9728	PST16/60S/T5/8C3/BZ-Z10	30	3,600	3CCT	175W	120-277V	Bronze	•	P
		45	5,400	(30/40/50K)					
		60	7,200						
9729	PST16/100S/T5/8C3/BZ-Z10	60	7,200	3CCT	250W	120-277V	Bronze	•	P
		80	9,600	(30/40/50K)					
		100	12,000						
9726	PST16/60S/T5/8C3/BK-Z10	30	3,600	3CCT	175W	120-277V	Black	•	P
		45	5,400	(30/40/50K)					
		60	7,200						
9727	PST16/100S/T5/8C3/BK-Z10	60	7,200	3CCT	250W	120-277V	Black	•	P
		80	9,600	(30/40/50K)					
		100	12,000						
9730	PST16/60S/T5/8C3/WH-Z10	30	3,600	3CCT	175W	120-277V	White	•	P
		45	5,400	(30/40/50K)					
		60	7,200						
9731	PST16/100S/T5/8C3/WH-Z10	60	7,200	3CCT	250W	120-277V	White	•	P
		80	9,600	(30/40/50K)					
		100	12,000						

ACCESSORIES

Emergency Driver



7336 BAEM4-60BC/MV-A
(4W Emergency Driver for 60SW)



7334 BAEM15-48BC/MV-A
(15W Emergency Driver for 100SW)

Motion Sensor Photocell & Remote Control



P10520 SEN-ANT-5-Z10-PC
(Z10 Twist-Lock Photocell 12-24Vdc - White)



P10521 SEN-ANT-5-Z10
(Z10 Twist-Lock Microwave Motion and Photocell Sensor, 0-10V, 12-24Vdc - White)




P10522 SEN-ANT-6-Z10
(Z10 Twist-Lock PIR Motion and Photocell Sensor, 0-10V, 12-24Vdc - White)



P10316 SEN-BRI-RC100
(Remote Programmer for P10521/P10522)


DIMENSIONS

60 S/Wattage
100 S/Wattage
13.50-lbs

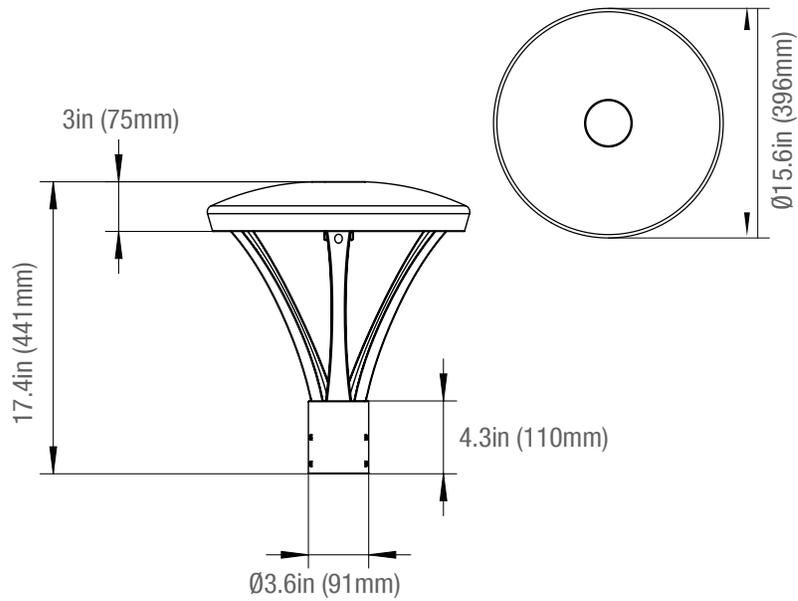

PACKAGE

	Master Carton (pc)	Dimensions (in)	Weight (lb)
60 S/W	1	21.50"x18.50"x4.70"	14.60
100 S/W	1	21.50"x18.50"x4.70"	14.60






POST TOP AREA LIGHT Z10

PARKING & AREA LUMINAIRES

PHOTOMETRICS

60 S/Wattage

BUG rating B3 U2 G3

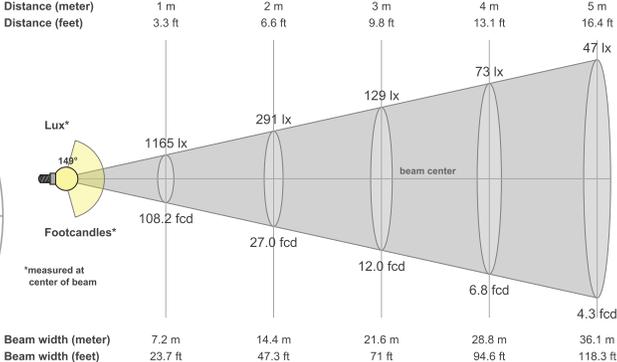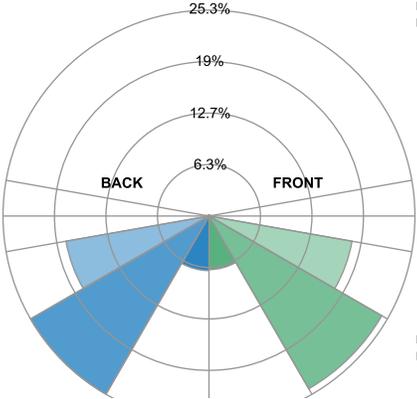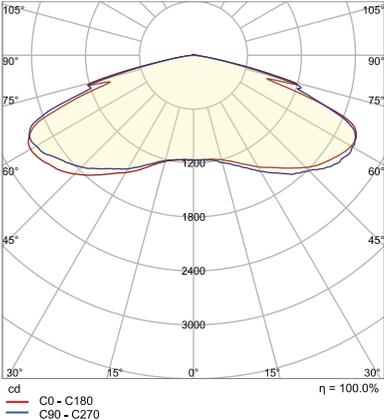

100 S/Wattage

BUG rating B3 U2 G3

