

RH-LED-12-100-8XX-P /G2

ROUND LED HIGH BAY FIXTURE



100W, 120-277V Input, 0-10V Dimming



5 YEAR
WARRANTY

PRODUCT FEATURES


- Includes screw-in receptacle for easy sensor and control installation.
- Powered by 0–10V dimming LED driver
- Ring-bolt mounting accessory included
- 6' cord for power input and dimming wires
- Powder-coated aluminum housing; Polycarbonate lens
- Ribbed lens to reduce glare
- Low optical flicker
- Built-in 6kV surge protection
- LED lifetime: L70 >100,000 hours @ 25°C fixture ambient
- Ambient operating temperature: -40°C/-40°F to 50°C/122°F
- IP65 rated, wet location

PERFORMANCE SPECIFICATIONS


Catalog Number	Input Voltage	Wattage	Color Temperature	Lumen Output	Efficacy	Rated Life	CRI	Power Factor
RH-LED-12-100-840-P /G2	120–277V	100W	4000K	15,700	157 lm/W	50,000 hrs	>80	>0.9
RH-LED-12-100-850-P /G2			5000K	15,900	159 lm/W			

PHOTOMETRIC SPECIFICATIONS

ISOCANDELA PLOT

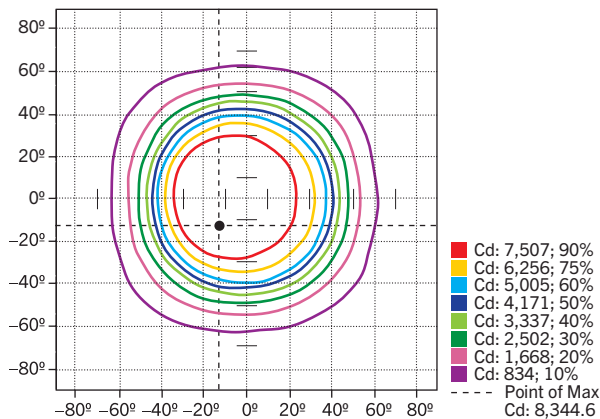

POLAR CANDELA DISTRIBUTION

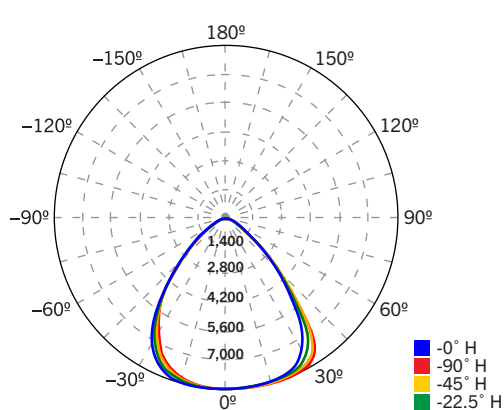

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0–30	6,713.2	42.5%
0–40	10,609.4	67.2%
0–60	14,760.4	93.5%
60–90	1,004.4	6.4%
0–90	15,793.5	100%

RH-LED-12-100-8XX-P /G2

ROUND LED HIGH BAY FIXTURE

PHYSICAL SPECIFICATIONS

