SATCO | NUVO

LED CYLINDER FLUSH MOUNTS

BEAM SELECTABLE | FIELD SELECTABLE

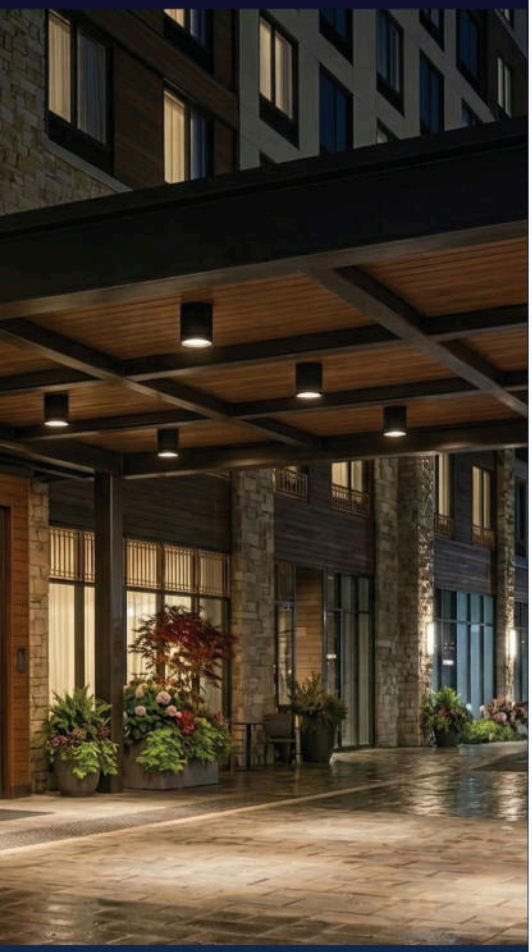



FIELD SELECTABLE – 3 CCT & 3 WATTAGES

BEAM SELECTABLE - 30°/40°/50°/60°

UNIVERSAL 120-347V OPERATION WITH 0-10V DIMMING

ALUMINUM HOUSING IN BLACK OR WHITE FINISHES

SUGGESTED APPLICATIONS

Commercial
Hospitality
Offices
Religious Facilities

One fixture...Three ways to customize performance.

SATCO|NUVO's LED Cylinder Flush Mounts combine selectable wattage, CCT, and beam angle in one versatile solution, making it easy to customize lighting performance for the application. Designed to simplify inventory while maximizing flexibility, these canister lights make it easy to adjust light output, color temperature, and beam distribution on-site without changing fixtures. Available in black and white finishes with universal 120-347V operation and 0-10V dimming, they deliver dependable performance, simplified specification, and exceptional value across a wide range of commercial applications.

SATCO | NUVO

LED CYLINDER FLUSH MOUNTS
BEAM SELECTABLE | FIELD SELECTABLE

GENERAL SPECIFICATIONS

Range Voltage: 120-347V
Frequency: 50/60Hz
Power Factor: >0.9
THD: <20%
Dimming: 0-10V Dimmable
Surge Protection Rating: 4kV
Efficacy: up to 107 LPW
CRI: 80+
Wattage Selectable: 35/28/21W
Max Replacement Wattage: 200W
Lumen Range: 2121-3610
CCT Selectable: 3000/4000/5000K
Beam Selectable: 30°/40°/50°/60°

Input Current: 0.29-0.10/0.23-0.08/0.18-0.06A
BUG Rating: B3-U2-G0
Location Rating: Damp
IP Rating: IP40
IK Rating: IK05
Ambient Operating Temperature: -40°F to +113°F (-40°C to +45°C)
Housing Material: Aluminum
Lens Material: Polycarbonate (PC)
Wire Length: 13 Inches
Mounting Options: Surface or Pendant (with Optional Accessory)
Functional Life: 50,000 Hours
Warranty: 5 Year

CERTIFIED RoHS COMPLIANT

ITEM SPECIFICATIONS / DIMENSIONS

Item	Finish	Diameter (A)	Height (B)	Weight
65-1050	White	5.75"	7.24"	3.53 Lbs.
65-1051	Black	5.75"	7.24"	3.53 Lbs.

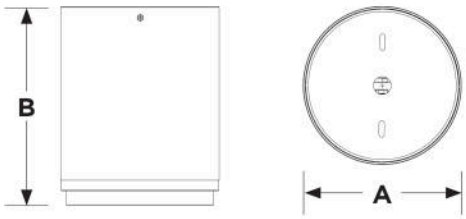

FEATURES

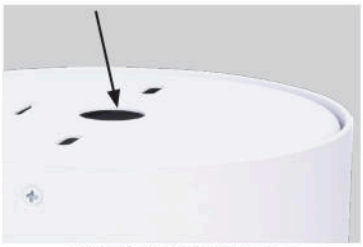
Internal CCT & Wattage Selectable Switches

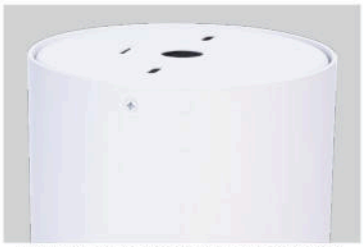
Universal Keyhole Slots for Direct Surface or Junction Box Mounting

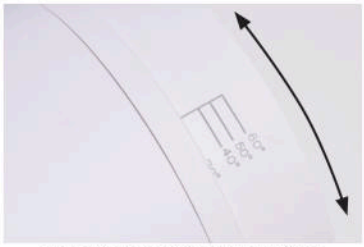
Beam Selectable by Twisting Lower Section


Durable Aluminum Frame & Polycarbonate Lens

OPTIONAL ACCESSORIES

Item	FOR USE WITH 65-1050	
65-1054	Pendant Kit for 65-1050; 8 Foot Cord; Water Proof cover	

Item	FOR USE WITH 65-1051	
65-1055	Pendant Kit for 65-1051; 8 Foot Cord; Water Proof Cover	

Specifications are subject to change without prior notice.
Warning: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Meets requirements of ICES-005 issue 5 class B for use in residential and commercial applications.
IMPORTANT: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Min 75°C SUPPLY CONDUCTORS
CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
Visit satco.com/service/warranty for complete warranty details.

© Satco Products, Inc. All rights reserved. Rev. 07/26 SN2101