SATCO | NUVO



# LED OUTDOOR WALL CYLINDERS

## UP, DOWN, OR UP & DOWN LIGHTING OPTIONS
## CCT SELECTABLE



6" White



3" Dark Bronze



4" Black

**Available in 3 sizes in Black, White and Dark Bronze Finishes**

SATCO|NUVO's LED Outdoor Wall Cylinders combine modern styling with enhanced performance and flexibility for today's exterior lighting applications. Choose from 3-inch, 4-inch, and 6-inch models, all featuring 3 CCT selectable technology (3000K/4000K/5000K) to customize the lighting environment to suit the space. Available in dedicated up or downlight, or combined up/down lighting configurations, each fixture is equipped with an integrated by-passable photocell for added control and convenient dusk-to-dawn operation. Multiple sizes and finishes make it easy to create a cohesive look across residential and commercial projects.

**AVAILABLE IN UP, DOWN, AND UP/DOWN CONFIGURATIONS**

**3 CCT SELECTABLE**

**INTEGRATED BY-PASSABLE PHOTOCELL**

**OFFERED IN THREE SIZES AND THREE FINISH OPTIONS**

**DIE-CAST ALUMINUM CONSTRUCTION**

**SUGGESTED APPLICATIONS**

Building Facades
Entryways
Hospitality
Hallways
Stairwells

CCT SELECTABLE | 90+ CRI | 120-277V | WET LOCATION | IP 65 | 50,000 HOURS | 3 YEAR WARRANTY | TRUSTED NLB WARRANTY

# LED OUTDOOR WALL CYLINDERS

UP, DOWN, OR UP & DOWN LIGHTING OPTIONS | CCT SELECTABLE

## GENERAL SPECIFICATIONS

**Input Voltage:** 120-277V
**Frequency:** 50/60Hz
**Power Factor:** >0.9
**THD:** <20%
**Dimming:** Non-Dimmable
**Surge Protection Rating:** 2kV
**Efficacy:** Up to 105 LPW
**CRI:** 90+
**CCT Selectable:** 3000K/4000K/5000K

**Beam Angle:** 50°
**Location Rating:** Wet
**IP Rating:** IP65
**IK Rating:** IK05
**Ambient Operating Temperature:** -40°F to +122°F (-40°C to +50°C)
**Housing Material:** Die-cast Aluminum
**Lens Material:** Glass
**Functional Life:** 50,000 Hours
**Warranty:** 3 Years

Intertek

## ITEM SPECIFICATIONS / ORDER INFO


| Item | Cylinder Size | Finish | Lumens | Wattage | Max Replacement Wattage | Light Distribution |
|---|---|---|---|---|---|---|
| 65-1750 | 3″ | White | 950/900/850 | 10W | 60W | Single Direction (Up or Down) |
| 65-1751 | 3″ | Black | 950/900/850 | 10W | 60W | Single Direction (Up or Down) |
| 65-1752 | 3″ | Dark Bronze | 950/900/850 | 10W | 60W | Single Direction (Up or Down) |
| 65-1753 | 4″ | White | 950/900/850 | 10W | 60W | Single Direction (Up or Down) |
| 65-1754 | 4″ | Black | 950/900/850 | 10W | 60W | Single Direction (Up or Down) |
| 65-1755 | 4″ | Dark Bronze | 950/900/850 | 10W | 60W | Single Direction (Up or Down) |
| 65-1756 | 6″ | White | 1900/1800/1700 | 20W | 100W | Single Direction (Up or Down) |
| 65-1757 | 6″ | Black | 1900/1800/1700 | 20W | 100W | Single Direction (Up or Down) |
| 65-1758 | 6″ | Dark Bronze | 1900/1800/1700 | 20W | 100W | Single Direction (Up or Down) |
| 65-1759 | 3″ | White | 950/900/850 | 10W | 60W | Dual Direction (Up & Down) |
| 65-1760 | 3″ | Black | 950/900/850 | 10W | 60W | Dual Direction (Up & Down) |
| 65-1761 | 3″ | Dark Bronze | 950/900/850 | 10W | 60W | Dual Direction (Up & Down) |
| 65-1762 | 4″ | White | 1900/1800/1700 | 20W | 100W | Dual Direction (Up & Down) |
| 65-1763 | 4″ | Black | 1900/1800/1700 | 20W | 100W | Dual Direction (Up & Down) |
| 65-1764 | 4″ | Dark Bronze | 1900/1800/1700 | 20W | 100W | Dual Direction (Up & Down) |
| 65-1765 | 6″ | White | 3780/3600/3420 | 36W | 200W | Dual Direction (Up & Down) |
| 65-1766 | 6″ | Black | 3780/3600/3420 | 36W | 200W | Dual Direction (Up & Down) |
| 65-1767 | 6″ | Dark Bronze | 3780/3600/3420 | 36W | 200W | Dual Direction (Up & Down) |

Specifications are subject to change without prior notice.
Warning: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Meets requirements of ICES-005 issue 5 class B for use in residential and commercial applications.
Min 75°C SUPPLY CONDUCTORS
IMPORTANT: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
Visit satco.com/service/warranty for complete warranty details.



© Satco Products, Inc. All rights reserved. 6/26 SN2070

## DIMENSIONS / WEIGHTS


| Item | Cylinder Size | Width (A) | Height (B) | Extends (C) | Weight |
|---|---|---|---|---|---|
| 65-1750 | 3″ | 4.57″ | 6.77″ | 4.17″ | 1.70 Lbs. |
| 65-1751 | 3″ | 4.57″ | 6.77″ | 4.17″ | 1.70 Lbs. |
| 65-1752 | 3″ | 4.57″ | 6.77″ | 4.17″ | 1.70 Lbs. |
| 65-1753 | 4″ | 4.57″ | 11.81″ | 5.00″ | 2.31 Lbs. |
| 65-1754 | 4″ | 4.57″ | 11.81″ | 5.00″ | 2.31 Lbs. |
| 65-1755 | 4″ | 4.57″ | 11.81″ | 5.00″ | 2.31 Lbs. |
| 65-1756 | 6″ | 6.02″ | 10.20″ | 7.76″ | 5.50 Lbs. |
| 65-1757 | 6″ | 6.02″ | 10.20″ | 7.76″ | 5.50 Lbs. |
| 65-1758 | 6″ | 6.02″ | 10.20″ | 7.76″ | 5.50 Lbs. |
| 65-1759 | 3″ | 4.57″ | 6.77″ | 4.17″ | 1.72 Lbs. |
| 65-1760 | 3″ | 4.57″ | 6.77″ | 4.17″ | 1.72 Lbs. |
| 65-1761 | 3″ | 4.57″ | 6.77″ | 4.17″ | 1.72 Lbs. |
| 65-1762 | 4″ | 4.57″ | 11.81″ | 5.00″ | 2.36 Lbs. |
| 65-1763 | 4″ | 4.57″ | 11.81″ | 5.00″ | 2.36Lbs. |
| 65-1764 | 4″ | 4.57″ | 11.81″ | 5.00″ | 2.36 Lbs. |
| 65-1765 | 6″ | 6.02″ | 10.20″ | 7.76″ | 5.58 Lbs. |
| 65-1766 | 6″ | 6.02″ | 10.20″ | 7.76″ | 5.58 Lbs. |
| 65-1767 | 6″ | 6.02″ | 10.20″ | 7.76″ | 5.58 Lbs. |



3-Inch Cylinder

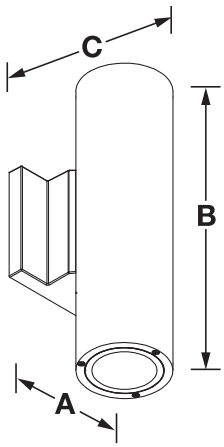


4-Inch Cylinder

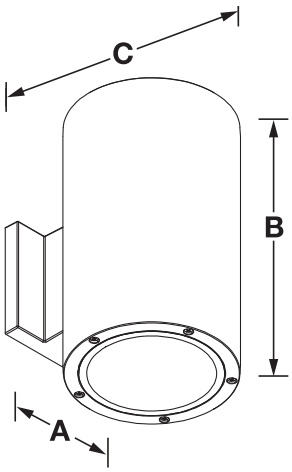

6-Inch Cylinder

## FEATURES

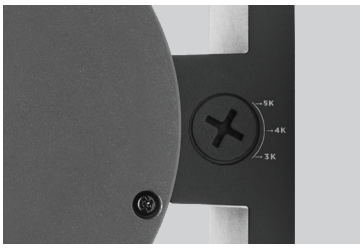


CCT Selectable Switch


Die-cast Aluminum Housing



By-Passable Photocell

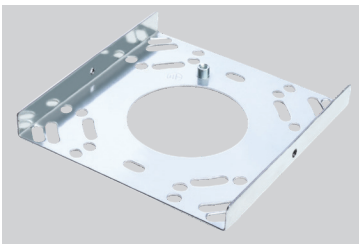
Universal Mount Backplate


© Satco Products, Inc. All rights reserved. 6/26 SN2070