
SATCO|NUVO

LED EXIT AND EMERGENCY LIGHT COMBO

CHICAGO APPROVED







- **RED LETTERS ON WHITE BACKGROUND**
- **CEILING, WALL OR SIDE MOUNTING**
- **STEEL HOUSING CONSTRUCTION**
- **90-MINUTE BATTERY BACKUP RUNTIME**
- **TEST SWITCH AND AC SUPPLY INDICATOR**
- **SUGGESTED APPLICATIONS**
  Commercial & Industrial, Garages, Retail, Schools, Hospitals

SATCO|NUVO's Chicago Approved LED Exit & Emergency Light Combo Fixtures provide dependable emergency egress illumination in one space-saving solution. A premium frosted glass face with bold red 6-inch EXIT lettering is paired with durable steel construction and two adjustable LED emergency light heads to help direct light where it is needed most. Universal wall, ceiling, and end mounting options simplify installation, while the integrated emergency battery backup, push-to-test button, and AC power indicator provide reliable operation during power outages. These fixtures are UL 924 certified, damp location rated, and designed to meet Chicago code requirements. Optional Single and Double Face directional arrow panel kits are sold separately to accommodate a variety of installation requirements.

RED LETTERING | 120-277V | DAMP LOCATION | 90 MIN RUNTIME | 2 YEAR WARRANTY

LED EXIT AND EMERGENCY LIGHT COMBO
CHICAGO APPROVED

GENERAL SPECIFICATIONS

Input Voltage: 120-277V
Frequency: 50/60Hz
Power Factor: >0.4
THD: <130%
Emergency Backup: Yes
Emergency Duration / Run Time: 90 Minutes
Recharge Time: 24 Hours
Battery Push to Test Button: Yes
Battery Type: LiFePO4
Letter Height: 6″


Letter Color: Red
Face Type: Single
Directional Arrow: Directional Panel Kits sold separately
Housing Construction / Finish: Steel / Gloss White
Lens Material / Finish: Glass / Frosted
Mounting Options: Universal
Location Rating: Damp
Ambient Operating Temperature: +41°F to +113°F (+5°C to +45°C)
Warranty: 2 Year

ITEM SPECIFICATIONS / ORDER INFO

Item	Product Code	Wattage	CCT	Input Current @120/277V	Lumens	Number of Lamp Heads	Remote Capable
67-310	EXC/WH/U/BB/CH	6.5W	5700K	0.05-0.02A	810L	2	No
67-311	EXC/WH/U/BB/RC/CH	6.5W	5700K	0.05-0.02A	810L	2	Yes

DIMENSIONS / WEIGHTS

Item	Width (A)	Height (B)	Depth (C)	Weight
67-310	12.09″	13.29″	2.86″	7.28 Lbs.
67-311	12.09″	13.29″	2.86″	7.28 Lbs.

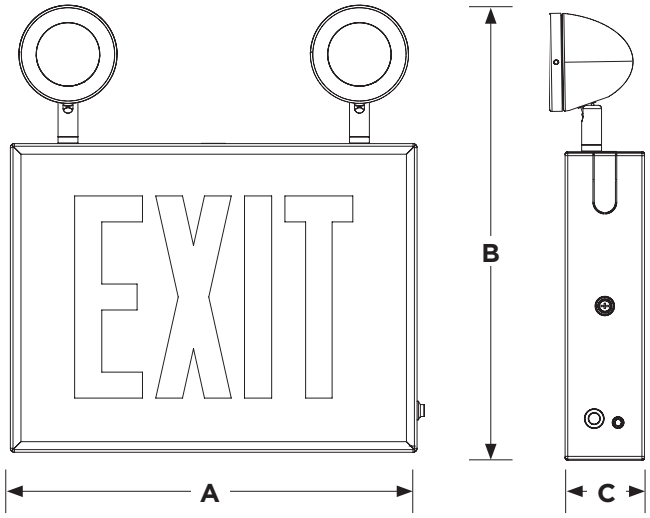

NOMENCLATURE

EX/WH/U/XX/XX/CH
1 2 3 4 5 6

1-Product Family (EXC=Exit Sign/Emergency Light Combo)
2-Housing Color (WH = White)
3-Input Voltage (U=120-277V)
4-Battery Backup
5-Remote Capable (Blank=No support, RC=Remote Capable)
6-City of Code (CH=Chicago)

FEATURES



Red Lettering
Single Face



Test Switch & Power
Supply Indicator



Ceiling Wall or Side
Mount Capable


Two Adjustable LED
Light Heads

© Satco Products, Inc. All rights reserved. Rev. 11/26 SN2104

OPTIONAL ACCESSORIES

Item	Faceplate Accessories (Compatible with 67-310 & 67-311)	
67-320	Exit Sign Panel Accessory; White Glass Panel; Red EXIT Signage; No Arrows	
67-321	Exit Sign Panel Accessory; White Glass Panel; Red EXIT Signage; Right Direction Arrow	
67-322	Exit Sign Panel Accessory; White Glass Panel; Red EXIT Signage; Left Direction Arrow	
67-323	Exit Sign Panel Accessory; White Glass Panel; Red EXIT Signage; Double Direction Arrow	
67-324	Exit Sign Panel Accessory; White Glass Panel; Red STAIR Signage; No Arrows	
67-325	Exit Sign Panel Accessory; White Glass Panel; Red STAIR Signage; Right Direction Arrow	
67-326	Exit Sign Panel Accessory; White Glass Panel; Red STAIR Signage; Left Direction Arrow	
67-327	Exit Sign Panel Accessory; White Glass Panel; Red STAIR Signage; Double Direction Arrow	
67-330	Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red EXIT Signage; No Arrows	
67-331	Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red EXIT Signage; One Panel Has Right Direction Arrow; The Other Panel Has A Left Direction Arrow	
67-332	Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red EXIT Signage; Double Direction Arrows	
67-333	Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red STAIR Signage; No Arrows	
67-334	Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red STAIR Signage; One Panel Has Right Direction Arrow; The Other Panel Has a Left Direction Arrow	
67-335	Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red STAIR Signage; Double Direction Arrows	
Item	**Remote Light Head Accessories** (Compatible with 67-311)	
67-395	Remote Emergency Light; Chicago Approved; White Housing; Single Head; 6 Vdc 1.5 W	
67-396	Remote Emergency Light; Chicago Approved; White Housing; Dual Head; 6 Vdc 3.0 W	

© Satco Products, Inc. All rights reserved. Rev. 11/26 SN2104

MOUNTING ACCESSORIES

Item	Pendant Mounting Accessories (Compatible with 67-310 & 67-311)	Size	Length	Finish	
67-900	Pendant Mounting Kit, Threaded Stem, Round Swivel Canopy Cover	1/4 IPS	12″	White	
67-901	Pendant Mounting Kit, Threaded Stem, Round Swivel Canopy Cover	1/4 IPS	12″	Black	
67-902	Pendant Mounting Kit, Threaded Stem, Round Swivel Canopy Cover	1/4 IPS	12″	Silver	
67-910	Pendant Extension Kit, Threaded Stem, 1/4 IPS Coupler	1/4 IPS	6″	White	
67-911	Pendant Extension Kit, Threaded Stem, 1/4 IPS Coupler	1/4 IPS	6″	Black	
67-912	Pendant Extension Kit, Threaded Stem, 1/4 IPS Coupler	1/4 IPS	6″	Silver	
67-915	Pendant Extension Kit, Threaded Stem, 1/4 IPS Coupler	1/4 IPS	12″	White	
67-916	Pendant Extension Kit, Threaded Stem, 1/4 IPS Coupler	1/4 IPS	12″	Black	
67-917	Pendant Extension Kit, Threaded Stem, 1/4 IPS Coupler	1/4 IPS	12″	Silver	

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Meets requirements of ICES-005 issue 5 Class B for use in residential and commercial applications.

Specifications are subject to change without prior notice.

Visit satco.com/service/warranty for complete warranty details.

© Satco Products, Inc. All rights reserved. Rev. 11/26 SN2104