SATCO|NUVO

# LED EXIT LIGHTS

## CHICAGO APPROVED







67-300, 67-301




67-302



- **RED LETTERS ON WHITE BACKGROUND**
- **CEILING, WALL OR SIDE MOUNTING**
- **STEEL HOUSING CONSTRUCTION**
- **90-MINUTE BATTERY BACKUP RUNTIME**
- **TEST SWITCH AND AC SUPPLY INDICATOR**

**SUGGESTED APPLICATIONS**
Commercial & Industrial, Garages, Retail, Schools, Hospitals

SATCO|NUVO's Chicago Approved LED Exit Signs deliver dependable emergency egress illumination with a clean, professional appearance. A premium frosted glass face with bold red 6-inch EXIT lettering is paired with durable steel construction for long-lasting performance. Universal mounting options support wall, ceiling, and end installations. The AC-only model is available for use with backup generators while the Battery Backup models include an integrated emergency battery backup with a 90-minute run time, push-to-test button, and AC power indicator for reliable operation during power outages. UL 924 certified and designed to meet Chicago code requirements, these exit signs are rated for damp locations and provide dependable performance when it matters most. Optional Single and Double Face directional arrow panel kits are sold separately to accommodate a variety of installation requirements.

RED LETTERING | 120-277V | DAMP LOCATION | 90 MIN RUNTIME | 2 YEAR WARRANTY

## GENERAL SPECIFICATIONS

**Input Voltage:** 120V-277V
**Frequency:** 50/60Hz
**Power Factor:** >0.4
**THD:** <130%
**Letter Height:** 6″
**Letter Color:** Red
**Face Type:** Single

**Directional Arrow:** Directional Panel Kits sold separately
**Housing Construction / Finish:** Steel / Gloss White
**Lens Material / Finish:** Glass / Frosted
**Mounting Options:** Universal
**Location Rating:** Damp
**Ambient Operating Temperature:** +41°F to +113°F (+5°C to +45°C)
**Warranty:** 2 Year

## ITEM SPECIFICATIONS / ORDER INFO

| Item | Product Code | Wattage | Input Current @ 120V/277V | Emergency Backup | Emergency Duration/Run Time | Recharge Time | Battery Push to Test Button | Battery Type |
|---|---|---|---|---|---|---|---|---|
| 67-300 | EX/WH/U/BB/CH | 4W | 0.03-0.01A | Yes | 90 Minutes | 24 Hours | Yes | LiFePO4 |
| 67-301 | EX/WH/U/BB/RC/CH | 6.5W | 0.05-0.02A | Yes | 90 Minutes | 24 Hours | Yes | LiFePO4 |
| 67-302 | EX/WH/U/CH | 4W | 0.03-0.01A | No | - | - | - | - |

## DIMENSIONS / WEIGHTS

| Item | Width (A) | Height (B) | Depth (C) | Weight |
|---|---|---|---|---|
| 67-300 | 12.13″ | 9.13″ | 2.38″ | 5.95 Lbs. |
| 67-301 | 12.13″ | 9.13″ | 2.38″ | 5.95 Lbs. |
| 67-302 | 12.13″ | 9.13″ | 2.38″ | 5.79 Lbs. |

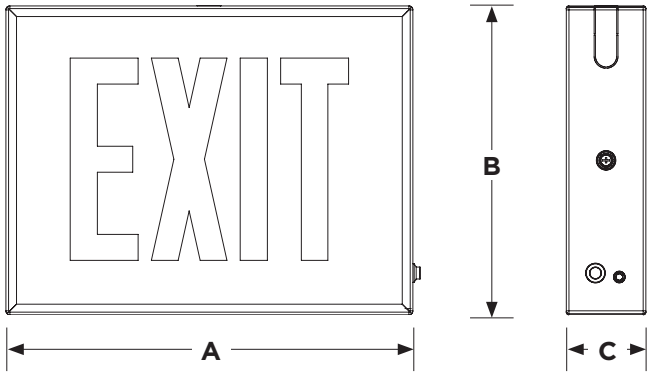


## NOMENCLATURE

EX/WH/U/XX/XX/CH
1 2 3 4 5 6

1-Product Family (EX=Exit Sign)
2-Housing Color (WH = White)
3-Input Voltage (U=120-277V)
4-Battery Backup (Blank=AC Only, BB=Battery Backup)
5-Remote Capable (Blank=No support, RC=Remote Capable)
6-City of Code (CH=Chicago)

## FEATURES



Red Lettering, Single Face



Test Switch & Power Supply Indicator



Ceiling Wall or Side Mount Capable


© Satco Products, Inc. All rights reserved. Rev. 11/26 SN2103

## OPTIONAL ACCESSORIES

| Item | Faceplate Accessories (Compatible with 67-300 to 67-302) | |
|---|---|---|
| 67-320 | Exit Sign Panel Accessory; White Glass Panel; Red EXIT Signage; No Arrows |  |
| 67-321 | Exit Sign Panel Accessory; White Glass Panel; Red EXIT Signage; Right Direction Arrow |  |
| 67-322 | Exit Sign Panel Accessory; White Glass Panel; Red EXIT Signage; Left Direction Arrow |  |
| 67-323 | Exit Sign Panel Accessory; White Glass Panel; Red EXIT Signage; Double Direction Arrow |  |
| 67-324 | Exit Sign Panel Accessory; White Glass Panel; Red STAIR Signage; No Arrows |  |
| 67-325 | Exit Sign Panel Accessory; White Glass Panel; Red STAIR Signage; Right Direction Arrow |  |
| 67-326 | Exit Sign Panel Accessory; White Glass Panel; Red STAIR Signage; Left Direction Arrow |  |
| 67-327 | Exit Sign Panel Accessory; White Glass Panel; Red STAIR Signage; Double Direction Arrow |  |
| 67-330 | Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red EXIT Signage; No Arrows |  |
| 67-331 | Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red EXIT Signage; One Panel Has Right Direction Arrow; The Other Panel Has A Left Direction Arrow |  |
| 67-332 | Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red EXIT Signage; Double Direction Arrows |  |
| 67-333 | Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red STAIR Signage; No Arrows |  |
| 67-334 | Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red STAIR Signage; One Panel Has Right Direction Arrow; The Other Panel Has a Left Direction Arrow |  |
| 67-335 | Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red STAIR Signage; Double Direction Arrows |  |
| **Item** | **Remote Light Head Accessories** (Compatible with 67-301) | |
| 67-395 | Remote Emergency Light; Chicago Approved; White Housing; Single Head; 6 Vdc 1.5 W |  |
| 67-396 | Remote Emergency Light; Chicago Approved; White Housing; Dual Head; 6 Vdc 3.0 W |  |


© Satco Products, Inc. All rights reserved. Rev. 11/26 SN2103

## MOUNTING ACCESSORIES

| Item | Pendant Mounting Accessories (Compatible with 67-300 to 67-302) | Size | Length | Finish | |
|---|---|---|---|---|---|
| 67-900 | Pendant Mounting Kit, Threaded Stem, Round Swivel Canopy Cover | 1/4 IPS | 12″ | White |  |
| 67-901 | Pendant Mounting Kit, Threaded Stem, Round Swivel Canopy Cover | 1/4 IPS | 12″ | Black | |
| 67-902 | Pendant Mounting Kit, Threaded Stem, Round Swivel Canopy Cover | 1/4 IPS | 12″ | Silver | |
| 67-910 | Pendant Extension Kit, Threaded Stem, 1/4 IPS Coupler | 1/4 IPS | 6″ | White |  |
| 67-911 | Pendant Extension Kit, Threaded Stem, 1/4 IPS Coupler | 1/4 IPS | 6″ | Black | |
| 67-912 | Pendant Extension Kit, Threaded Stem, 1/4 IPS Coupler | 1/4 IPS | 6″ | Silver | |
| 67-915 | Pendant Extension Kit, Threaded Stem, 1/4 IPS Coupler | 1/4 IPS | 12″ | White |  |
| 67-916 | Pendant Extension Kit, Threaded Stem, 1/4 IPS Coupler | 1/4 IPS | 12″ | Black | |
| 67-917 | Pendant Extension Kit, Threaded Stem, 1/4 IPS Coupler | 1/4 IPS | 12″ | Silver | |

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Meets requirements of ICES-005 issue 5 class B for use in residential and commercial applications.

Specifications are subject to change without prior notice.

Visit satco.com/service/warranty for complete warranty details.



© Satco Products, Inc. All rights reserved. Rev. 11/26 SN2103