SATCO | NUVO

CFL REPLACEMENT LAMPS

CCT SELECTABLE | UNIVERSAL OPERATION



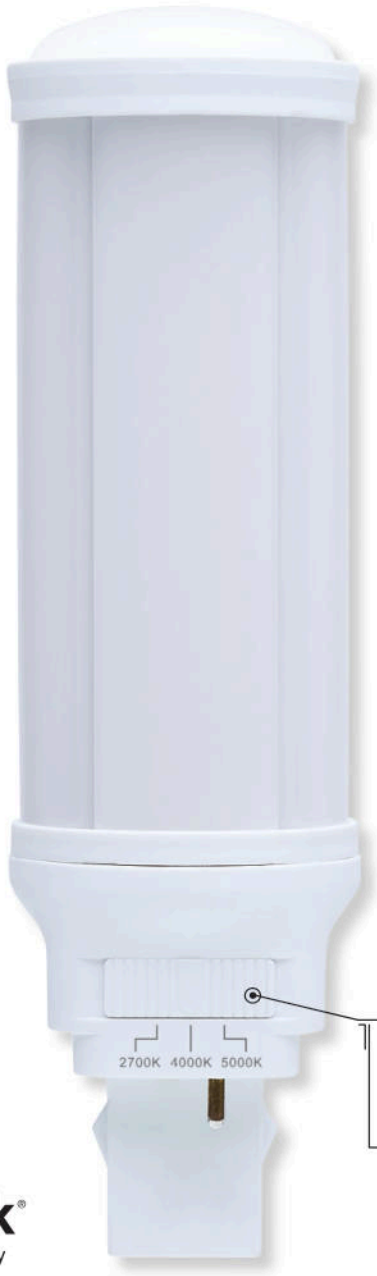

CCT Selectable Switch
2700K–Warm White
4000K–Cool White
5000K–Natural Light

ColorQuick®
Selectable Color Technology

CCT SELECTABLE

TYPE B BALLAST BYPASS

GX32d-2 AND GX32d-3 MODELS

RANGE VOLTAGE 120V-277V

SUGGESTED APPLICATIONS
RETAIL
HOSPITALITY
OFFICE BUILDINGS
SCHOOLS

Upgrade outdated CFLs with SATCO|NUVO's Type B ballast bypass LED replacement lamps—designed for direct-wire installation, eliminating the need for a ballast and reducing maintenance costs. These PL-shaped lamps provide uniform illumination with a wide 320-degree beam angle, while their durable aluminum and plastic construction with a frosted lens ensures smooth, omni-directional lighting. Available in two wattages, the 14W model replaces a traditional 22W CFL, while the 18W model replaces a 28W CFL. Both lamps are CCT selectable, allowing users to choose between warm 2700K, neutral 4000K, or crisp 5000K light to suit various applications. Engineered with a damp location rating and available with GX32d-2 and GX32d-3 bases, these energy-efficient lamps offer a simple, long-lasting upgrade for commercial and residential applications.

CCT SELECTABLE | TYPE B | DAMP LOCATION | 15,000 HOURS | 3 YEAR WARRANTY

SATCO | NUVO

CFL REPLACEMENT LAMPS
CCT SELECTABLE | UNIVERSAL OPERATION

GENERAL SPECIFICATIONS

Range Voltage: 120V-277V
Frequency: 60Hz
Power Factor: >0.9
THD: <20%
Dimming: Non-Dimmable
Surge Protection Rating: 0.5kV
Ballast: Type B - Ballast Bypass
Efficacy: Up to 100 LPW
CRI: 80+
CCT Selectable: 2700K/4000K/5000K

Location Rating: Damp
Ambient Operating Temperature: -20°C (-4°F) to +40C (+104°F)
Rated for Enclosed Fixture: No
Operating Position: Universal
Beam Angle: 320°
Lamp Shape: PL
Material: Aluminum/Plastic
Lens Finish: Frost
Functioning Life: 15,000 Hours
Warranty: 3 Years

ITEM SPECIFICATIONS / ORDER INFO

Item	Watts	Replacement Wattage	Lumens	CCT	Lamp Base	Input Current
S11545	14W	22W	1400	2700K/4000K/5000K	GX32d-2	0.12-0.05A
S11546	18W	28W	1800	2700K/4000K/5000K	GX32d-3	0.15-0.07A

DIMENSIONS / WEIGHTS

Item	MOL (A)	MOD (B)	Weight
S11545	6.30"	1.93"	0.30 Lbs.
S11546	6.89"	1.93"	0.32 Lbs.

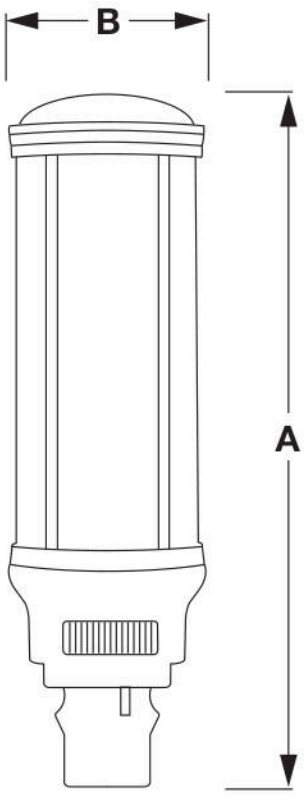

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CAN ICES-005 (A) Meets requirements of ICES-005 issue 5 class A for use in commercial applications.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65.

Please refer to your product packaging for more information.

Replacement wattage shown depends on application and fixture.

Specifications are subject to change without prior notice.

Visit satco.com/service/warranty for complete warranty details.

SATCO.COM | 800-437-2826

© Satco Products, Inc. All rights reserved. SN1809