SATCO

PAR38

TRIPLE FEATURE | ULTRA HIGH OUTPUT





TRIPLE FEATURE

COLOR SELECTABLE
2700/3000/3500
4000/5000K

WATTAGE SELECTABLE
30/25/18W LED

BEAM SELECTABLE
60°/40°/25°

WATTAGE, CCT, AND BEAM SELECTABLE

HIGH OUTPUT ILLUMINATION

REPLACES UP TO 250W INCANDESCENT

DIMMABLE AT 120V

120-277V

SUGGESTED APPLICATIONS
Warehouse
Office
Healthcare
Education

SATCO's PAR38 lamp features innovative Triple Feature technology, allowing users to adjust wattage, color temperature, and beam angle in a single lamp. Delivering the versatility of more than 45 traditional SKUs, it offers three wattage settings, five selectable color temperatures, and three beam angle options to meet a wide range of application needs. This feature-rich lamp also provides ultra-high lumen output, smooth dimming performance, and universal 120-277V operation for maximum installation flexibility.

DIMMABLE | DAMP LOCATION | ENCLOSED FIXTURE | 50,000 HOURS | 5 YEAR WARRANTY

PAR38
TRIPLE FEATURE | ULTRA HIGH OUTPUT

GENERAL SPECIFICATIONS

Input Voltage: 120-277V
Frequency: 50/60Hz
Power Factor: >0.9
Input Current: 0.3A
THD: <20%
Dimmable: Yes-120V Only
Efficacy: Up To 142 LPW
CRI: 80+
Beam Angle Selectable: 25°/40°/**60°**[1]
Wattage Selectable: 18W/25/**30**[1]
Lumens: 3900[2]

CCT Selectable: 2700/3000/3500/**4000**/5000K[1]
Ambient Operating Temperature: -13°F to +113°F (-25°C to +45°C)
Location Rating: Damp
Enclosed Fixture Rating: Yes
Color: White
Operating Position: Universal
Material: Aluminum/Polycarbonate
Base: E26
Functional Life: 50,000 Hours
Warranty: 5 Year

1. Bold text denotes default lamp settings
2. Value shown at default lamp settings

Intertek

ITEM SPECIFICATIONS / ORDER INFO

Item	Description	Shape	Selectable Wattage	Replacement Wattage	Case Quantity
S39761	30SPAR38L/8CCT5/WH/MB/DU	PAR38	30/25/18W	250/200/150W	12

LUMEN VALUES

Item	Wattage	Beam Angle	2700K	3000K	3500K	4000K	5000K
S39761	18	25°	2180	2300	2376	2340	2210
		40°	2360	2480	2560	2520	2390
		60°	2180	2300	2376	2340	2210
	25	25°	3030	3200	3300	3250	3075
		40°	3280	3450	3550	3500	3330
		60°	3030	3200	3300	3250	3075
	30	25°	3630	3840	3960	3900	3690
		40°	3930	4140	4260	4200	3990
		60°	3630	3840	3960	3900	3690

CENTER BEAM CANDLE POWER


Item	Wattage	Beam Angle	2700K	3000K	3500K	4000K	5000K
S39761	18	25°	4100	4350	4400	4350	4100
		40°	3250	3350	3400	3450	3450
		60°	2250	2350	2400	2400	2350
	25	25°	5450	5700	5800	5800	5100
		40°	4400	4500	4600	4700	4500
		60°	2950	3050	3150	3100	2900
	30	25°	6200	6500	6700	6500	5800
		40°	5050	5150	5300	5350	5150
		60°	3300	3500	3600	3550	3250

© Satco Products, Inc. All rights reserved. Rev. 8/26 SN2087

PAR38
TRIPLE FEATURE | ULTRA HIGH OUTPUT

DIMENSIONS / WEIGHT

Item	Diameter (A)	Height (B)	Weight
S39761	5.12"	4.72"	1.26 Lbs

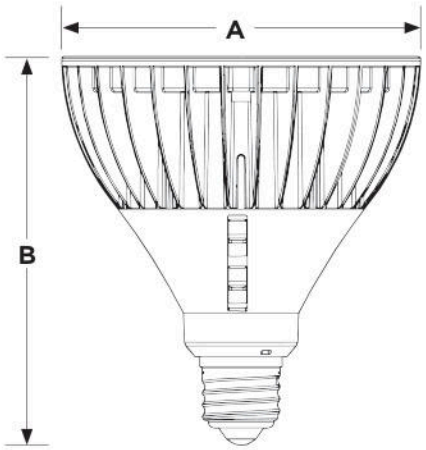

NOMENCLATURE

30SPAR38L/8CCT5/WH/MB/DU

1 2 3 4 5 6 7 8 9

1. Wattage
2. Bulb Shape
3. LED
4. CRI
5. Color Temperature
6. Finish
7. Beam Angle
8. Dimmability
9. Voltage

FEATURES



Selectable Color Temperature Switch



Selectable Beam Angle and Wattage Switches



Polycarbonate Lens

California Proposition 65 Warning: This product can expose you to chemicals including lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Meets requirements of ICES-005 issue 5. Class B – for use in residential or commercial applications.

Not compatible with photo controls, occupancy sensors, or timers.

This device is not intended for use with emergency exits or emergency lighting.

For complete listing of compatible dimmers, visit www.satco.com

SATCO.COM | 800-437-2826

© Satco Products, Inc. All rights reserved. Rev. 8/26 SN2087