
LED Color Selectable Commercial Recessed Downlights with Triac Dimming

Dimensions

A	B	C	Item Number
5"	6.2"	4.5"	DLC4TRICCT/DLC4TRICCT2
6.4"	7.8"	5.6"	DLC6TRICCT/DLC6TRICCT2
7.4"	9.2"	7.3"	DLC8TRICCT/DLC8TRICCT2
8.2"	10.9"	9"	DLC10TRICCT/DLC10TRICCT2
9.5"	13"	11"	DLC12TRICCT/DLC12TRICCT2

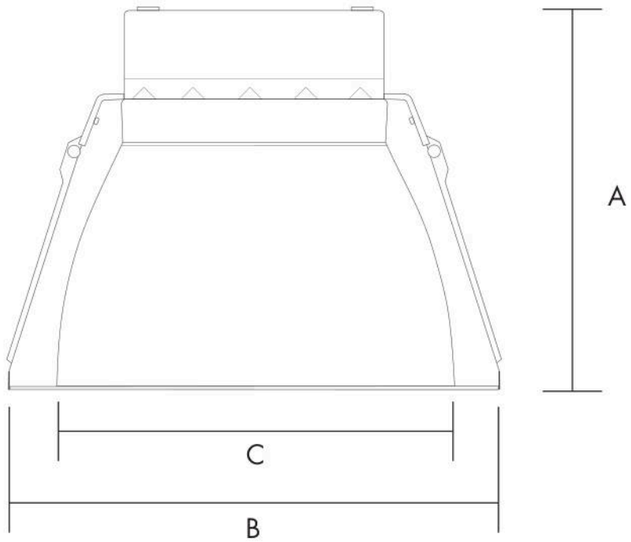

For the most up-to-date specs, please visit www.tcpi.com

TCP®
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com
©TCP MAY 2022/WF332300

ENERGY STAR | c UL us LISTED | RoHS COMPLIANT | 5 YEAR WARRANTY *Based on 12 hours use per day



LED Color Selectable Commercial Recessed Downlights with Triac Dimming

Color Selectable Product Specifications

TCP's Color Selectable Commercial Recessed Downlights offer choices for color temperatures, making these adaptable for many situations.

Reasons to choose LED Color Selectable Commercial Recessed Downlights from TCP

- Selectable colors (30K/35K/41K) or (27K/50K)
- 50,000 hour rated life minimizes replacement and maintenance costs
- Flicker-free design for consistent lighting
- Mounts directly to ceiling: 4, 6, 8, 10 or 12 inch
- Shatter resistant
- Matte silver finish
- Easy installation and integrated trim
- Snap clips allow for installation without a recessed can
- 85° beam angle (4"/6"/8"/10")
- 70° beam angle (12")
- Smooth, uniform triac dimming

Ideal Applications

- Commercial
- Retail
- Industrial
- Healthcare

Specifications

Color Temperatures.....(30K/35K/41K) or (27K/30K)
Wattages.....12W, 15W, 19W or 30W
Input Line Voltage 120V
Input Line Frequency.....50/60HZ
Dimming.....Triac

Lamp Life (rated)..... 50,000 hours
Minimum Starting Temp ..... -22°F/-30°C
Maximum Operating Temp..... 104°F/40°C
CRI..... 80

IC rated for direct contact with insulation

UL approved for damp locations

TCP®
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com

ENERGY STAR | c UL us LISTED | RoHS COMPLIANT | 5 YEAR WARRANTY *Based on 12 hours use per day

Specifications



Color Selectable Commercial Recessed Downlights (30K,35K,41K)

ITEM #	DESCRIPTION	VOLTAGE	INCAND. WATTS	WATTAGE	LUMENS 30K	LUMENS 35K	LUMENS 41K	LPW	CRI
4" Color Selectable Commercial Recessed Downlight – 65 Watt Replacement • 50,000 Hour									
DLC4TRICCT	LED 4" Comm Downlight CCT	120	65	12	1150	1200	1190	95.8/100/99	80
6" Color Selectable Commercial Recessed Downlight – 85 Watt Replacement • 50,000 Hour									
DLC6TRICCT	LED 6" Comm Downlight CCT	120	85	15	1430	1530	1515	95/102/101	80
8" Color Selectable Commercial Recessed Downlight – 85 Watt Replacement • 50,000 Hour									
DLC8TRICCT	LED 8" Comm Downlight CCT	120	85	19	2085	2150	2085	110/113.2/110	80
10" Color Selectable Commercial Recessed Downlight – 100 Watt Replacement • 50,000 Hour									
DLC10TRICCT	LED 10" Comm Downlight CCT	120	100	30	3205	3330	3305	106.8/111/110.2	80
12" Color Selectable Commercial Recessed Downlight – 125 Watt Replacement • 50,000 Hour									
DLC12TRICCT	LED 12" Comm Downlight CCT	120	125	30	3260	3380	3360	108.7/112.7/112	80

TCP®
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com

ENERGY STAR | c UL us LISTED | RoHS COMPLIANT | 5 YEAR WARRANTY *Based on 12 hours use per day

LED Color Selectable Commercial Recessed Downlights with Triac Dimming

Specifications

Color Selectable Commercial Recessed Downlights (27K,50K)

ITEM #	DESCRIPTION	VOLTAGE	INCAND. WATTS	WATTAGE	LUMENS 27K	LUMENS 50K	LPW	CRI
4" Selectable Commercial Recessed Downlight – 65 Watt Replacement • 50,000 Hour								
DLC4TRICCT2	LED 4" Comm Downlight Diffuser CCT	120	65	12	1200	1300	100/108.3	80
6" Selectable Commercial Recessed Downlight – 85 Watt Replacement • 50,000 Hour								
DLC6TRICCT2	LED 6" Comm Downlight Diffuser CCT	120	85	15	1450	1500	96.7/100	80
8" Selectable Commercial Recessed Downlight – 85 Watt Replacement • 50,000 Hour								
DDLC8TRICCT2	LED 8" Comm Downlight Diffuser CCT	120	85	19	2000	2050	105.3/107.9	80
10" Selectable Commercial Recessed Downlight – 100 Watt Replacement • 50,000 Hour								
DLC10TRICCT2	LED 10" Comm Downlight Diffuser CCT	120	100	30	2850	2950	95/98.3	80
12" Selectable Commercial Recessed Downlight – 125 Watt Replacement • 50,000 Hour								
DLC12TRICCT2	LED 12" Comm Downlight Diffuser CCT	120	125	30	2850	2950	95/98.3	80

TCP®
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com

ENERGY STAR | c UL us LISTED | RoHS COMPLIANT | 5 YEAR WARRANTY *Based on 12 hours use per day