TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For over 20 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market - that transforms your surroundings and envelopes you in warmth - lighting that generates beauty with every flip of the switch.

For more information on the quality and care TCP can deliver, call us at 800.324.1496 or visit tcpi.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516

SELECT SERIES by TCP

LED Retrofit Flat Panel

Product Specifications



TCP's LED Flat Panel Troffer Retrofit Kit offers a high-efficiency alternative to T5, T8, and T12 linear fluorescent systems. It provides long-life with consistent color and superior lumen maintenance. The rugged, cold-rolled steel housing is post-painted with a matte white finish. The acrylic diffuser provides a low-glare, wide-light distribution.

The LED Flat Panel Troffer Retrofit Kit offers a cost-effective solution to maximize savings and take advantage of potential utility rebates without sacrificing performance.

Reasons to choose the LED Flat Panel Troffer Retrofit Kit from TCP

- Uses up to 61% less energy than fluorescent alternatives
- Long 50,000 hour rated life
- Excellent color consistency and CRI
- Mercury free
- Frosted acrylic diffuser
- Slim, low-profile design

Ideal Applications

- Offices
- Retail Stores
- Schools
- Hospitality
- Restaurants
- Healthcare

TCP®
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com

c UL US LISTED

5 YEAR WARRANTY

Not all versions of this product are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/qpl.

LED Retrofit Flat Panel

Specifications

Input Line Voltage 120-277V
Input Line (Hz) 50/60Hz
Wattage (W)
- 1x4
  - SW2 ..... 32W/26W/18W/15W
- 2x2
  - SW2 ..... 32W/26W/18W/15W
- 2x4
  - SW3 ..... 36W/26W/22W/18W

Lumens (L)
- 1x4
  - SW2 ..... 4600L/3800L/2800L/2200L
- 2x2
  - SW2 ..... 4600L/3800L/2800L/2200L
- 2x4
  - SW3 ..... 5200L/3800L/3200L/2800L

Lumens Per Watt (LPW) ..... >150LPW
Rated Life ..... 50,000 hours
Minimum Starting Temperature ..... -20°C
Maximum Operating Temperature ..... 50°C
CRI ..... >80
Power Factor ..... >90%
THD ..... <20%
Ratings ..... UL/cUL damp location rated, IC Rated
Controls ..... 0-10V dimming (standard)



Replacement Strategy

SYSTEM	BALLAST FACTOR	LUMENS	INPUT WATTS*	LED ENERGY SAVINGS
TCP LED Flat Panel Troffer - 2x2	**–**	**4600**	**32**	**–**
2 Lamp 34W T12 U-Bend	0.88	4420	74	59%
2 Lamp 32W T8 U-Bend	0.88	4275	58	48%
2 Lamp 24W T5HO	1.0	3145	54	44%
TCP LED Flat Panel Troffer - 2x4	**–**	**5200**	**36**	**–**
3 Lamp 32W T8 HBF	1.18	6960	93	63%
3 Lamp 32W T8 NBF	0.88	6681	89	60%
2 Lamp 32W T8 HBF	1.18	4658	65	45%
2 Lamp 28W T5	1.0	4675	63	43%
2 Lamp 32W T8 NBF	0.88	4468	59	39%

*Actual wattage may differ by +/- 5%, when operating between 120-277V +/- 10%.

NOTE: Charts show system lumens (delivered lumens), NOT straight lamp lumen output. This is calculated as follows:
System lumens = mean lumens x # lamps x ballast factor x luminaire efficiency factor

TCP®
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com

c UL US LISTED 5 YEAR WARRANTY

Not all versions of this product are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/qpl.

2x4 LED Retrofit Flat Panel

Applications

The TCP LED Flat Panel Troffer Retrofit Kit is a high-efficiency alternative to T5, T8, and T12 linear fluorescent troffers. Their intelligent high-performance LED light engines and drivers deliver long-life, consistent color, and superior lumen maintenance. Applications include offices, schools, retail and hospital locations.

Construction

The TCP LED Flat Panel Troffer Retrofit Kit is constructed of rugged cold-rolled steel, post-painted with a matte white finish, and an acrylic diffuser.

Electrical

All electrical components are cULus listed. TCP high-efficiency drivers provide consistent power to ensure even lighting from the long-life LEDs. Each driver is wattage selectable and is paired with a high-quality LED light engine to deliver long-life and high-quality light. Full range 0-10V dimming is optional.

Optics

The acrylic diffuser conceals the LEDs while providing a highly-diffused, low-glare light. The smooth white reflector integrates into the diffuser creating soft illumination while distributing the light evenly in a wide pattern.

Item Number	
Notes	Type

Listings
UL/cUL Listed
RoHS Compliant
IC Rated
DLC 6.0 RoHS Compliant

Lumen Maintenance
L90> 36,000 hours

Warranty
Five year limited warranty against defects in manufacturing.


Catalog Ordering Matrix

Example: FRK4UZDSW35CCT

FAMILY	SIZE	VOLTAGE	DIMMING	WATTAGE (LUMEN PACKAGE)[1,2]	COLOR TEMPERATURE
FRK = Flat Panel Retrofit Kit	**4** = 2' x 4'	**U** = 120V-277V	**ZD** = 0-10V Dimming	**SW3** = 36W/26W/22W/18W Selectable (5200L/3800L/3200L/2800L)	**5CCT** = 30K/35K/41K/50K/65K

[1] Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.
[2] Actual wattage may differ by +/- 5%; when operating between 120-277V +/- 10%.

Dimensions

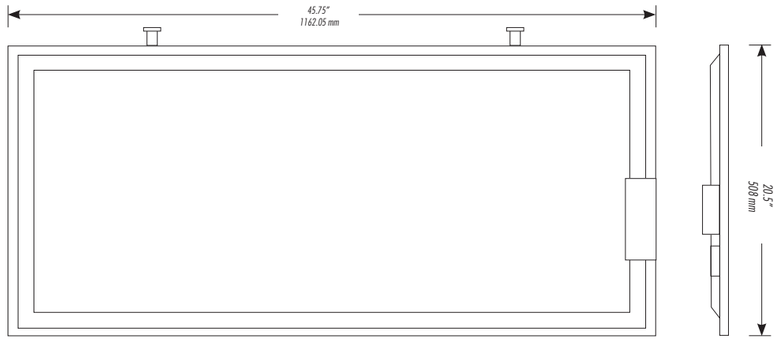

For the most up-to-date specs and warranty information, please visit www.tcpi.com

TCP®
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com
©TCP MAR 2026/WF575200

c UL US LISTED 5 YEAR WARRANTY

Not all versions of this product are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/qpl.

1x4 LED Retrofit Flat Panel

Applications

The TCP LED Flat Panel Troffer Retrofit Kit is a high-efficiency alternative to T5, T8, and T12 linear fluorescent troffers. Their intelligent high-performance LED light engines and drivers deliver long-life, consistent color, and superior lumen maintenance. Applications include offices, schools, retail and hospital locations.

Construction

The TCP LED Flat Panel Troffer Retrofit Kit is constructed of rugged cold-rolled steel, post-painted with a matte white finish, and an acrylic diffuser.

Electrical

All electrical components are cULus listed. TCP high-efficiency drivers provide consistent power to ensure even lighting from the long-life LEDs. Each driver is wattage selectable and is paired with a high-quality LED light engine to deliver long-life and high-quality light. Full range 0-10V dimming is optional.

Optics

The acrylic diffuser conceals the LEDs while providing a highly-diffused, low-glare light. The smooth white reflector integrates into the diffuser creating soft illumination while distributing the light evenly in a wide pattern.

Item Number	
Notes	Type

Listings
UL/cUL Listed
RoHS Compliant
IC Rated
DLC 6.0 RoHS Compliant

Lumen Maintenance
L90> 36,000 hours

Warranty
Five year limited warranty against defects in manufacturing.


Catalog Ordering Matrix

Example: FRK1UZDSW25CCT

FAMILY	SIZE	VOLTAGE	DIMMING	WATTAGE (LUMEN PACKAGE)[1,2]	COLOR TEMPERATURE
FRK = Flat Panel Retrofit Kit	**1** = 1′ x 4′	**U** = 120V-277V	**ZD** = 0-10V Dimming	**SW2** = 32W/26W/18W/15W Selectable (4600L/3800L/2800L/2200L)	**5CCT** = 30K/35K/41K/50K/65K

[1] Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.
[2] Actual wattage may differ by +/- 5%; when operating between 120-277V +/- 10%.

Dimensions

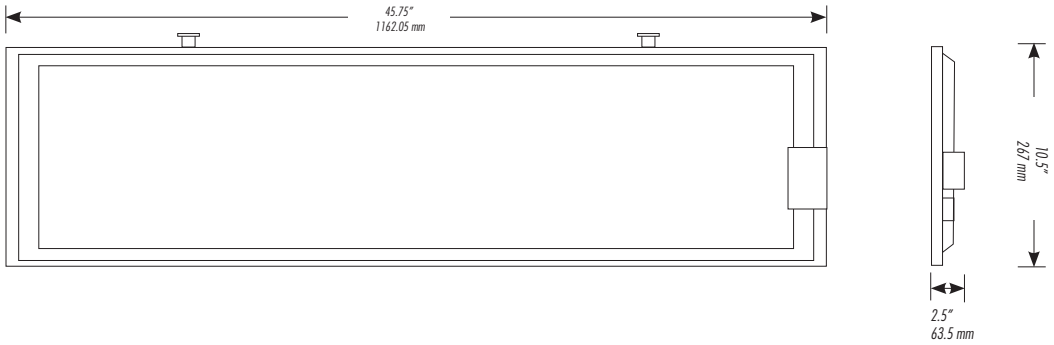

For the most up-to-date specs and warranty information, please visit www.tcpi.com

TCP®
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com

c UL us LISTED

5 YEAR WARRANTY

Not all versions of this product are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/qpl.

2x2 LED Retrofit Flat Panel

Applications

The TCP LED Flat Panel Troffer Retrofit Kit is a high-efficiency alternative to T5, T8, and T12 linear fluorescent troffers. Their intelligent high-performance LED light engines and drivers deliver long-life, consistent color, and superior lumen maintenance. Applications include offices, schools, retail and hospital locations.

Construction

The TCP LED Flat Panel Troffer Retrofit Kit is constructed of rugged cold-rolled steel, post-painted with a matte white finish, and an acrylic diffuser.

Electrical

All electrical components are cULus listed. TCP high-efficiency drivers provide consistent power to ensure even lighting from the long-life LEDs. Each driver is wattage selectable and is paired with a high-quality LED light engine to deliver long-life and high-quality light. Full range 0-10V dimming is optional.

Optics

The acrylic diffuser conceals the LEDs while providing a highly-diffused, low-glare light. The smooth white reflector integrates into the diffuser creating soft illumination while distributing the light evenly in a wide pattern.

Item Number	
Notes	Type

Listings
UL/cUL Listed
RoHS Compliant
IC Rated
DLC 6.0 RoHS Compliant

Lumen Maintenance
L90> 36,000 hours

Warranty
Five year limited warranty against defects in manufacturing.


Catalog Ordering Matrix


Example: FRK2UZDSW25CCT

FAMILY	SIZE	VOLTAGE	DIMMING	WATTAGE (LUMEN PACKAGE)[1,2]	COLOR TEMPERATURE
FRK = Flat Panel Retrofit Kit	**2** = 2′ x 2′	**U** = 120V-277V	**ZD** = 0-10V Dimming	**SW2** = 32W/26W/18W/15W Selectable (4600L/3800L/2800L/2200L)	**5CCT** = 30K/35K/41K/50K/65K

[1] Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.
[2] Actual wattage may differ by +/- 5%; when operating between 120-277V +/- 10%.

Dimensions

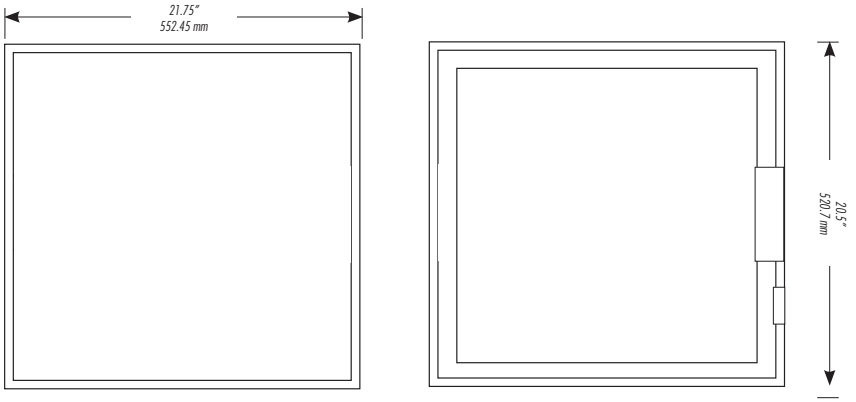

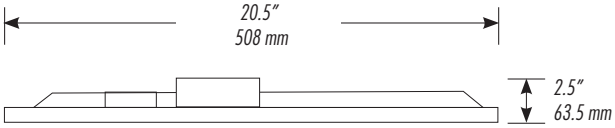

For the most up-to-date specs and warranty information, please visit www.tcpi.com

TCP®
325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com

c UL us LISTED

5 YEAR WARRANTY

Not all versions of this product are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/qpl.