

Selectable LED Stairwell Light

Wattages: 35W / 45W / 55W



WATT/CCT
SELECTABLE

The Selectable LED Stairwell Light Adopt Sheet metal stamping and Frosted PC lens Long lasting white with high durability, Be widely Used in commercial and retail applications. Ideal for use in stairwells, corridors, and hallways.



FEATURES

- Made of high quality ABS material, high ignition point, more safe.
- Frosted PC lens.
- Fixed or Field-adjustable Power and CCT.
- Driver includes dimming control wiring for 0-10V dimming systems.
- 12Vdc auxiliary.

WATT/CCT
FIELD-ADJUSTABLE

Simply select desired CCT and Wattage before installation





SPECIFICATION	
TYPE	LSW4F35455W27-3545K-M
WATTAGE	35W/45W/55W
LUMEN	4200 lm / 5400 lm / 6600 lm
EFFICACY	≥ 120 lm/W
CCT	3500K/4000K/5000K
CRI	80
INPUT VOLTAGE	AC120-277V
LIGHT ANGLE	119°
POWER FACTOR	0.95
DRIVER EFFICACY	86%
FACTORY SETTINGS	55W & 4000K PIR Sensor As Standard
WORKING TEMPERATURE	-40°F ~ 104°F
LIFESPAN (L70)	100000 hours
PROTECTION LEVEL	Damp locations
CABLE	None
WARRANTY	5 year limited

Selectable LED Stairwell Light

Wattages: 35W / 45W / 55W

DIMENSION

Unit: inch(mm)

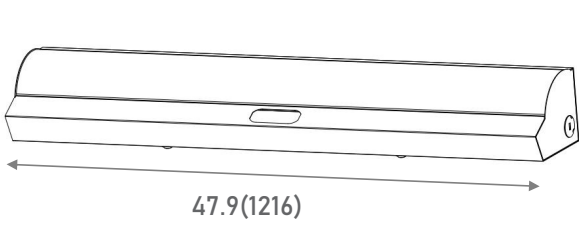

WATTAGE	35W/45W/55W
NET WEIGHT	2.20KG(4.85lbs)
BOX DIM.	48.54"x4.33"x3.85"(1pcs/CTN)
	49.05"x9.13"x8.14" (4pcs/CTN)

EMERGENCY BACK-UP (SOLD SEPARATELY)



EMS8W27-XX
8W Emergency Backup Battery LED Driver

EMS15W27-XX
15W Emergency Backup Battery LED Driver

EMS20W27-XX
20W Emergency Backup Battery LED Driver

CONTROL (STANDARD)



ANT-15P
PIR sensor

CONTROL (SOLD SEPARATELY)



RC-100
Microwave Sensor Remote Controller

ORDERING INFORMATION

EXAMPLE:





LSW4F35455W27-3545K-E[Blank,M]

LBS	LSW	4F	35455W	27	3545K	E
COMPANY	PRODUCT	SIZE	WATTAGE	VOLTAGE	CCT	CONTROL
LBS	LSW (LED Stairwell Light)	4F (4-feet)	35455W - (35W/45W/55W)	27 - (120-277V)	3545K - (3500K/4000K/5000K)	M - (Motion Sensor)

PHOTOMETRICS

For complete IES files, please visit our website.

LSW4F35455W27-3545K (55W&3500K)

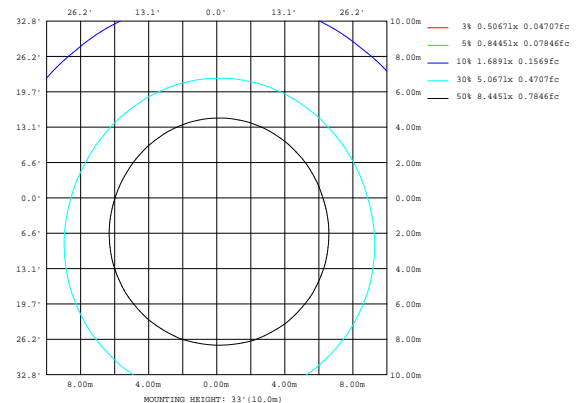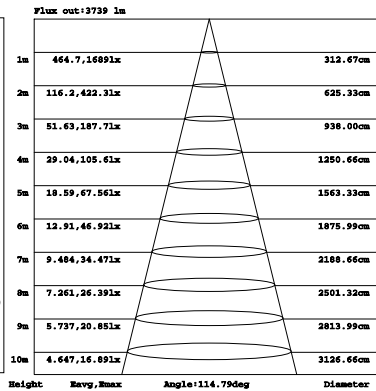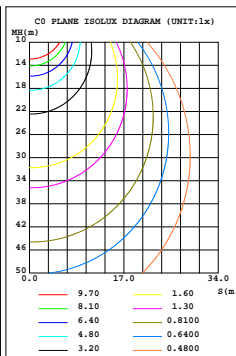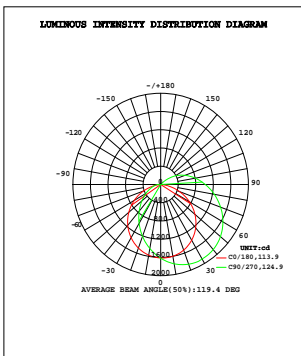



Selectable LED Stairwell Light

Wattages: 35W / 45W / 55W

PHOTOMETRICS


For complete IES files, please visit our website.

LSW4F35455W27-3545K (55W&4000K)

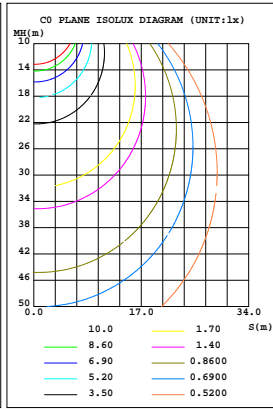
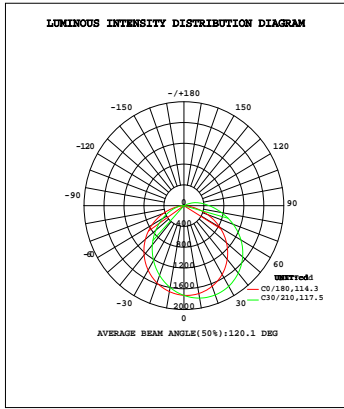


Flux out: 3994 lm

Height	Evgs, Emax	Angle: 115.29deg	Diameter
1m	496.4, 18041lx		315.69cm
2m	124.1, 451.11lx		631.38cm
3m	55.15, 200.51lx		947.08cm
4m	31.02, 112.81lx		1262.77cm
5m	19.86, 72.171lx		1578.46cm
6m	13.79, 50.121lx		1894.15cm
7m	10.13, 36.821lx		2209.84cm
8m	7.756, 28.191lx		2525.54cm
9m	6.128, 22.271lx		2841.23cm
10m	4.964, 18.041lx		3156.92cm

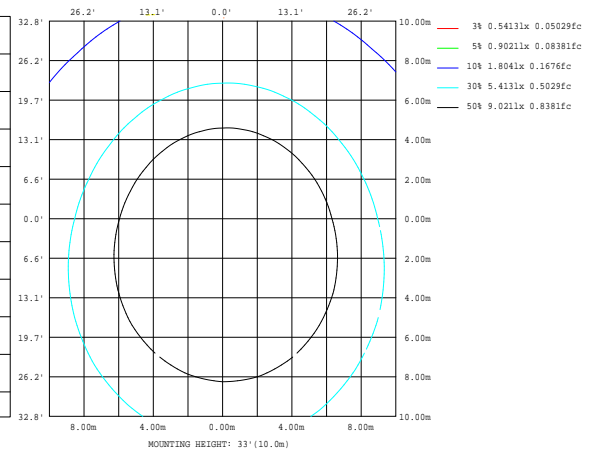

LSW4F35455W27-3545K (55W&5000K)

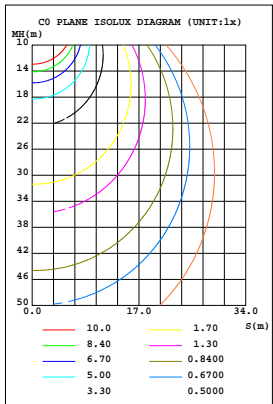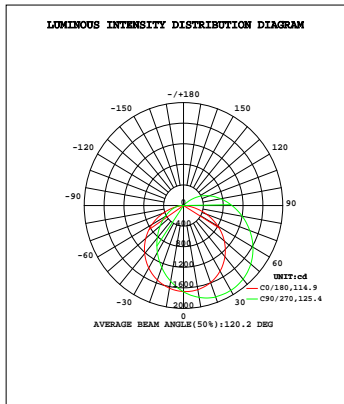

Flux out: 3864 lm

Height	Evgs, Emax	Angle: 115.45deg	Diameter
1m	480.2, 17371lx		316.67cm
2m	120.1, 434.21lx		633.34cm
3m	53.36, 193.01lx		950.01cm
4m	30.01, 108.61lx		1266.67cm
5m	19.21, 69.481lx		1583.34cm
6m	13.24, 48.251lx		1900.01cm
7m	9.801, 35.451lx		2216.68cm
8m	7.504, 27.141lx		2533.35cm
9m	5.923, 21.441lx		2850.02cm
10m	4.802, 17.371lx		3166.69cm

