
Flexable Conduit

WSD LED INC
Green Lighting Resources


Model: PRWG-1/2,PRWA-1/2,PULG1-1/2,PULG1-3/4



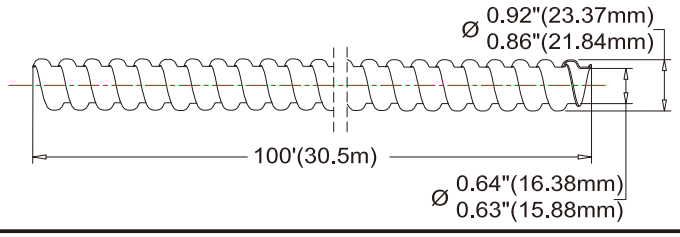

Metal Flexable Conduit


NO.PRWG-1/2
Material:Metal
Protection Level:IP40
Bending Radius:75mm
USE:1/2-inch high strength metal alloy construction provides mechanical protection for conductors and cable for use with listed connectors intended for NEC Type FMC Smooth interior for easy wire pulling Superor corrosion resistance and built in flexibility for simplified positioning

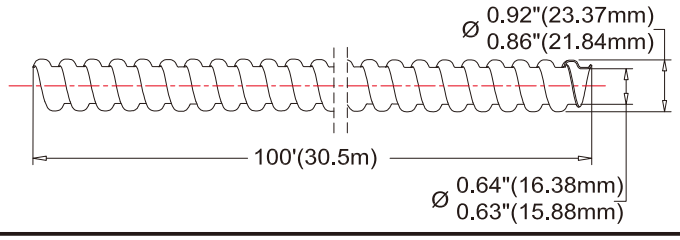




Aluminum Flexable Conduit


NO.PRWA-1/2
Material:Aluminum
Protection Level:IP40
Bending Radius:75mm
USE:1/2-inch high strength metal alloy construction provides mechanical protection for conductors and cable for use with listed connectors intended for NEC Type FMC (Flexible Metal Conduit) Cuts 80-Percent faster than steel and is 6-Percent lighter than steel Smooth interior for easy wire pulling Superor corrosion resistance and built in flexibility for simplified positioning

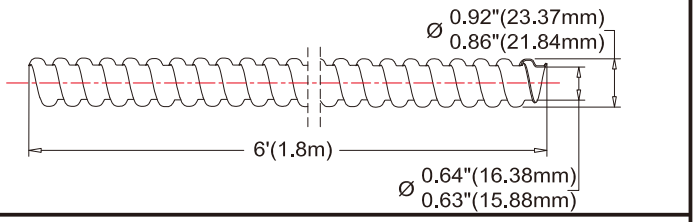


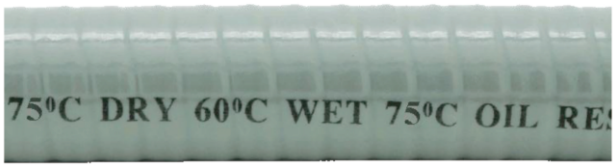

Metal Flexable Conduit

NO.PULG1-1/2
Material:Metal
Protection Level:IP40
Bending Radius:92.55mm
USE:1/2-inch high strength metal alloy construction provides mechanical protection for conductors and cable for use with listed connectors intended for NEC Type FMC Smooth interior for easy wire pulling Superor corrosion resistance and built in flexibility for simplified positioning

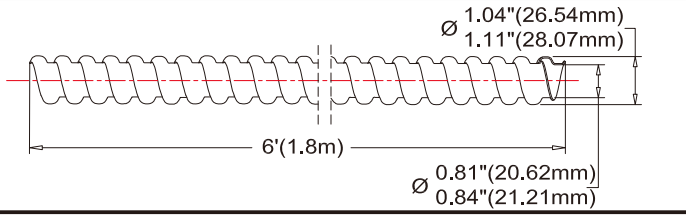

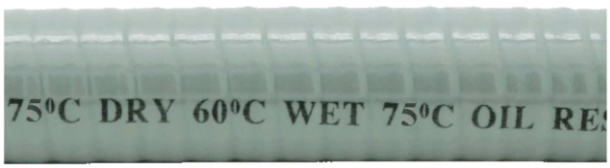

Metal Flexable Conduit

NO.PULG1-3/4
Material:Metal
Protection Level:IP40
Bending Radius:117.95mm
USE:3/4-inch high strength metal alloy construction provides mechanical protection for conductors and cable for use with listed connectors intended for NEC Type FMC Smooth interior for easy wire pulling Superor corrosion resistance and built in flexibility for simplified positioning


Flexable Conduit Mountings

WSD LED INC
Green Lighting Resources

Model: S172-1/2,S222-1/2,S132-1/2,S502-1/2,S532-1/2,S503-3/4,S533-3/4




NO.S502-1/2





NO.S532-1/2




Metal Flexable Conduit Mounting

NO.S502-1/2,S532-1/2
Material:Metal
Protection Level:IP68
USE: For PULG1 -1/2 assembly, can be assembled into a line tube kit.




NO.S503-3/4





NO.S533-3/4




Metal Flexable Conduit Mounting

NO.S503-3/4,S533-3/4
Material:Metal
Protection Level:IP68
USE: For PULG1 -3/4 assembly, can be assembled into a line tube kit.




NO.S172-1/2





NO.S222-1/2



Aluminum Flexable Conduit

NO.S172-1/2,S222-1/2,S132-1/2
Material:Metal
Protection Level:IP40
USE:For PRWG-1/2 and PRWA-1/2 assembly, can be assembled into a line tube kit.



NO.S132-1/2

