
LED Selectable Strip Linear Light

WSD LED INC
Green Lighting Resources

Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W ; (8FT)65W/75W/91W

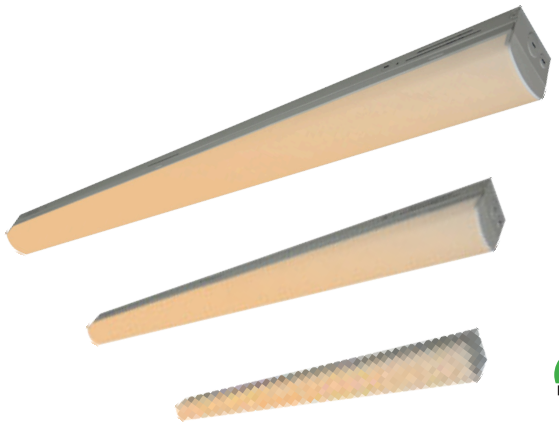

The Selectable Strip Linear Light can be widely used for indoor (damp locations) Excellent for hospitals,schools,shops,restaurants,storage rooms, supermarkets, etc.

UL CERTIFIED E354939 · DLC PREMIUM · 5 YEAR LIMITED WARRANTY · CCT Selectable · POWER Selectable

FEATURES

- Luminous part is integrated and fastened to fixture body by snap-locks.
- End-caps adopt integrated bending technique.
- Field-adjustable light output and CCT.
- Lens made of acrylic material (PMMA).
- 12Vdc auxiliary dimming
- Motion sensor control available (Optional)

WATT/CCT
FIELD-ADJUSTABLE

Simply select desired CCT and Wattage before installation





Buckle design,Convenient disassembly and assembly

SPECIFICATION				
TYPE	WSD-ST2FT152025W27-3545K	WSD-ST4FT253040W27-3545K	WSD-ST8FT556065W27-3545K	WSD-ST8FT657591W27-3545K
WATTAGE	(2FT) 15W/20W/25W	(4FT) 25W/30W/40W	(8FT) 55W/60W/65W	(8FT) 65W/75W/91W
LUMEN	2285 lm/3077lm/3719lm	3806 lm/4653lm/6100lm	8595 lm/9190 lm/9677 lm	10380 lm/11978 lm/13409 lm
EFFICACY	≥130 lm/W			
CCT	3500K/4000K/5000K			
DEFAULT SETTING	25W&4000K	40W&4000K	65W&4000K	91W&4000K
CRI	80			
INPUT VOLTAGE	AC120-277V			
LIGHT ANGLE	112°			
POWER FACTOR	0.90			
DRIVER EFFICACY	86%			
DIMMING	0-10V Dimming			
WORKING TEMPERATURE	-4°F ~ 122°F			
LIFESPAN (L70)	100,000 hours			
PROTECTION LEVEL	Damp locations			
CABLE	NO CABLE			
WARRANTY	5 year limited			


LED Selectable Strip Linear Light

WSD LED INC
Green Lighting Resources

Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W ; (8FT)65W/75W/91W

DIMENSION

Unit:mm/inch

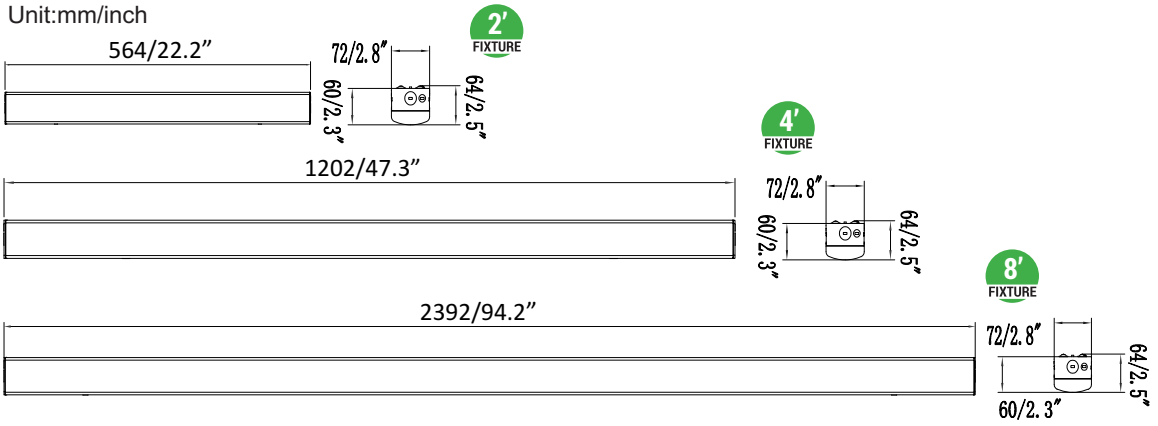

WATTAGE	15W/20W/25W
GR. WEIGHT	2.65 lbs (6 pcs/carton)
BOX DIM.	25.63" x 9.84" x 5.98"

WATTAGE	25W/30W/40W
GR. WEIGHT	4.41 lbs (6 pcs/carton)
BOX DIM.	50.59" x 9.84" x 5.98"

WATTAGE	55W/60W/65W/75W/91W
GR. WEIGHT	8.49 lbs (4 pcs/carton)
BOX DIM.	98.03" x 6.89" x 5.91"

EMERGENCY BACK-UP (SOLD SEPARATELY)



WSD-EMS8W27-XX
8W Emergency Backup Battery
LED Driver

WSD-EMS15W27-XX
15W Emergency Backup Battery
LED Driver

WSD-EMS20W27-XX
20W Emergency Backup Battery
LED Driver

CONTROL (SOLD SEPARATELY)



NLC-MW-SQ-005
Microwave Motion Sensor



Bluetooth
NLC-MW-SQ-BLD-GE
Bluetooth Microwave Sensor
For GEBC Systems



RC-100
Microwave Sensor
Remote Controller

STANDARD ACCESSORIES(Standard)



1.2M CABLE
(2FT,4FT,8FT)



J-BOX COVER
(2FT,4FT,8FT)




V-HOOK
(2FT,4FT,8FT)

STANDARD ACCESSORIES(Sold Separately)



WSD-ST-SMA
Surface Mount Accessories
for Strip lights
(2FT,4FT,8FT)



WSD-ST-CROSS PIECE
Strip Light Connection
Piece
(2FT,4FT,8FT)



WSD-ST-WG-2FT
WSD-ST-WG-4FT
WIRE GUARD
8FT Strip Light :
WSD-ST-WG-4FT(2PCS)

ORDERING INFORMATION

EXAMPLE:

WSD-ST2FT152025W27-3545K-E[Blank,M] / WSD-ST4FT253040W27-3545K-E[Blank,M] / WSD-ST8FT556065W27-3545K-E[Blank,M]

WSD	ST	2FT	152025	27	3545K	E
PRODUCT	PRODUCT	SIZE	WATTAGE	VOLTAGE	CCT	CONTROL
WSD (WSD LED INC)	**ST** (Strip Linear Light)	**2FT** (2-foot) **4FT** (4-foot) **8FT** (8-foot)	**152025W -** (15W/20W/25W) **253040W -** (25W/30W/40W) **556065W -** (55W/60W/65W) **657591W -** (65W/75W/91W)	**27 -** (120-277V)	**3545K -** (3500K/4000K/5000K)	**M**(Motion Sensor)

LED Selectable Strip Linear Light


WSD LED INC
Green Lighting Resources


Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W ; (8FT)65W/75W/91W


PHOTOMETRICS


For complete IES files, please visit our website.

WSD-ST4FT253040W27-3545K (40W&3500K)

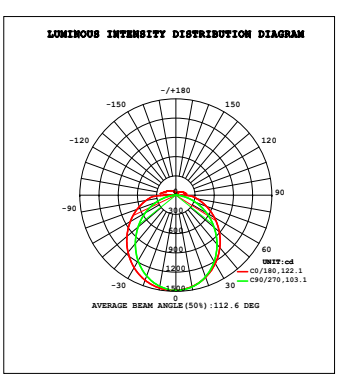


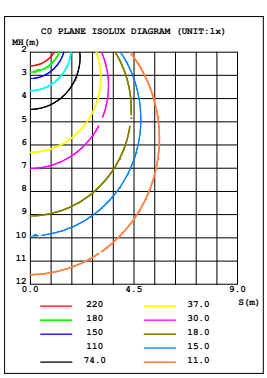


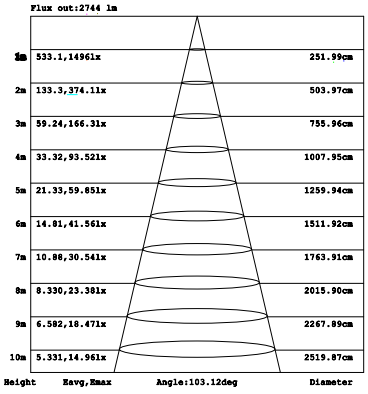


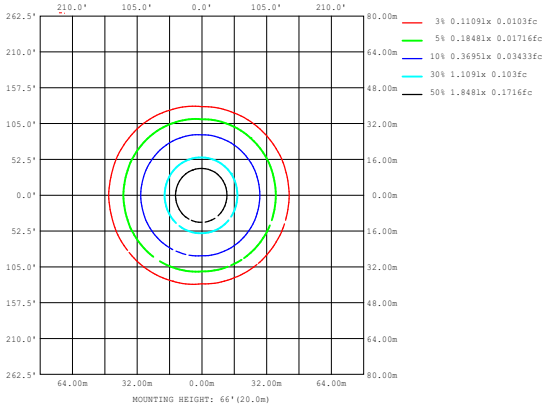


WSD-ST4FT253040W27-3545K (40W&4000K)

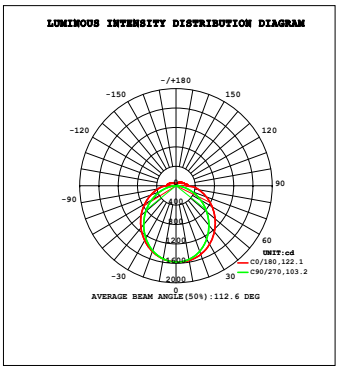


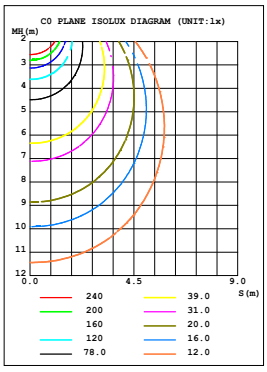


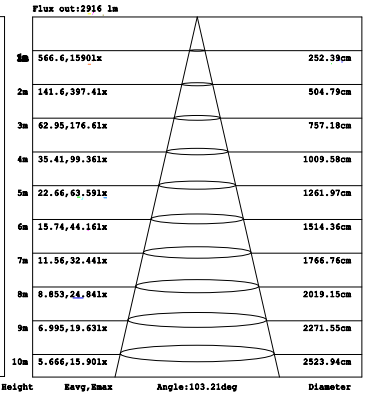


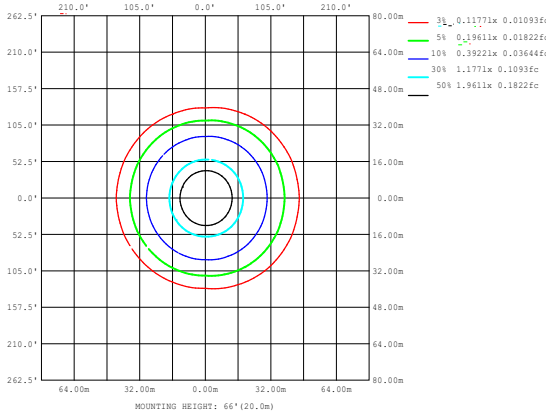


WSD-ST4FT253040W27-3545K (40W&5000K)

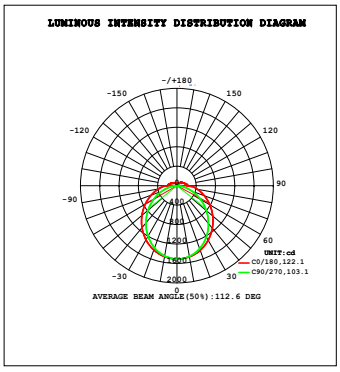

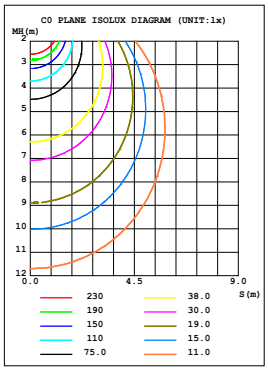

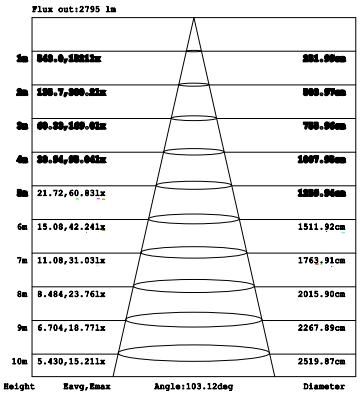

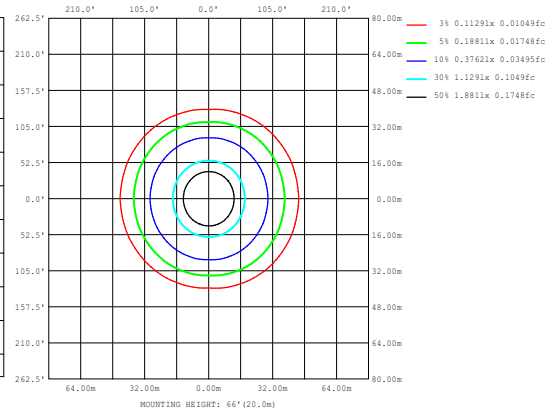

LED Selectable Strip Linear Light


WSD LED INC
Green Lighting Resources


Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W


PHOTOMETRICS


For complete IES files, please visit our website.

WSD-ST8FT556065W27-3545K (65W&3500K)

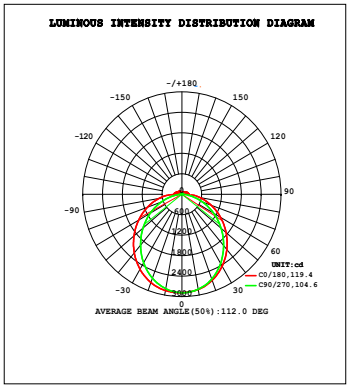


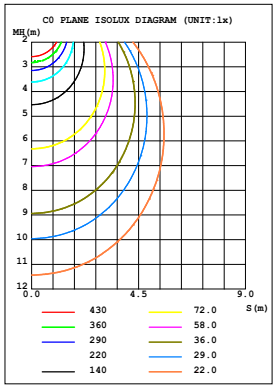


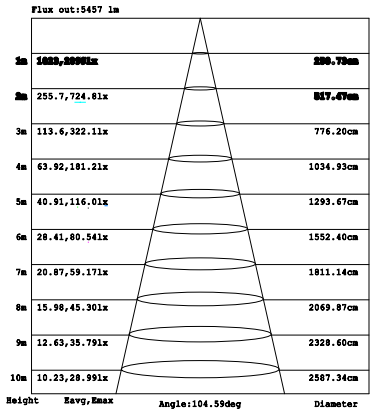


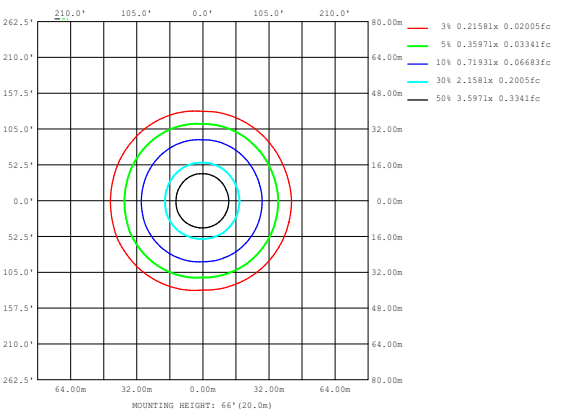


WSD-ST8FT556065W27-3545K (65W&4000K)

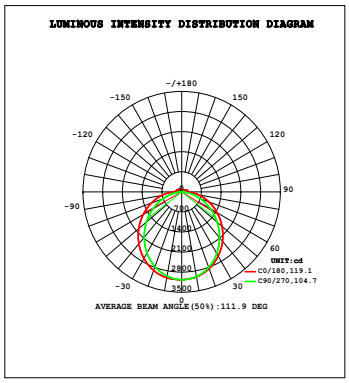

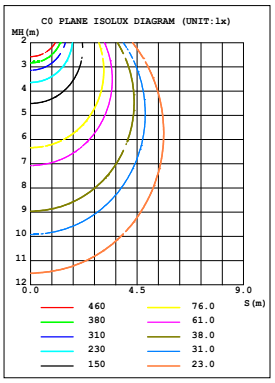

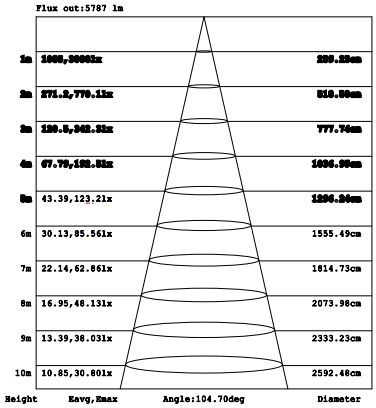

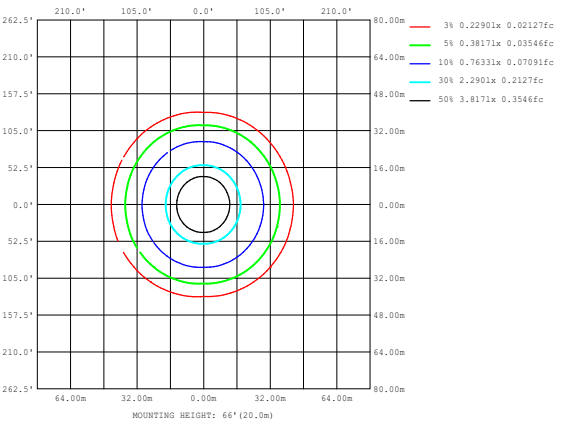

WSD-ST8FT556065W27-3545K (65W&5000K)

