Selectable LED Glass Wall Pack light

WSD LED INC
Green Lighting Resources

Wattages: 28W,42W,56W,70W;48W,72W,96W,120W



WATT/CCT SELECTABLE

The Selectable LED Glass Wall Pack Lighting Series can be widely used for Indoor or Outdoor (Wet Location) Excellent for Museums,Art Galleries, Shopping Malls, Office Buildings, Walls and many other applications.

Features:

- Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V.
- Die Cast aluminium cooling design,high quality and better cooling for LED Tj < 85℃.
- Excellent Optics design, greatly improve the light utilization and evenness.
- The 1-10V Dimming type is continuous.

Packaging information:

❖**WSD-GWP2842567W27-345K-D-P-G2:**

❖**WSD-GWP48729612W27-345K-D-P-G2:**

Carton Size:380MM X 285MM X 220MM (1Pcs/CTN)

(14.96″ X11.22″ X8.66″)


SPECIFICATION								
TYPE	WSD-GWP2842567W27-345K-D-P-G2				WSD-GWP48729612W27-345K-D-P-G2			
WATTAGE	28W	42W	56W	70W	48W	72W	96W	120W
LUMEN	4800 lm	6393 lm	7880 lm	9808 lm	6990 lm	10447 lm	13422 lm	16767 lm
EFFICACY	> 150 lm/W							
CCT	3000K,4000K,5000K							
CRI	> 70							
INPUT VOLTAGE	AC120-277V							
LIGHTING ANGLE	96.2X110.5°				99.5X105.4°			
FACTORY SETTINGS	70W & 4000K				120W & 4000K			
LED TYPE	2835							
PF	> 0.95							
DRIVER EFFICIENCY	> 89%							
PROTECTION LEVEL	WET							
WORKING TEMPERATURE	-22°F ~ 113°F							
LIFE TIME	> 50000 hours							
WARRANTY	5 year limited							

Selectable LED Glass Wall Pack light

WSD LED INC
Green Lighting Resources

Wattages: 28W,42W,56W,70W;48W,72W,96W,120W

DIMENSION:

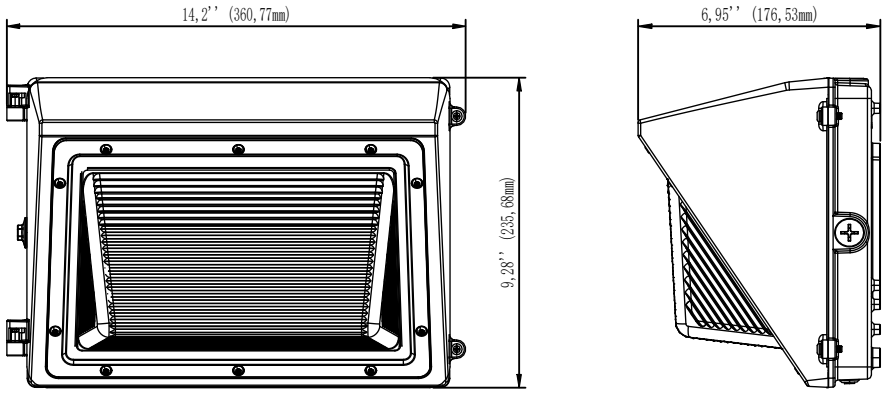

Specifications:

Shell materials: Aluminum & PC.
Finish: Dark Bronze(Standard)
Net weight : 8.16(lbs)
Product Size:
360.77mmX235.68mmX176.53mm
14.20”X9.28”X6.95”

Control Module:



Selectable CCT
Three position sliding switch
3000K / 4000K / 5000K


Selectable Power
Four position sliding switch
100% / 80% / 60% / 40%

EMERGENCY BACK-UP (SOLD SEPARATELY)



WSD-EMS8W27-XX
WSD-EMS15W27-XX
WSD-EMS20W27-XX
8W / 15W / 20W Emergency
Backup Battery LED Driver

Applicable Luminaire Models:
WSD-GWP2842567W27-345K-D-P-G2

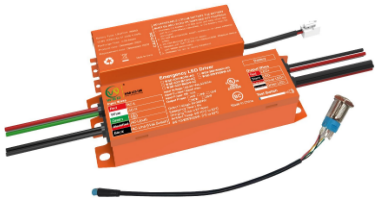

WSD-300YM08W-AC
WSD-300YM15W-AC
WSD-300YM20W-AC
WSD-300YM25W-AC
8W / 15W / 20W / 25W Emergency
Backup Battery LED Driver

Applicable Luminaire Models:
WSD-GWP48729612W27-345K-D-P-G2

Selectable LED Glass Wall Pack light

WSD LED INC
Green Lighting Resources

Wattages: 28W,42W,56W,70W;48W,72W,96W,120W

ORDERING INFORMATION:

EXAMPLE:


WSD-GWP2842567W27-345K-Z[D,W,B,S]-Y[Blank,P]-G2 / WSD-GWP48729612W27-345K-Z[D,W,B,S]-Y[Blank,P]-G2

WSD	GWP	2842567	27	345K	Z	Y	G2
COMPANY	PRODUCT	POWER	VOLTAGE	CCT	FINISH	CONTROL	UPDATE
WSD LED INC	**GWP** LED Glass Wall Pack light	**2842567** 28W/42W 56W/70W **48729612** 48W/72W 96W/120W	**27** AC120-277V	**345K** 3000K/4000K/5000K	D (Dark Bronze) W (White) B (Black) S (Silvery)	**P (**Photocell)	**Second generation product**


PHOTOMETRICS:

For complete IES files, please visit our website.

WSD-GWP2842567W27-345K **(28W&4000K)**

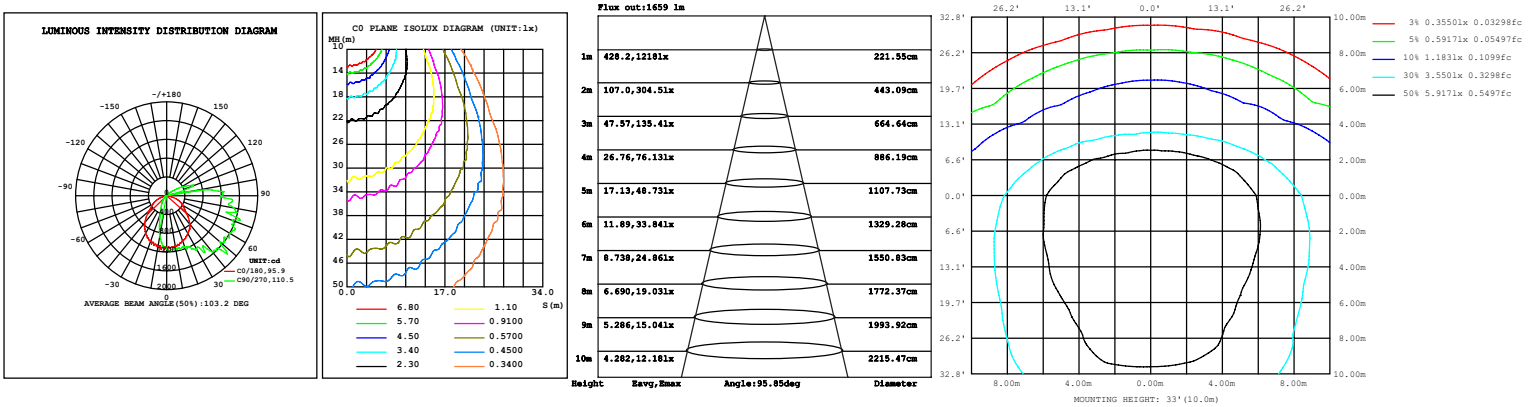

WSD-GWP2842567W27-345K **(42W&4000K)**

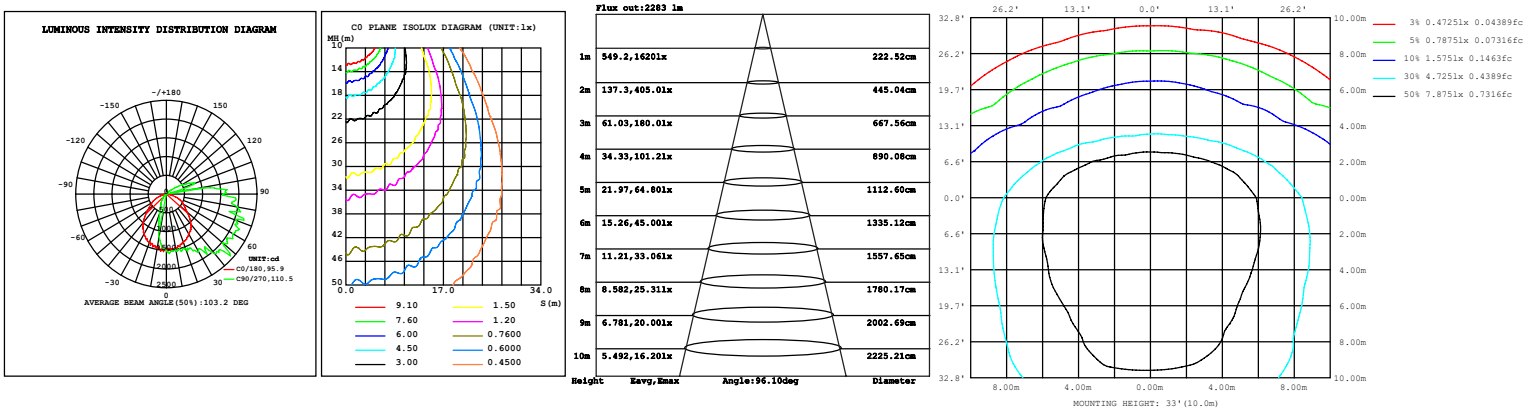

Selectable LED Glass Wall Pack light


WSD LED INC
Green Lighting Resources

Wattages: 28W,42W,56W,70W;48W,72W,96W,120W


PHOTOMETRICS:

For complete IES files, please visit our website.


WSD-GWP2842567W27-345K **(56W&4000K)**

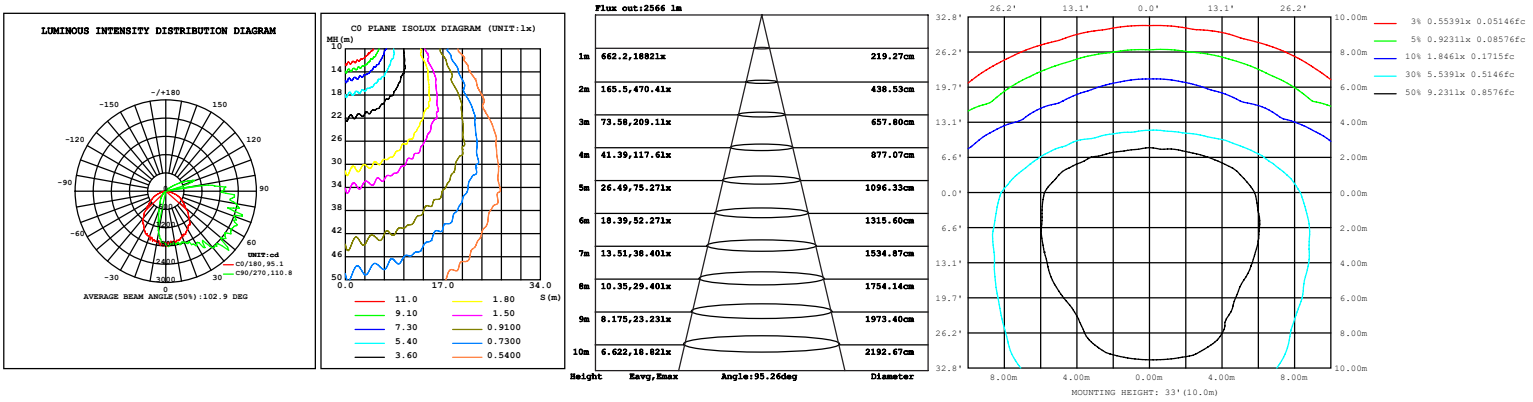

WSD-GWP2842567W27-345K **(70W&4000K)**

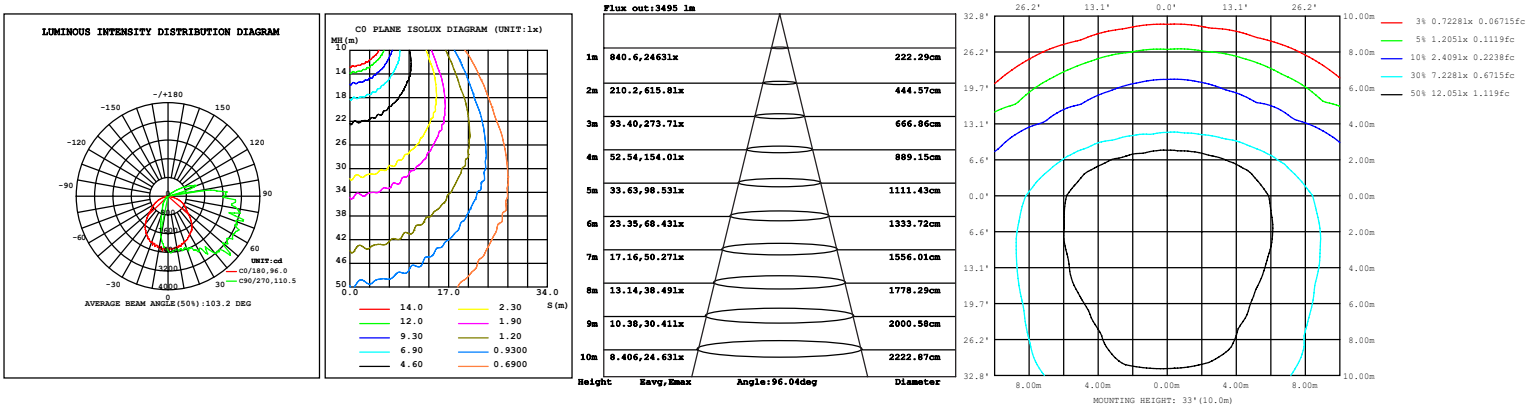

WSD-GWP48729612W27-345K **(48W&4000K)**

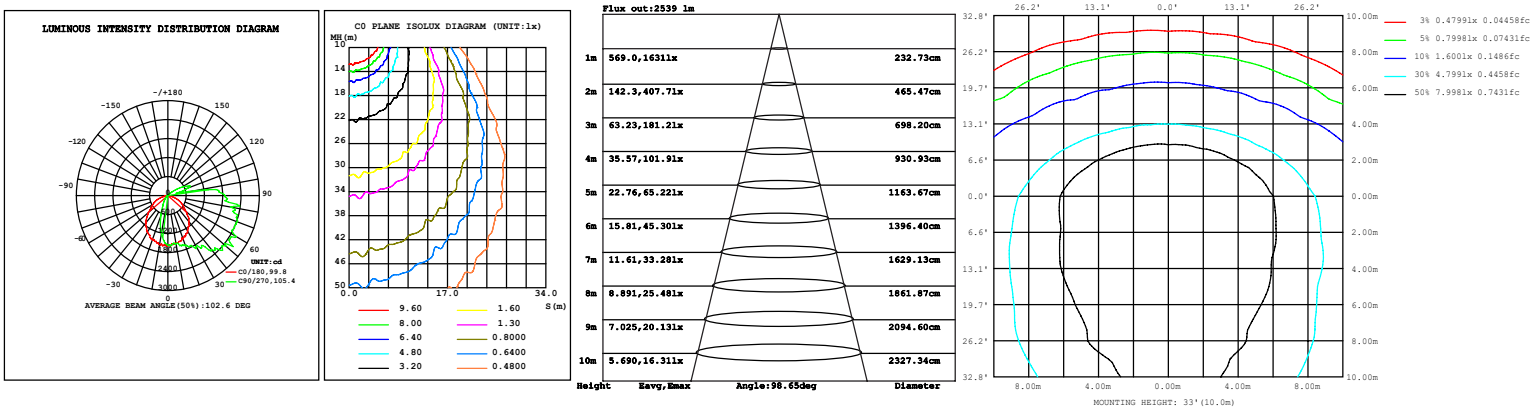

Selectable LED Glass Wall Pack light


WSD LED INC
Green Lighting Resources


Wattages: 28W,42W,56W,70W;48W,72W,96W,120W


PHOTOMETRICS:


For complete IES files, please visit our website.

WSD-GWP48729612W27-345K **(72W&4000K)**

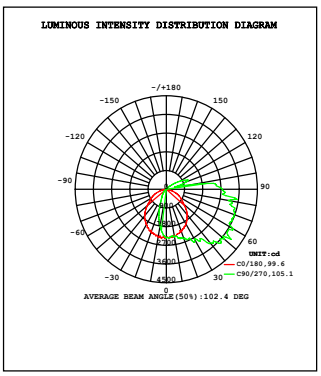


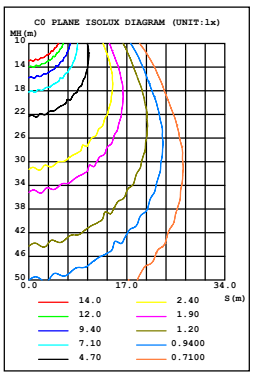


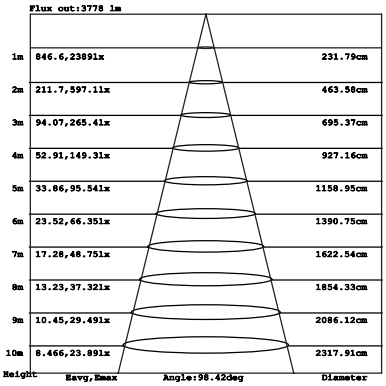


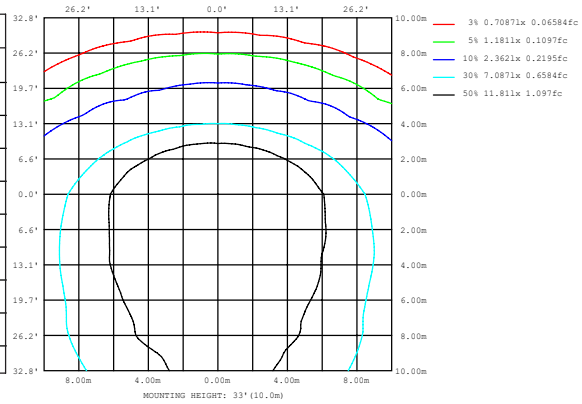


WSD-GWP48729612W27-345K **(96W&4000K)**

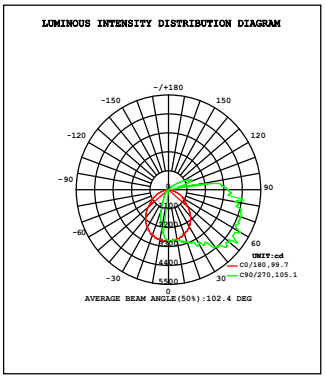

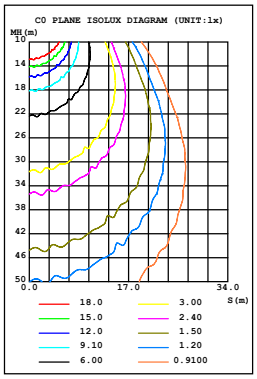

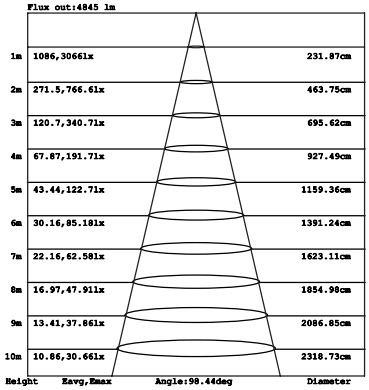

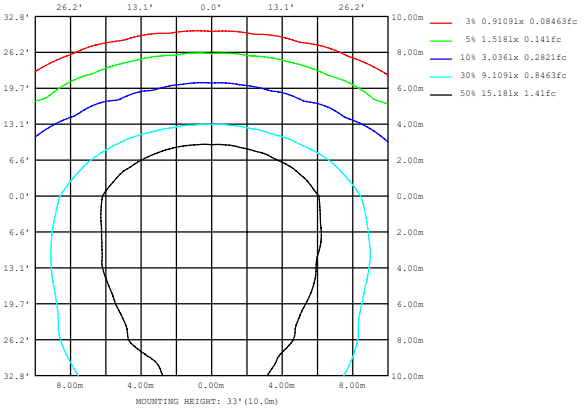

WSD-GWP48729612W27-345K **(120W&4000K)**

