Selectable UFO High Bay Light

Wattages: 85W, 120W, 150W ; 115W, 160W, 200W; 140W, 190W, 240W




Selectable UFO High Bay Light series can be widely used in outdoor or indoor lighting(Wet location),Excellent for Museums,Underground parking lot,**Workshop, warehouse, gymnasium**and many more applications.

E354939

- ♦ LED high luminous efficiency and long working life.
- ♦ High efficiency LED Driver, the wide range input voltage AC120-277V/ 277-480V.
- ♦ Die-cast aluminum cooling design, high quality and better cooling for LED Tj < 85℃.
- ♦ Excellent optics design, greatly improve the light utilization and evenness.
- ♦ Wireless bluetooth system and Motion sensor control available (Optional)
- ♦ 12Vdc auxiliary dimming

DIMENSION:

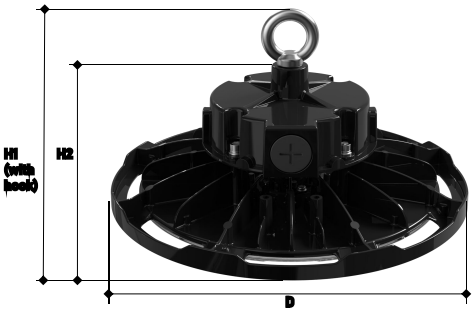

Size unit: inch(mm)

Size	150W	200W	240W
Diameter, D	10.2(260)	11.8(300)	13.4(340)
Height 1, H1*	6.1(154)	6.1(154)	6.5(164)
Height 2, H2*	4.3(110)	4.3(110)	4.7(120)

Structure Features:

- ♦ Shell materials: Aluminum & PC
- ♦ Finish:BLACK(Standard)
- ♦ Net weight : 85-150W:1.84Kg (4.06 lbs)
  115-200W:2.23Kg (4.90 lbs)
  140-240W:2.80Kg (6.17 lbs)
- ♦ P roduct Size : 85-150W:φ260X154mm(10.2"X6.1")
  115-200W:φ300X154mm(11.8"X6.1")
  140-240W:φ340X164mm(13.4"X6.5")
- ♦ Carton Size : 85-150W:277X274X139mm
  (10.91"X10.79"X5.47")
  115-200W:317X314X139mm
  (12.48"X12.36"X5.47")
  140-240W:358X354X143mm
  (14.09"X13.94"X5.63")

SPECIFICATION									
TYPE	WSD-UFO851215W27-3545K-B-H			WSD-UFO115160200W27-3545K-B-H			WSD-UFO141924W27-3545K-B-H		
WATTAGE	85W	120W	150W	115W	160W	200W	140W	190W	240W
LUMEN	12325lm	17400lm	21750lm	16675lm	23200lm	29000lm	20300lm	27550lm	34800lm
EFFICACY	> 145 lm/W								
CCT	3500K,4000K, 5000K								
CRI	80								
INPUT VOLTAGE	AC120-277V/277-480V								
BEAM ANGLE	89º								
POWER FACTOR	0.95								
DRIVER EFFICACY	90%								
DIMMING	0-10V dimming 12V Auxiliary power								
FACTORY SETTINGS	150W & 4000K			200W & 4000K			240W & 4000K		
LIFE SPAN	over 50,000 hrs								
WORKING TEMPERATURE	-22ºF ~ 113ºF								
STORAGE TEMPERATURE	-40ºF ~ 176ºF								
OUTDOOR RATING	Wet location								
CABLE	3 core, 18AWG (72 inch)								
WARRANTY	5 year limited								

Selectable UFO High Bay Light

Wattages: 85W, 120W, 150W ; 115W, 160W, 200W; 140W, 190W, 240W

Bluetooth® MOTION SENSOR and Bluetooth options (Option)


Hook (Standard)



Optical lens is made of high quality PC material to make the light even and soft.



High performance, die cast heat sink transfers heat from the light engine to the environment, via large coolinigns, drawing heat away from the i xture, and extending the lifespan of the LEDs.



Top tier LEDs are driven well below recommended safety limits, on both drive current and junction temperature, to keep components cool – maintaining the life of the LED, allowing for a compact and eficient heat sink design.



WATT/CCT SELECTABLE

Selectable CCT
Three position sliding switch
3500K / 4000K / 5000K

Selectable Power
Three position sliding switch
85W / 120W / 150W
115W / 160W / 200W
140W / 190W / 240W

EMERGENCY BACK-UP (SOLD SEPARATELY)





WSD-EMUFO40W347-R
40W Emergency Backup Battery

Available only for low-voltage (120-277Vac) Luminaire models

CONTROL (SOLD SEPARATELY)



Bluetooth®
NLC-BT-MW-SR-001
Bluetooth Microwave Fixture Sensor
(Silvair Bluetooth)



Bluetooth®
NLC-BT-MW-GE-001
Bluetooth Microwave Fixture Sensor
(GEBC Bluetooth)



NLC-MW-PT-002
Bi -level microwave Sensor



NLC-PIR-PT-001
Bi - Level PIR Motion Sensor



RC100
Remote Controller
(With NLC-MW-PT-002 and NLC-PIR-PT-001 use)




BRI-WS204-GE
4-Button Wireless Wall Switch
(Can only be used for NLC-BT-MW-GE-001)

MOUNTING (SOLD SEPARATELY)



Trunnion
Item: WSD-UFO-T
Trunnion, Mainly used for indoor or outdoor ceiling installation, can be directly mounted on the ceiling.



UFO High Bay Lights Pendant Adaptor
Item: PDUFO-M10-3/4
Main Parameters: bottom screw M10, top thread NTP3/4"
Material: Aluminum



HOOK
Item:
WSD-UFO-HOOK
Main Parameters:
bottom screw M10

Selectable UFO High Bay Light

Wattages: 85W, 120W, 150W ; 115W, 160W, 200W; 140W, 190W, 240W

ACCESSORIES (SOLD SEPARATELY)



WIRE GUARD
Item:
WSD-UFO-PNC-150W
WSD-UFO-PNC-200W
WSD-UFO-PNC-240W



Polycarbonate Cover
Item:
WSD-UFO-PC-150W
WSD-UFO-PC-200W
WSD-UFO-PC-240W



Glare shield on lens bottom
Item:
WSD-UFO-BPC-150W
WSD-UFO-BPC-240W
(200W/240W UFO share the model WSD-UFO-BPC-240W)

UFO block dust plate
Item: WSD-UFO-150BP
(Can only be used for WSD-UFO-BPC-150W)



Aluminum Lamp Shade
Item:
WSD-UFO-150W-ALS
WSD-UFO-200W-ALS
WSD-UFO-240W-ALS

ORDERING INFORMATION

EXAMPLE:WSD-UFO851215W27-3545K-Z[D,W,B,S]-U[H,T]-E[Blank,M] / WSD-UFO141924W27-3545K-Z[D,W,B,S]-U[H,T]-E[Blank,M]

WSD	UFO	851215W	27	3545K	Z	U	E
COMPANY	PRODUCT	WATTAGE	VOLTAGE	CCT	FINISH	MOUNTING	CONTROL
WSD LED INC	**UFO** (UFO High Bay Light)	**851215W** 85W/120W/150W **115160200W** 115W/160W/200W **141924W** 140W/190W/240W	**27** (AC120-277V) **48** (AC277-480V)	**35K** - (3500K) **4K** - (4000K) **5K** - (5000K)	**D** - (Dark Bronze) **W** - (White) **B** - (Black) **S** - (Silver)	**H** -(Hook) **T** -(Trunnion)	**M** -(Motion Sensor)

Selectable UFO High Bay Light

WSD LED INC
Green Lighting Resources

Wattages: 85W, 120W, 150W ; 115W, 160W, 200W; 140W, 190W, 240W




NLC-BT-MW-SR-001
Plug and Play Network BLE Nodes and Sensor

The Bluetooth Lighting Control provides automated individual and group control of light fixtures using on sensors and Bluetooth sigmesh technology. The NLC-BT-MW-SR-001 mounted in an Commercial lighting fixture and provides multi-level control solution based on motion and or daylight harvesting contribution.


FEATURES

- Lighting controls meet design lights consortium (DLC) networked lighting control system technical requirements.
- Quick connect and adjust different sensor angle.
- Easy commissioning with Mobile App (Available in IOS or Android).
- Bluetooth network with Saas working by computer
- Individual addressability and/or grouping.
- Time clock scheduling for individual lights, groups or scenes.
- Multi-level dimming: manual ON/OFF automatic ON/OFF, and automatic partial ON/OFF, daylight harvesting control capability.

DIMENSION

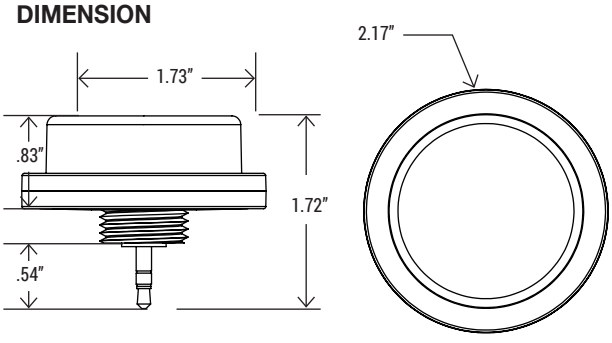

COVERAGE

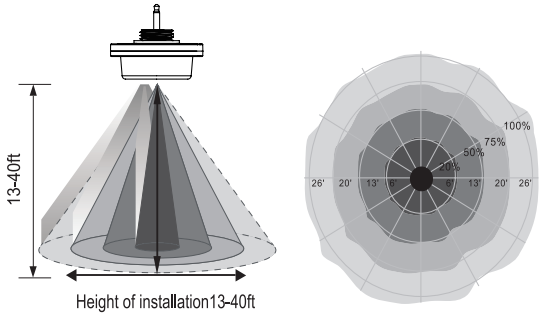

MICROWAVE SENSOR FEATURES	
DAYLIGHT HARVESTING	On/Off
MOTION SENSING	On/Off
FIRST TIME DELAY	1-59 mins/infinite
SECOND TIME DELAY	0-59 mins/infinite
DIM LEVEL	0-100%
MOUNTING HEIGHT	13-40ft
DETECTION RANGE	up to 52ft diameter
DETECTION: HORIZONTAL	360°
DETECTION: VERTICAL	90°

COMMISSIONING

Silvair iOS App or Android makes it easy to pair devices, create groups, set scenes/schedules, customize dimming levels, and adjust high trim based on application needs.

SPECIFICATION	
NETWORK BLE MESH	Yes
DAYLIGHT HARVESTING	Yes
MICROWAVE MOTION SENSOR	Yes
DETECTION MODE	Occupancy/Vancancy/Bi-level in 1 Unit
OPERATING VOLTAGE	12-24V DC
OPERATING CURRENT	>50mA
SINKING CURRENT	max. 25mA
CONTROL OUTPUT	0-10V
RADIO FREQUENCY	2.4GHz ± 75MHz
WIRELESS STANDARD	BLE 5.0 MESH
PRORGRAMMING	Silvair iOS App (IOS or Android)
CYBERSECURITY	UL
ENCRYPTION	AES 128-bit
MESH RANGE	60ft node-to-node and 500ft node-to-device (Commissioning)
SAFETY	cULus Listed
FCC	FCC
OPERATING TEMP.	-20°C - +60°C
IP RATING	IP65
WARRANTY	5 year limited

Please scan and download the app.

Silvair App

iOS


Operation Instruction:
https://youtu.be/8KWPK7z_Tng

Android:

When using silvair, you can search for silvair in Android Google play to download and install it

Selectable UFO High Bay Light

Wattages: 85W, 120W, 150W ; 115W, 160W, 200W; 140W, 190W, 240W

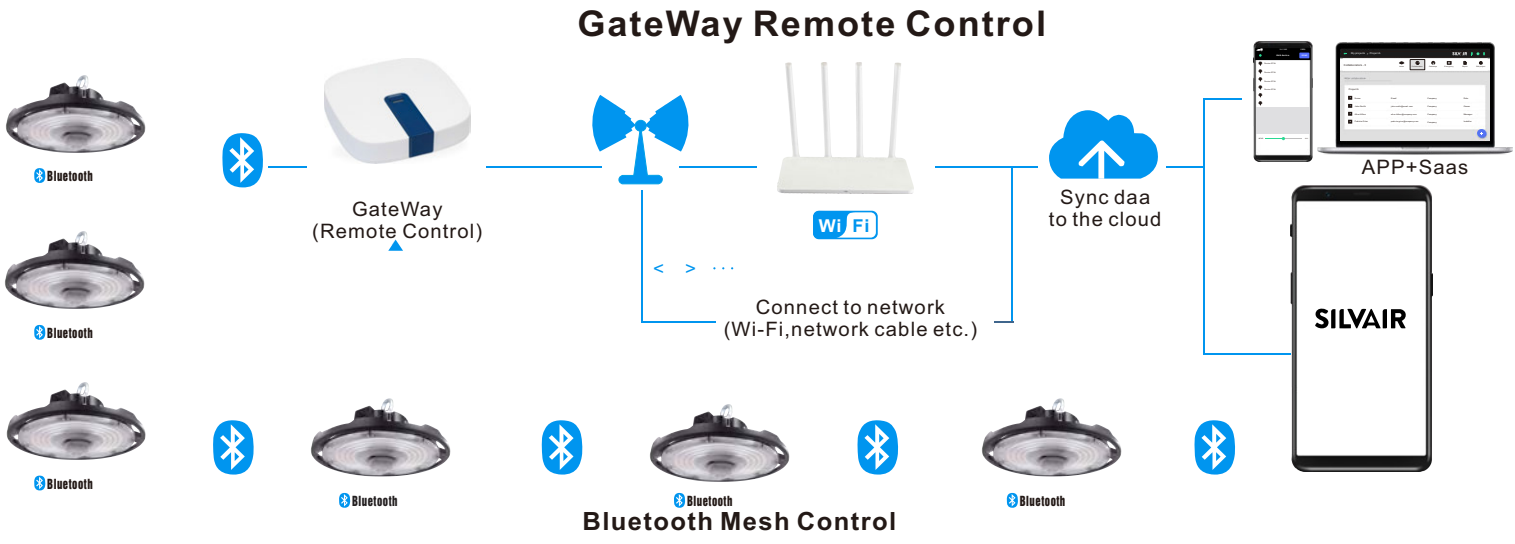



Functions:

The Silvair Gateway enables the following functions in the Silvair web app:

- Scheduling (available by default)
  - ○Scheduling changes in scenes and lighting control scenarios (for example occupancy sensing,daylight harvesting) for specific times or days.
- Energyand occupancy monitoring (additional paid service)
  - ○Visualizing energy use and occupancy via the Silvair web app.
  - ○Downloading energy and occupancy via the Silvair web app and cloud-based API.
- Remote monitoring and control (additional paid service)
  - ○ Low-latency monitoring of the status of devices in the network via API.
  - ○ Low-latency control of devices in the network via API. ● System diagnostics
  - ○ Monitoring of the status of Bluetooth mesh networks.
  - ○ Remote troubleshooting of networking issues.

Features:

- ●Future-proof Linux operating system.
- ●Simple commissioning using the Silvair Commissioning tools.
- ●Automatic connection to the Silvair cloud.
- ●Secure provisioning with secure IDs and encrypted keys.
- ●High level of hardware and software security (secure boot and encrypted file system can only be accessed with the management platform).
- ●Automatic security updates.
- ●Prompt releases of OS updates and fixes to vulnerabilities.
- ●Low-latency transfer of network, luminaire, and sensor status data to the Silvair cloud.
- ●Schedule caching.
- ●Automatic remote firmware updates.
- ●Display of gateway and network performance metrics (requires the Silvair web app).

INDUSTRIAL GATEWAY

SGW-101
Smart Engineering Gateway

The Silvair Gateway connects Bluetooth mesh networks that have been commissioned using the Silvair Commissioning tools to the Silvair cloud. This allows the scheduling of events and delivery of services based on the data generated by these networks.

SPECIFICATION	
POWER SUPPLY	4.5–5.5 V DC, 2 A Power over Ethernet 36–57 V DC (IEEE 802.3af)
OPERATING SYSTEM	Ubuntu Core
PROCESSOR	i.MX6ULL (Y2), 32-bit ARM 800 MHz
MEMORY	512 MB DDR3L SDRAM 8GB eMMC
COMMUNICATION PROTOCOLS	Bluetooth mesh (2.4 GHz Bluetooth Low Energy) Wi-Fi 802.11a/b/g/n/ac (2.4/5 GHz) 4G LTE Cat 1 with 2G/3G (only for Cascade-500-W and Cascade-500-X gateways)
PORTS	1 x RJ45 10/100 Ethernet 1 x USB 2.0 Type-A 2 x external dipole antenna, 5 dBi (only for Cascade-500-W and Cascade-500-X gateways)
REQUIRED AMBIENT TEMPERATURE	0°C to 60°C 32°F to 140°F
ENCLOSURE DIMENSIONS	127 mm x 127 mm x 30 mm (5 inch x 5 inch x 1.2 inch)
MOUNTING POSITION	Wall or surface mounted. As close to the geometrical center of the lighting network as possible, but as far as possible from potential sources of interference.
SECURITY	Secure boot with encrypted operating system Secure communication with the Silvair Cloud over Internet (TLS) Secure communication with devices over qualified Bluetooth mesh


Selectable UFO High Bay Light

Wattages: 85W, 120W, 150W ; 115W, 160W, 200W; 140W, 190W, 240W


PHOTOMETRICS

For complete IES iles, please visit our website.

WSD-UFO851215W27-3545K (150W 4000K)

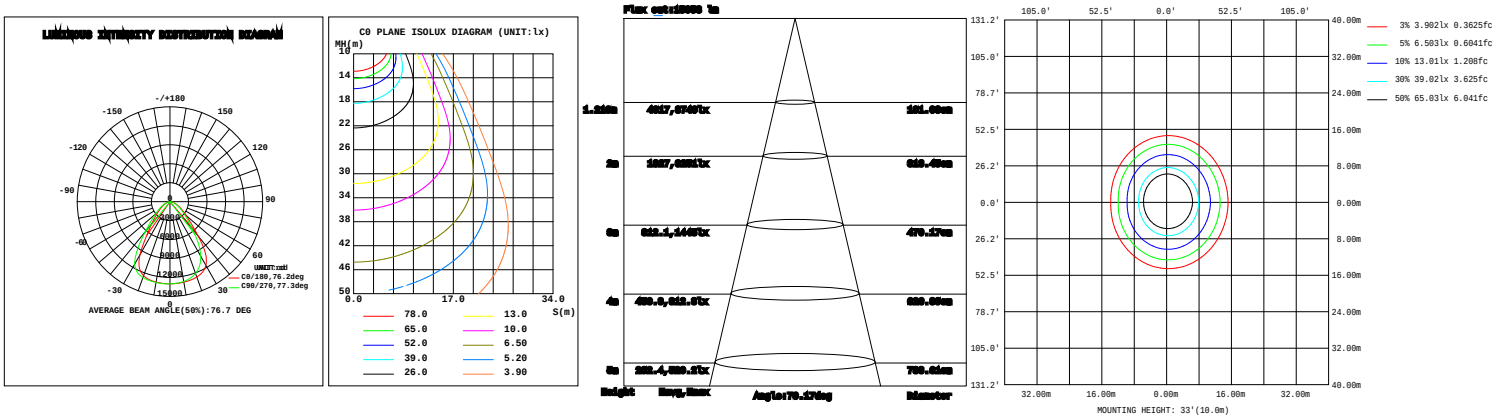

WSD-UFO115160200W27-3545K (200W 4000K)

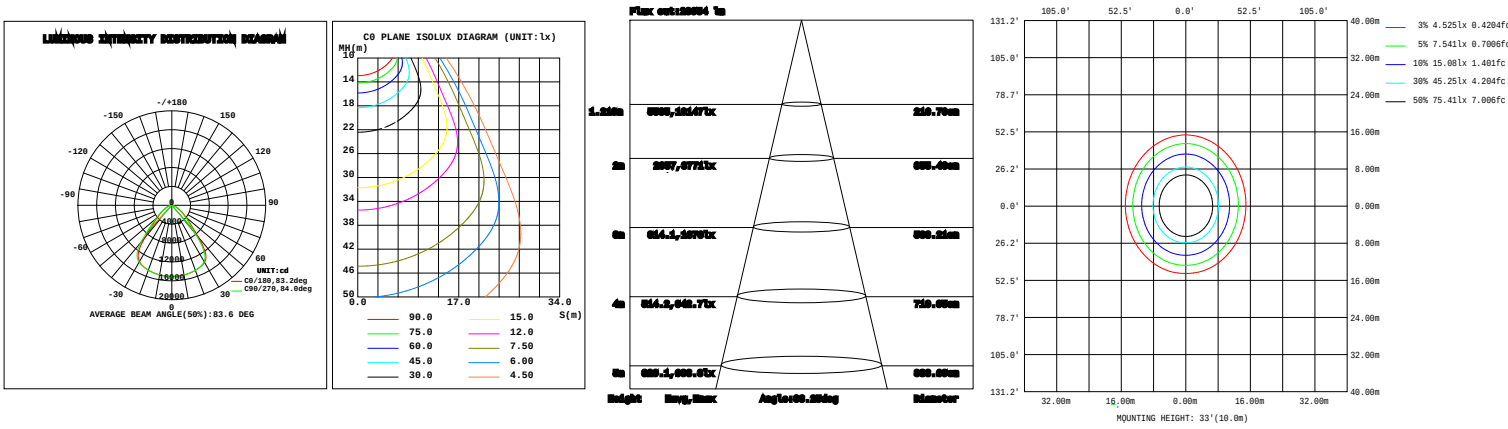

WSD-UFO141924W27-3545K (240W 4000K)

