



KT-W-LED-4-33-850-P

4' LED WRAP FIXTURE



33W, 120-277V Input, 0-10V Dimming

PRODUCT FEATURES

- Powered by 0-10V dimming LED drivers
- Standard prismatic style lens
- 0-10V dimming, 10% minimum
- Compatible with emergency LED drivers
- 5000K Color Temperature
- Compatible with 480-277V step down transformers
- Compatible with occupancy sensors
- Ambient operating temperature: -20°C/-4°F to 50°C/122°F
- UL Listed 1598: Suitable for dry and damp locations
- THD: <20%
- Power factor > 0.95
- Emergency Mode Lumens: 500lm for 90 mins



AVAILABLE MODIFICATIONS (WITH VOLUME ORDER)

- Lumen targets
- Frame colors


PERFORMANCE SPECIFICATIONS

Catalog Number	Color Temp	Nominal Length	Input Voltage	Wattage	CRI	Lumen Output	Efficacy
W-LED-4-33-835-P	3500K	4'	120-277V	33W	80	4220	128 lm/W
W-LED-4-33-840-P	4000K	4'	120-277V	33W	80	4257	129 lm/W
W-LED-4-33-850-P	5000K	4'	120-277V	33W	80	4290	130 lm/W

W-LED-4-33-8XX-P

4' LED WRAP FIXTURE


PHOTOMETRIC SPECIFICATIONS

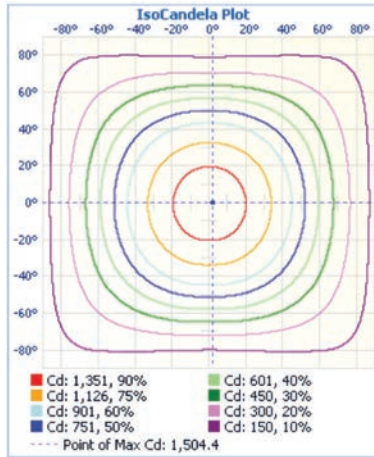

Zonal Lumen Summary		
Zone	Lumens	% Luminaire
0-30	1,126.7	26.5%
0-40	1,811.7	42.7%
0-60	3,099.6	73%
60-90	891.0	21%
70-100	494.8	11.6%
90-120	167.7	3.9%
0-90	3,990.6	93.9%
90-180	257.2	6.1%
0-180	4,247.7	100%

PHYSICAL SPECIFICATIONS

47.7"

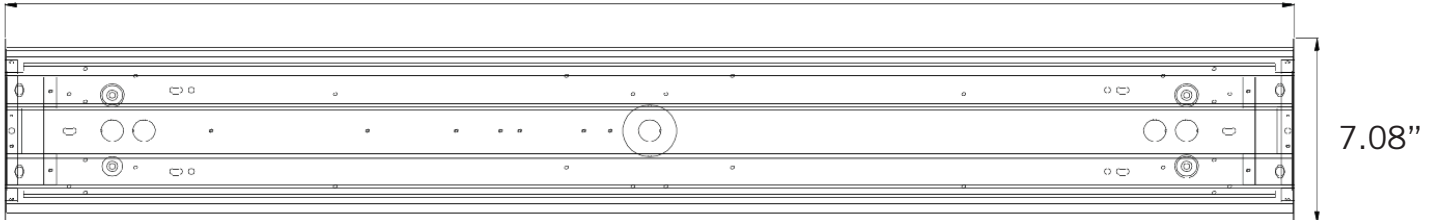

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
W-LED-4-33-835-P	Carton Pack	1	Active
W-LED-4-33-840-P	Carton Pack	1	Active
W-LED-4-33-850-P	Carton Pack	1	Active