UFO High Bay

INSTRUCTION MANUAL

- Thank you for purchasing our UFO High Bay. Please read the below articles carefully to see how to use this product safely.
- Warning: Contents and attention contents related to product safety use, please be sure to follow it.

WARNING!

- This UFO High Bay is within the input voltage range: 100-277VAC, 50/60Hz.
- If input voltage exceeds this range, it may cause light failure. Please be sure to operate under correct input voltage.
- Ensure ambient operating temperature of -40°F (-40°C) through 113°F (45°C).
- Using this UFO High Bay in temperatures outside of this range will reduce the UFO High Bay lifespan.
- Make sure to turn off power before starting the installation process.

ATTENTION!


- IP Rating: IP65, can work under wet locations.
- Please keep the UFO High Bay away from any corrosive substances. When you clean it, please use damp or dry cloth.

Model Number	JEN-UFO-150/100/100W-H-TP(50)	JEN-UFO-240/200/200w-H-TP(50)
Power	Wattage Adjustable 100W/150W	Wattage Adjustable 200W/240W
Input Current	1.1A/1.65A	2.2A/2.64A
Input Voltage	AC100-277V	
Frequency	50/60Hz	


"XXK" can be "40K", "50K", "57K", "65K"
"(XX)" can be (MS), (PIR), (BRT) to indicate Microwave Sensor, PIR Motion Sensor, Motion Sensor with Bluetooth or blank to indicate without Motion Sensor.

INSTALLATION INSTRUCTIONS

1. Rings Type:

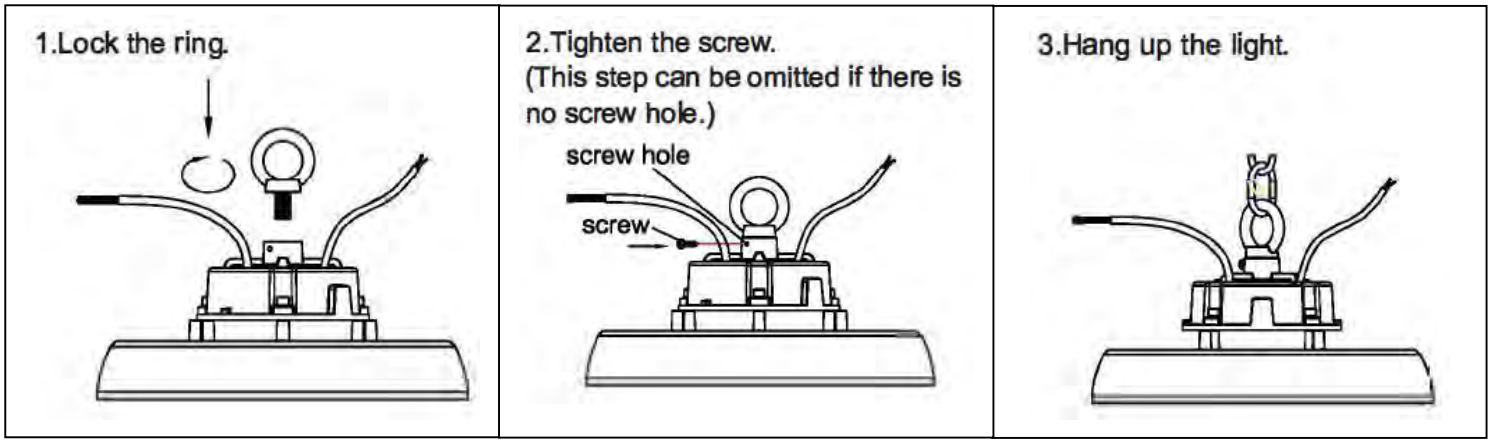



2. Hook Type:

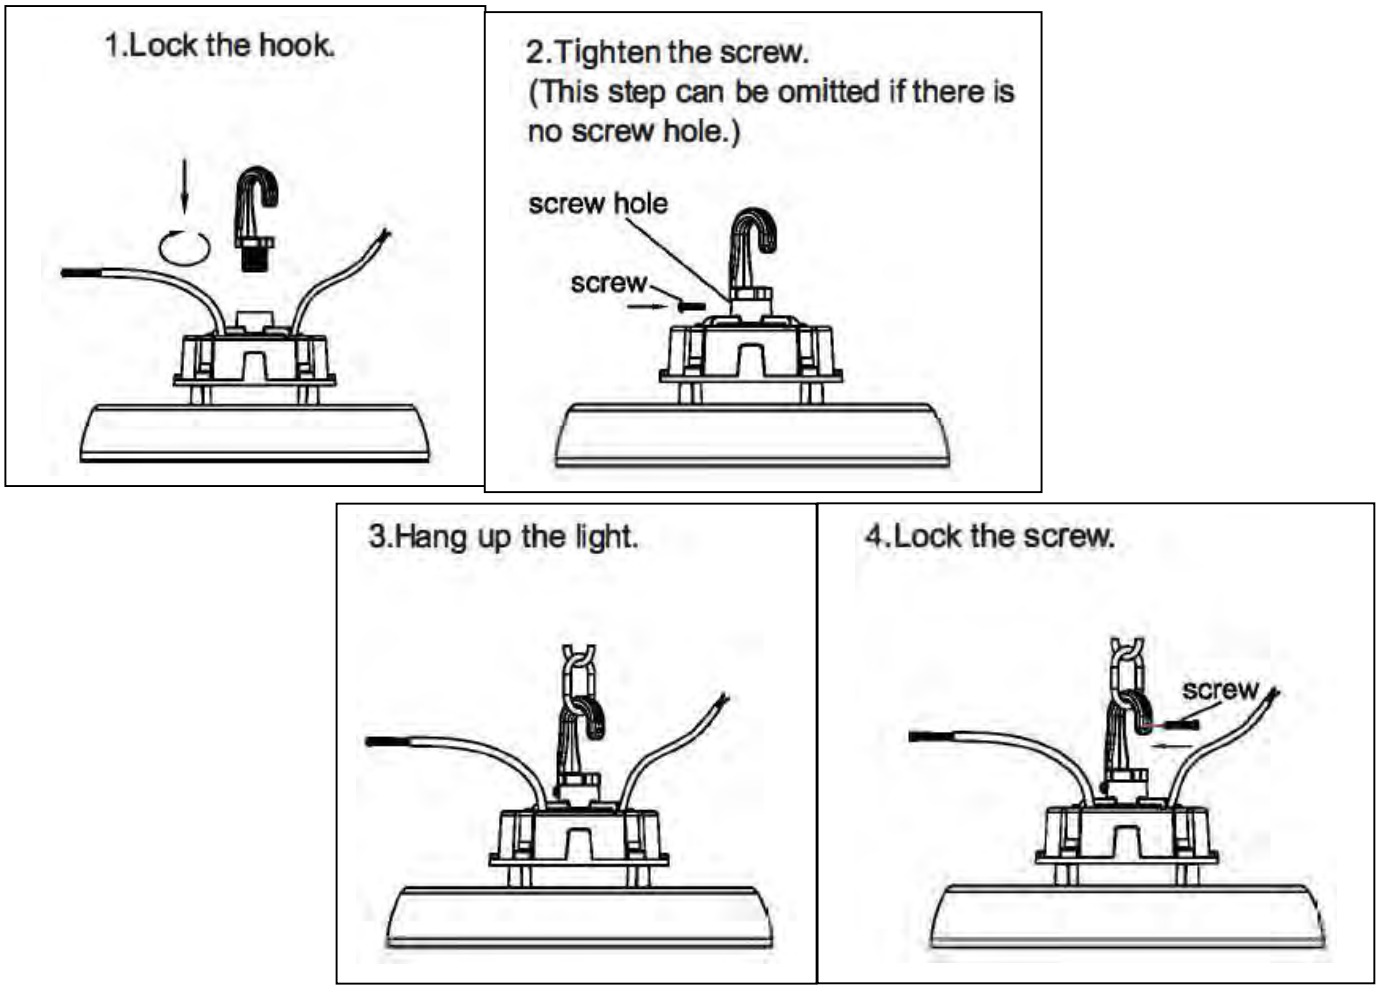


PRODUCT DIMENSIONS


1. Rings Type:

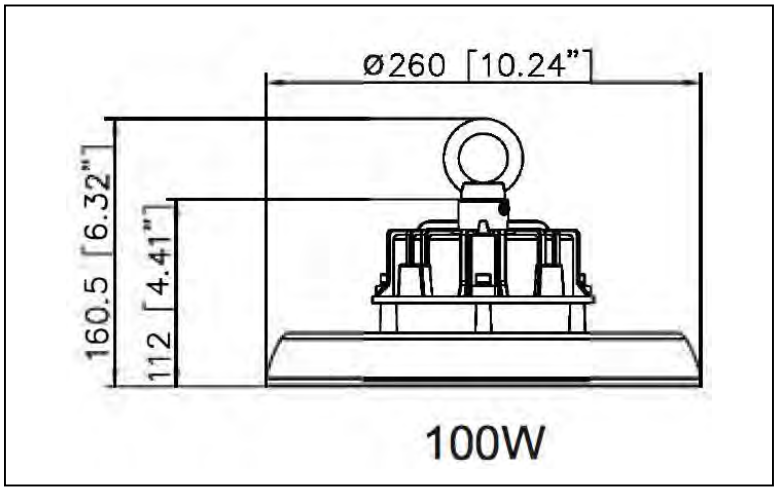

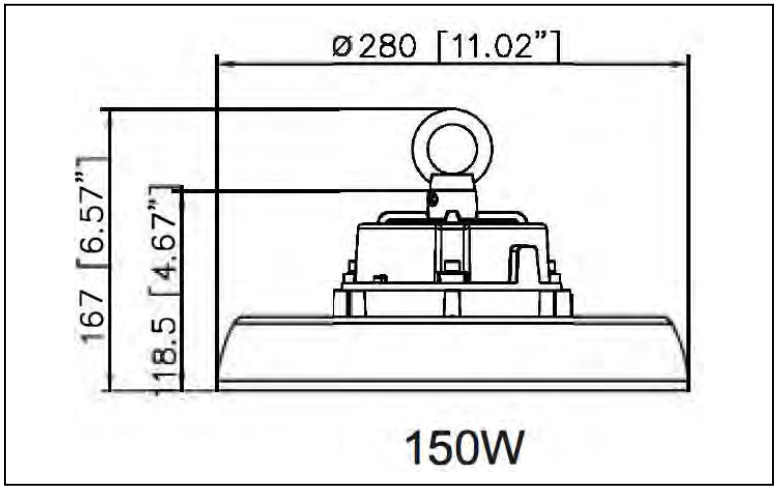

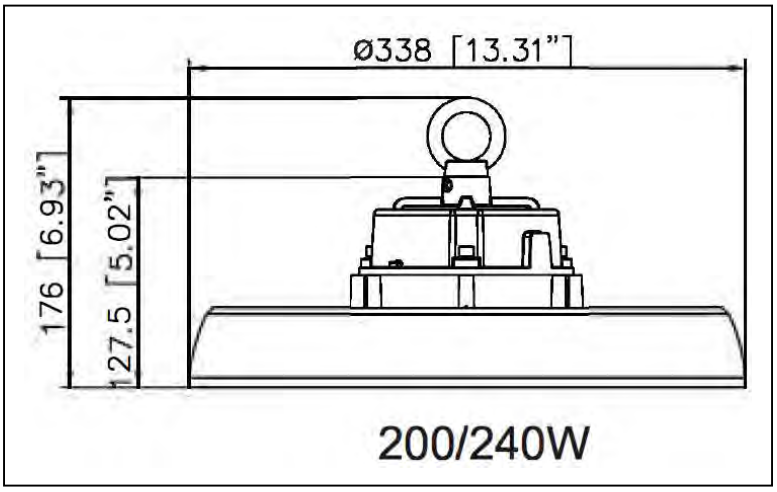

2. Hook Type:

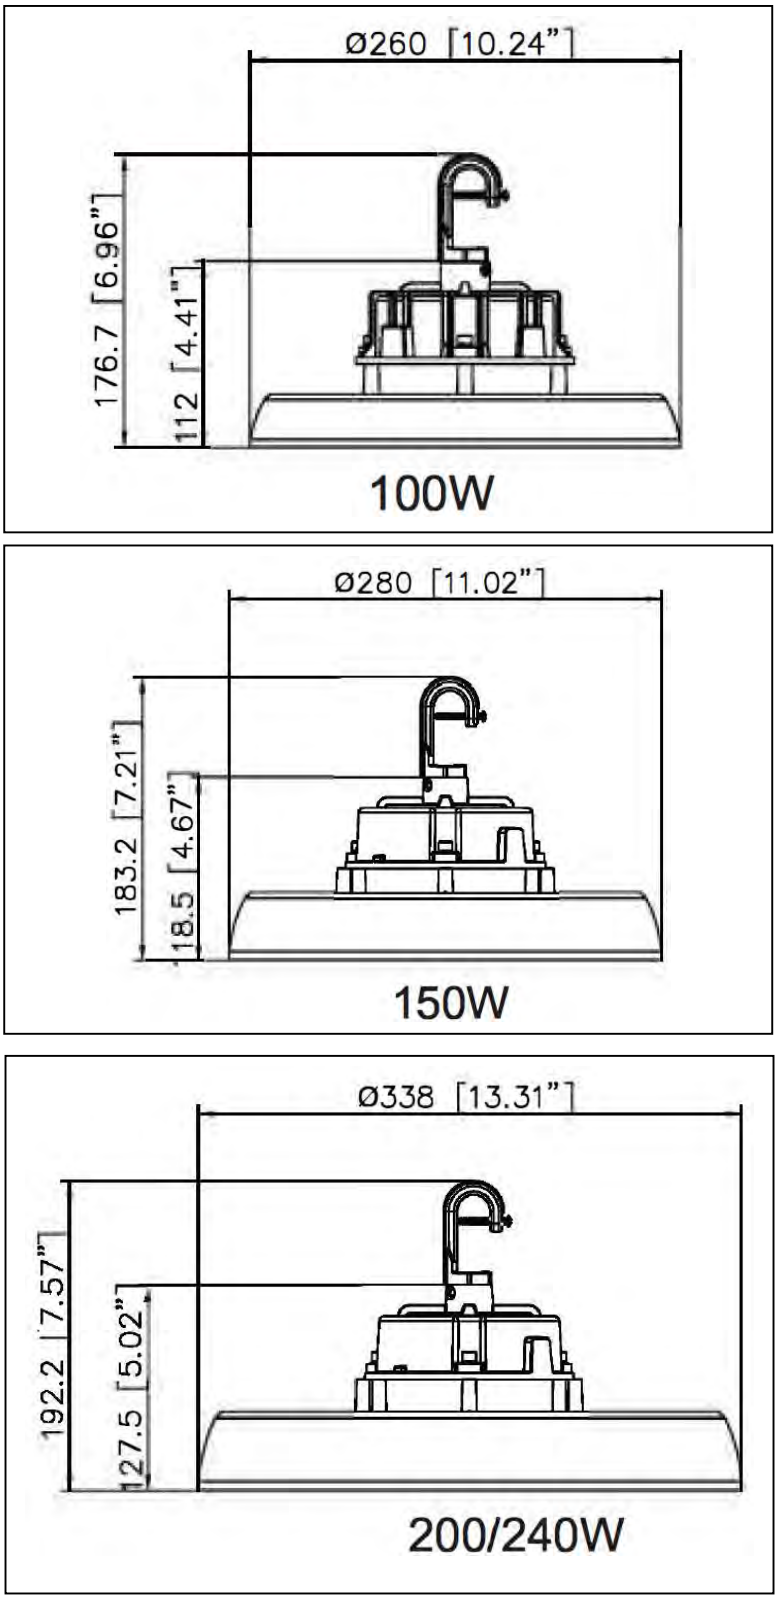

Ø260 [10.24"]
176.7 [6.96"]
112 [4.41"]
100W
Ø280 [11.02"]
183.2 [7.21"]
18.5 [4.67"]
150W
Ø338 [13.31"]
192.2 [7.57"]
127.5 [5.02"]
200/240W

WIRING CONNECTION

Turn off the power, connect AC wire, black wire to L, white wire to N, and green wire to E.

Dimmer connection (with dimmable driver)

1. Compatible with 1-10V dimming.
2. Connect wires as below, purple wire is D+, pink wire is D-, cap red wire.

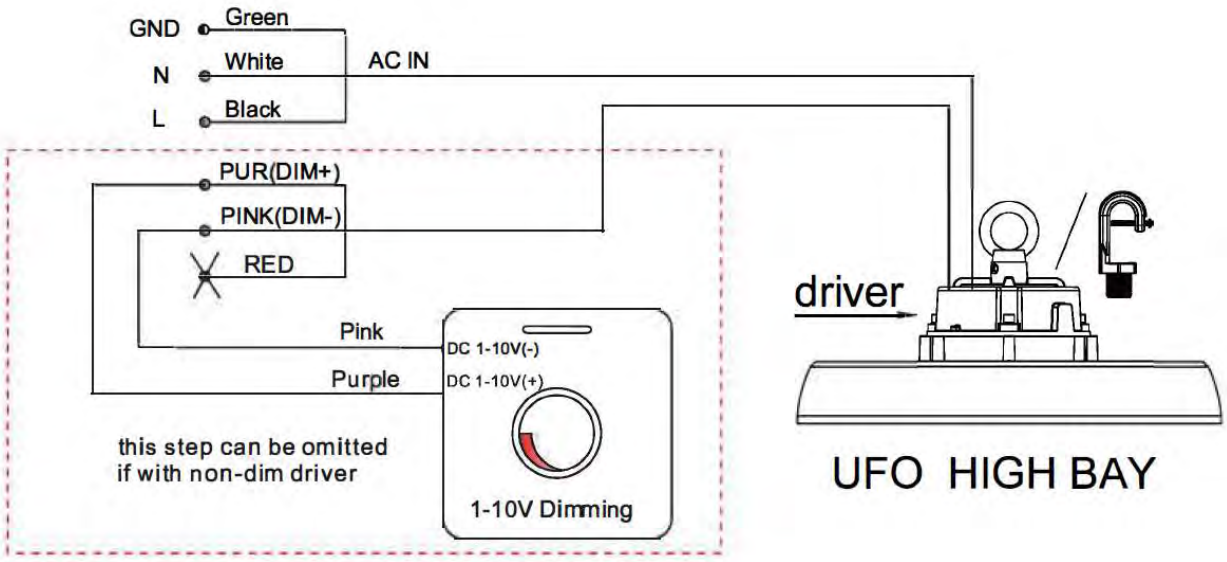

The installation must be carried out by a qualified electrician.