



NYC Approved LED Red Exit - Battery Backup

Long Life, Maintenance Free Ni-Cad Battery

City of New York approved heavy duty emergency exit unit offers high efficiency in an easy to install, durable package.

This self-contained unit with sturdy steel design meets the requirements of all five boroughs of New York City. Emergency unit is OSHA compliant and contains a long lasting Ni-Cad battery backup for essential illumination during a power outage.

FEATURES

- 120/277V dual voltage operation
- Red EXIT letters - 8" height and 1" stroke
- 20-gauge steel housing with white powder coating
- Ceiling, wall, or side mounting capability (canopy included)
- Test switch and AC supply indicator
- Removeable knockout chevron directional arrows
- Battery backup with accessible test button for 90 minutes of illumination during a power outage
- Suitable for damp locations
- Meets UL924, NFPA 101, NEC, and OSHA standards

APPLICATIONS

- Emergency lighting for office, industrial, retail and other public spaces




**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.

GENERAL SPECIFICATIONS

Input Voltage: 120/277V (dual voltage)
Frequency: 50/60 Hz
Dimmability: No
Avg. Rated Life: 500 uses
Wet / Damp / Dry Location: Damp
Construction: Steel
Recharge time: 24 hrs
Runtime: >= 90 minutes
Unit Weight: 6.39 lbs
Battery Backup: 3.6V, 400mA Ni-Cad
Ambient Operating Temperature: 50°F to 104°F

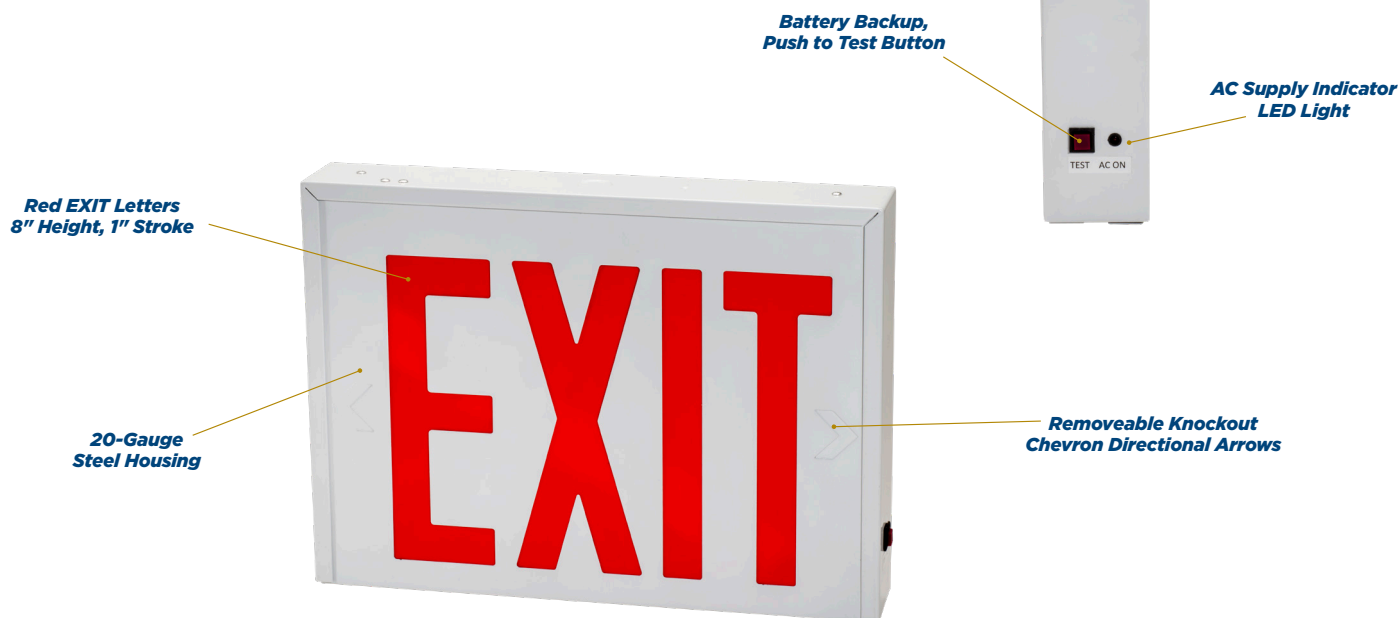

SPECIFICATIONS / ORDER INFO

Catalog Number	Order Code	UPC	Mounting	Dimensions	Pk-Qty
ES/LED/RW/B-NYC	75120	751338031876	Wall, side or ceiling	14.5" x 2.3" x 10.5"	4-PK

NOMENCLATURE

Example: **ES/LED/RW/B-NYC**

ES=Exit Sign / **LED**=LED / **RW**=Red Letters / **B**=Battery Backup / **NYC**=New York City Approved

